


SBD Type : KCQ60A06

OUTLINE DRAWING

FEATURES

- * Similar to TO-247AC(TO-3P)Case
- * Dual Diodes Cathode Common
- * Low Forward Voltage Drop
- * Low Power Loss,High Efficiency
- * High Surge Current Capability
- * 40 Volts thru 60 Volts Types Available

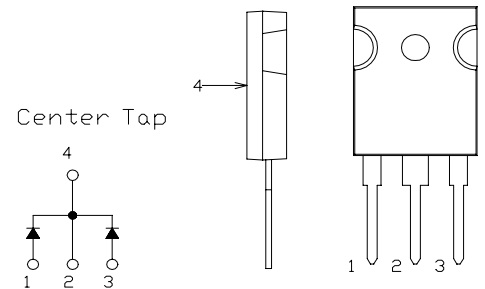

Maximum Ratings


Approx Net Weight: 5.55g

Rating	Symbol	KCQ60A06			Unit
Repetitive Peak Reverse Voltage	V _{RRM}	60			V
Average Rectified Output Current	I _O	60	Tc=69℃	50 Hz Full Sine Wave Resistive Load	A
RMS Forward Current	I _{F(RMS)}	66.6			A
Surge Forward Current	I _{FSM}	400	50Hz Full Sine Wave ,1cycle Non-repetitive		A
Operating JunctionTemperature Range	T _{jw}	-40 to +150			℃
Storage Temperature Range	T _{stg}	-40 to +150			℃
Mounting torque	F _{tor}	recommended torque = 0.5			N•m

Electrical • Thermal Characteristics

Characteristics	Symbol	Conditions	Min.	Typ.	Max.	Unit
Peak Reverse Current	I_{RM}	$T_j= 25^{\circ}C, V_{RM}= V_{RRM}$ per Arm	-	-	25	mA
Peak Forward Voltage	V_{FM}	$T_j=25^{\circ}C, I_{FM}=30A$ per Arm	-	-	0.67	V
Thermal Resistance	$R_{th(j-c)}$	Junction to Case	-	-	1.0	$^{\circ}C/W$

KCQ60A06 OUTLINE DRAWING (Dimentions in mm)

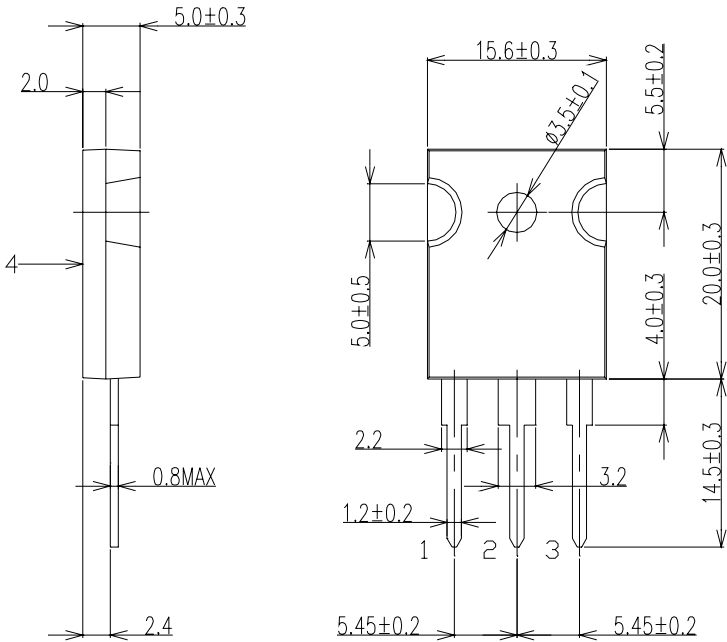

Center Tap

