


FRD Type : KCF25A20

OUTLINE DRAWING

FEATURES

- * Similar to TO-247AC (TO-3P) Case
- * Dual Diodes – Cathode Common
- * Ultra – Fast Recovery
- * Low Forward Voltage Drop
- * High Surge Capability
- * 200 Volts thru 400 Volts Types Available

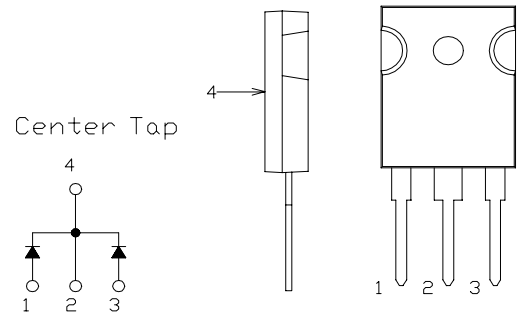

Maximum Ratings


Approx Net Weight:5.55g

Rating	Symbol	KCF25A20			Unit
Repetitive Peak Reverse Voltage	V _{RRM}	200			V
Non-repetitive Peak Reverse Voltage	V _{RSM}	220			V
Average Rectified Output Current	I _O	25	Tc=93℃	50 Hz,Full Sine Wave Resistive Load	A
RMS Forward Current	I _{F(RMS)}	28			A
Surge Forward Current	I _{FSM}	150	50 Hz Full Sine Wave,1cycle Non-repetitive		A
Operating JunctionTemperature Range	T _{jw}	- 40 to + 150			℃
Storage Temperature Range	T _{stg}	- 40 to + 150			℃
Mounting torque		0.5	Recommended value		N•m

Electrical • Thermal Characteristics

Characteristics	Symbol	Conditions	Min.	Typ.	Max.	Unit
Peak Reverse Current	I_{RM}	$T_j=25^{\circ}\text{C}, V_{RM}=V_{RRM}$ per Arm	-	-	25	μA
Peak Forward Voltage	V_{FM}	$T_j=25^{\circ}\text{C}, I_{FM}=12.5\text{A}$ per Arm	-	-	0.98	V
Reverse Recovery Time	t_{rr}	$I_{FM}=10\text{ A},$ $-di/dt= 50\text{ A}/\mu\text{s}, T_a= 25^{\circ}\text{C}$	-	-	50	ns
Thermal Resistance	$R_{th(j-c)}$	Junction to Case	-	-	2	$^{\circ}\text{C}/\text{W}$

KCF25A20 OUTLINE DRAWING (Dimensions in mm)

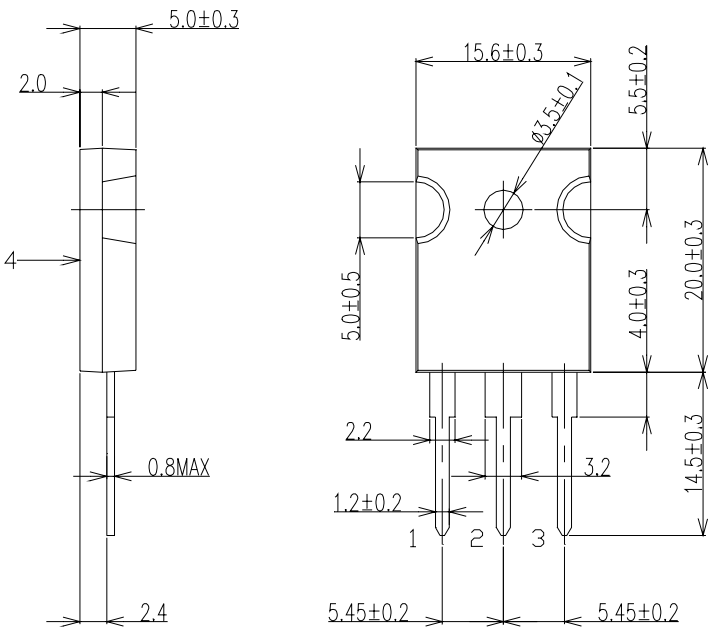

Center Tap

