

KSC5019

Low Saturation

• $V_{CE}(sat)=0.5V$ at $I_{C}=2A$, $I_{B}=50mA$



1. Emitter 2. Collector 3. Base

NPN Epitaxial Silicon Transistor

Absolute Maximum Ratings T_a =25°C unless otherwise noted

Symbol	Parameter	Value	Units
V_{CBO}	Collector-Base Voltage	30	V
V _{CES}	Collector-Emitter Voltage	30	V
V_{CEO}	Collector-Emitter Voltage	10	V
V_{EBO}	Emitter-Base Voltage	6	V
I _C	Collector Current (DC)	2	Α
I _{CP}	* Collector Current (Pulse)	5	Α
I _B	Base Current	2	А
P _C	Collector Power Dissipation	750	mW
TJ	Junction Temperature	150	°C
T _{STG}	Storage Temperature	-55 ~ 150	°C

^{*} PW≤10ms, Duty Cycle≤30%

Electrical Characteristics T_a =25°C unless otherwise noted

Symbol	Parameter	Test Condition	Min.	Тур.	Max.	Units
I _{CBO}	Collector Cut-off Current	V_{CB} =30V, I_{E} =0			100	nA
I _{EBO}	Emitter Cut-off Current	$V_{EB}=6V$, $I_{C}=0$			100	nA
BV _{CEO}	Collector-Emitter Breakdown Voltage	I _C =10mA, I _B =0	10			V
BV _{EBO}	Emitter-Base Breakdown Voltage	I _E =1mA, I _C =0	6			V
h _{FE1}	DC Current Gain	V _{CE} =1V, I _C =0.5A	140		600	
h_{FE2}		$V_{CE}=1V$, $I_{C}=2A$	70	200		
V _{CE} (sat)	Collector-Emitter Saturation Voltage	I _C =2A, I _B =50mA		0.2	0.5	V
V _{BE} (on)	Base Emitter On Voltage	$V_{CE}=1V$, $I_{C}=2A$		0.86	1.5	V
f _T	Current Gain Bandwidth Product	V _{CE} =1V, I _C =0.5A		150		MHz
C _{ob}	Output Capacitance	V _{CB} =10V, I _E =0, f=1MHz		27		pF

h_{FE} Classification

Classification	L	M	N	Р
h _{FE}	140 ~ 240	200 ~ 330	300 ~ 450	420 ~ 600

Typical Characteristics




Figure 1. Static Characteristic




Figure 3. Collector-Emitter Saturation Voltage




Figure 5. Safe Operating Area




Figure 2. DC current Gain




Figure 4. Base-Emitter On Voltage






Figure 6. Power Derating


©2001 Fairchild Semiconductor Corporation Rev. A1, June 2001

Package Demensions

TO-92

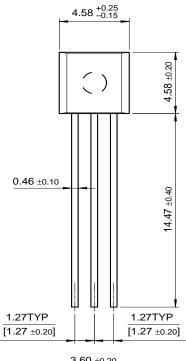





TRADEMARKS

The following are registered and unregistered trademarks Fairchild Semiconductor owns or is authorized to use and is not intended to be an exhaustive list of all such trademarks.

ACEx™	FAST [®]	OPTOPLANAR™	STAR*POWER™
Bottomless™	FASTr™	PACMAN™	Stealth™
CoolFET™	FRFET™	POP™	SuperSOT™-3
CROSSVOLT™	GlobalOptoisolator™	Power247™	SuperSOT™-6
DenseTrench™	GTO™	PowerTrench [®]	SuperSOT™-8
DOME™	HiSeC™	QFET™	SyncFET™
EcoSPARK™	ISOPLANAR™	QS™	TruTranslation™
E ² CMOS™	LittleFET™	QT Optoelectronics™	TinyLogic™
EnSigna™	MicroFET™	Quiet Series™	UHC™
FACT™	MICROWIRE™	SLIENT SWITCHER®	UltraFET [®]
FACT Quiet Series™	OPTOLOGIC™	SMART START™	VCX™

STAR*POWER is used under license

DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

As used herein:

- 1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.
- 2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

PRODUCT STATUS DEFINITIONS

Definition of Terms

Datasheet Identification	Product Status	Definition
Advance Information	Formative or In Design	This datasheet contains the design specifications for product development. Specifications may change in any manner without notice.
Preliminary	First Production	This datasheet contains preliminary data, and supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.
No Identification Needed	Full Production	This datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.
Obsolete	Not In Production	This datasheet contains specifications on a product that has been discontinued by Fairchild semiconductor. The datasheet is printed for reference information only.

©2001 Fairchild Semiconductor Corporation Rev. I