


Silicon Piezoresistive Absolute Pressure Sensor

KPY 62-AG
...KPY 65-AG

- Low pressure and temperature hysteresis
- Fast response
- High sensitivity and linearity
- Fatigue free monocrystalline silicon diaphragm giving high load cycle stability
- High long term stability
- Built in silicon temperature sensor
- Metal housing

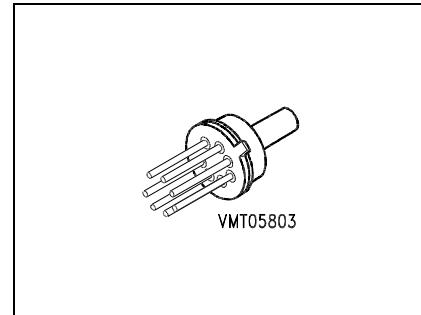


Type and Marking	Symbol	Pressure Range	Unit	Ordering Code
KPY 62 AG	$P_0 \dots P_N$	0 ... 0.6	bar	Q62705-K... *)
KPY 63 AG		0 ... 1.6		Q62705-K... *)
KPY 64 AG		0 ... 4		Q62705-K... *)
KPY 65 AG		0 ... 10		Q62705-K283

*) delivery on request

Pin Configuration

1	Temp.- Sensor (typ. $R_{25} = 2 \text{ k}\Omega$)
2	Not connected
3	$+ V_{in}$; Temp.- Sensor
4	$- V_{out}$
5	No pin
6	Shielding, to be connected to $+ V_{in}$
7	$- V_{in}$
8	$+ V_{out}$

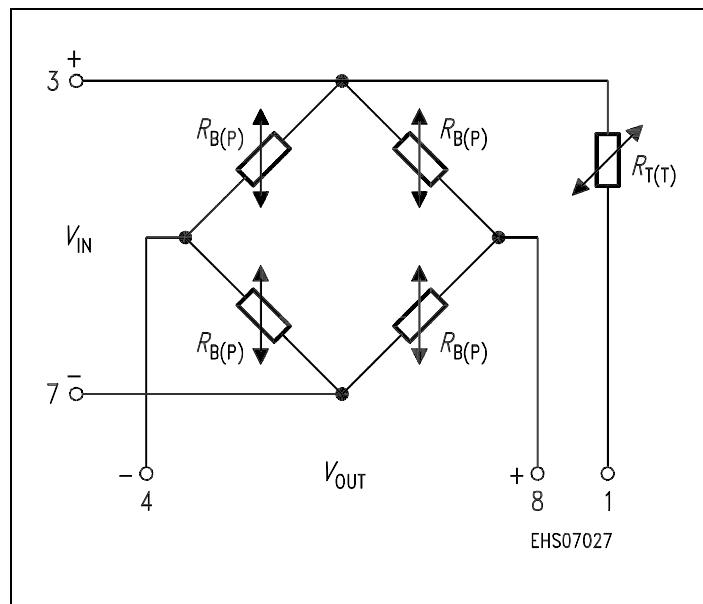

Maximum Ratings


Parameter	Symbol	Value	Unit
Pressure overload KPY 62 AG KPY 63 AG KPY 64 AG KPY 65 AG	P_{MAX}	4	bar
		8	
		12	
		20	
Operating temperature range	T_A	– 40 ... + 125	°C
Storage temperature range	T_{stg}	– 40 ... + 125	°C
Supply voltage	V_{IN}	12	V

Electrical Characteristicsat $T_A = 25$ °C and $V_{IN} = 5$ V unless otherwise specified.

Parameter	Symbol	Value			Unit
		min.	typ.	max.	
Bridge resistance	R_B	4	–	8	kΩ
Sensitivity KPY 62 AG KPY 63 AG KPY 64 AG KPY 65 AG	s	23.3	43.0	73.3	mV/Vbar
		11.3	20.0	30.0	
		6.5	11.0	15.5	
		3.6	5.2	8.0	
Output voltage KPY 62 AG KPY 63 AG KPY 64 AG KPY 65 AG	V_{fin}	70	130	220	mV
		90	160	240	
		130	220	310	
		180	260	400	
Offset voltage $P = P_0$	V_0	– 25	–	+ 25	mV
Linearity error (Best fit straight line) $P = P_0 \dots P_N$ KPY 62 ... 65 AG	F_L	–	± 0.2	± 0.5	% V_{fin}
Pressure hysteresis $P_1 = P_0, P_2 = P_N, P_3 = P_0$ KPY 62 ... 65 AG	P_H	–	± 0.1	–	% V_{fin}

Electrical Characteristicsat $T_1 = 25^\circ\text{C}$, $T_2 = 125^\circ\text{C}$, $T_3 = 25^\circ\text{C}$ and $V_{\text{IN}} = 5\text{ V}$, unless otherwise specified.

Parameter	Symbol	Value			Unit
		min.	typ.	max.	
Temperature coefficient of V_{fin} KPY 62 ... 65 AG	$TC_{V_{\text{fin}}}$	- 0.22	- 0.18	- 0.15	%/K
Temperature coefficient of V_0 KPY 62 ... 63 AG KPY 64 ... 65 AG	TC_{V_0}	- 0.04 - 0.02	-	+ 0.04 + 0.02	%/K
Temperature coefficient of R_B KPY 62 ... 65 AG	TC_{RB}	-	+ 0.23	-	%/K
Temperature hysteresis of V_0 ; V_{fin} KPY 62 ... 65 AG	TH	-	± 0.2	-	% v. V_{fin}

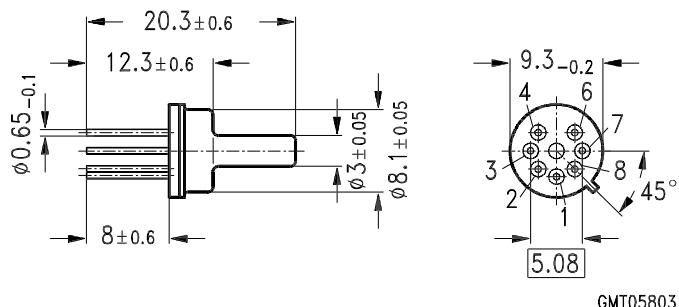Package Outline**Metal Housing, TO-39**

Weight approx. 2.0 g

Dimensions in mm

Sorts of Packing

Package outlines for tubes, trays etc. are contained in our Data Book "Package Information".