


6.0 AMPPERE-KBPC6 OUTLINE

Type	Maximum Peak Reverse Voltage	Maximum Average Rectified Current @ Half-Wave Resistive Load 60Hz		Maximum Forward Peak Surge Current @ 8.3ms Superimposed	Maximum Reverse Current @ PRV @ 25°C T _A	Maximum Forward Voltage @ 25°C T _A	
	PRV	I _O @ T _A		I _{FM} (Surge)	I _R	I _{FM}	V _{FM}
	V _{PK}	A _{AV}	°C	A _{PK}	μADC	A _{PK}	V _{PK}
KBPC6005	50	6	50	125	10	3.0	1.2
KBPC601	100	6	50	125	10	3.0	1.2
KBPC602	200	6	50	125	10	3.0	1.2
KBPC604	400	6	50	125	10	3.0	1.2
KBPC606	600	6	50	125	10	3.0	1.2
KBPC608	800	6	50	125	10	3.0	1.2
KBPC610	1000	6	50	125	10	3.0	1.

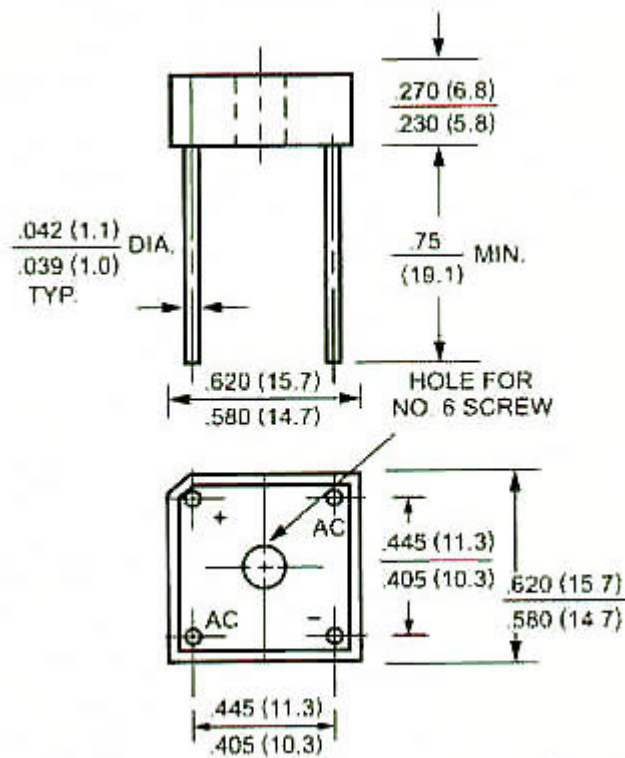

BR-6