


6.0 AMPPERE-KBU6 OUTLINE

Type	Maximum Peak Reverse Voltage	Maximum Average Rectified Current @Half-Wave Resistive Load 60Hz		Maximum Forward Peak Surge Current @8.3ms Superimposed	Maximum Reverse Current @PRV @25 °T _A	Maximum Forward Voltage @25 °T _A	
	PRV	I _O @ T _A		I _{FM} (Surge)	I _R	I _{FM}	V _{FM}
	V _{PK}	A _{AV}		A _{PK}	μADC	A _{PK}	V _{PK}
KBU6005	50	6	50	125	10	6.0	1.2
KBU601	100	6	50	125	10	6.0	1.2
KBU602	200	6	50	125	10	6.0	1.2
KBU604	400	6	50	125	10	6.0	1.2
KBU606	600	6	50	125	10	6.0	1.2
KBU608	800	6	50	125	10	6.0	1.2
KBU610	1000	6	50	125	10	6.0	1.2

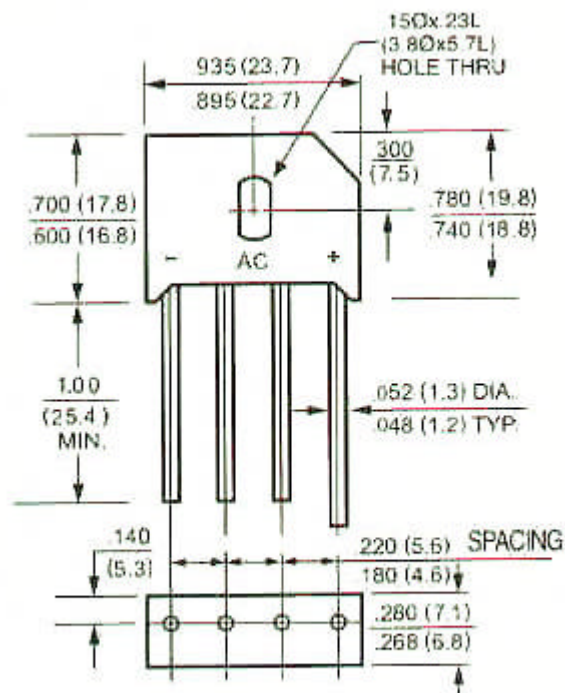

KBU