




Micro Commercial Components
21201 Itasca Street Chatsworth
CA 91311
Phone: (818) 701-4933
Fax: (818) 701-4939

KTC3202

Features

- General Purpose Application
- Switching Application
- Excellent h_{FE} Linearity: $h_{FE}(2)=25(\text{Min.})$ at $V_{CE}=6V$, $I_C=400\text{mA}$
- Complementary to KTA1270

Pin Configuration
Bottom View



Epitaxial Planar NPN Transistor

Maximum Ratings

Symbol	Rating	Rating	Unit
V_{CEO}	Collector-Emitter Voltage	30	V
V_{CBO}	Collector-Base Voltage	35	V
V_{EBO}	Emitter-Base Voltage	5.0	V
I_C	Collector Current	500	mA
I_E	Base Current	500	mA
P_C	Collector Power Dissipation	625	mW
T_J	Operating Junction Temperature	-55 to +150	$^{\circ}\text{C}$
T_{STG}	Storage Temperature	-55 to +150	$^{\circ}\text{C}$

Electrical Characteristics @ 25 $^{\circ}\text{C}$ Unless Otherwise Specified

Symbol	Parameter	Min	Typ	Max	Units
--------	-----------	-----	-----	-----	-------

OFF CHARACTERISTICS

I_{CBO}	Collector Cutoff Current ($V_{CB}=35\text{Vdc}$, $I_E=0$)	---	---	0.1	μAdc
I_{EBO}	Emitter Cutoff Current ($V_{EB}=5.0\text{Vdc}$, $I_C=0$)	---	---	0.1	μAdc


ON CHARACTERISTICS

h_{FE-1}	DC Current gain ⁽¹⁾ ($I_C=100\text{mA}$, $V_{CE}=1.0\text{Vdc}$)	70	---	400	---
h_{FE-2}	DC Current gain ⁽²⁾ ($I_C=400\text{mA}$, $V_{CE}=6.0\text{Vdc}$)	25	---	---	---
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage ($I_C=100\text{mA}$, $I_B=10\text{mA}$)	---	0.1	0.25	Vdc
V_{BE}	Base- Emitter Voltage ($V_{CE}=1.0\text{Vdc}$, $I_C=100\text{mA}$)	---	0.8	1.0	Vdc
f_T	Transistor Frequency ($V_{CE}=6.0\text{Vdc}$, $I_C=20\text{mA}$)	---	300	---	MHz
C_{ob}	Collector Output Capacitance ($V_{CB}=6.0\text{Vdc}$, $I_E=0$, $f=1.0\text{MHz}$)	---	7.0	---	pF

(1) $h_{FE}(1)$ Classification O: 70~140, Y: 120~240, GR: 200~400

$h_{FE}(2)$ Classification O: 25Min., Y: 40Min.

TO-92

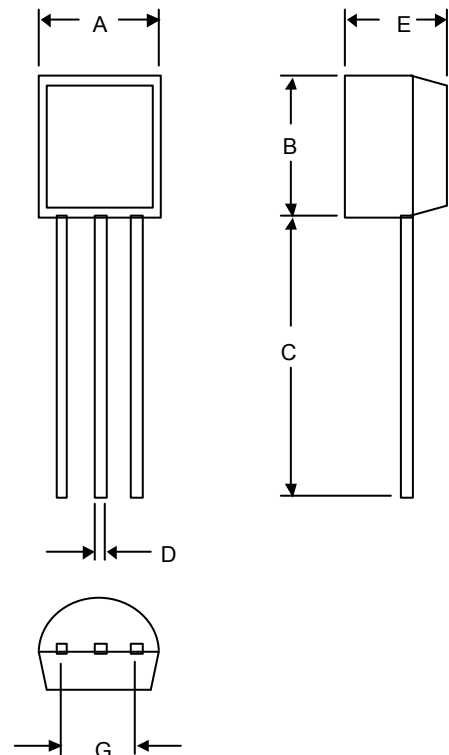

DIMENSIONS					
DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	.175	.185	4.45	4.70	
B	.175	.185	4.46	4.70	
C	.500	---	12.7	---	
D	.016	.020	0.41	0.63	
E	.135	.145	3.43	3.68	
G	.095	.105	2.42	2.67	

KTC3202

