



SAW Components

Data Sheet K 9663 D

Data Sheet

A large, stylized, 3D-rendered graphic of the EPCOS logo. The letters "EPCOS" are in a bold, sans-serif font, appearing to be part of a larger, curved structure that resembles a stylized globe or a series of overlapping planes. The graphic is rendered in shades of gray and white, giving it a metallic or high-tech appearance.



SAW Components

K 9663 D

IF Filter for Audio Applications

38,90 MHz

Data Sheet


Standard

- B/G
- D/K
- I
- L

Duroplast package **SIP5D**

Features

- TV IF audio filter with two channels
- Channel 1 (D/K, I, L) with one pass band for sound carriers between 32,35 MHz and 33,05 MHz
- Channel 2 (B/G) with one pass band for sound carriers at 33,40 MHz and 33,05 MHz
- Standard IC package

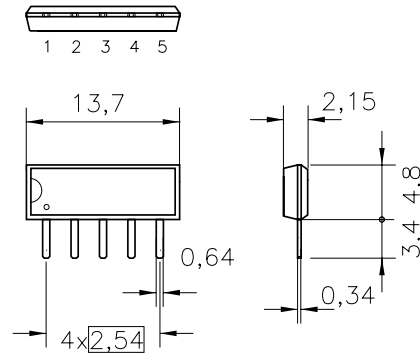


Terminals

- Tinned CuFe alloy

Dimensions in mm, approx. weight 0,5 g

Pin configuration

- 1 Input
- 2 Switching Input
- 3 Chip carrier - ground
- 4 Output
- 5 Output



Type	Ordering code	Marking and package according to	Packing according to
K 9663 D	B39389-K9663-D100	C61157-A1-A18	F61074-V8049-Z000

Maximum ratings

Operable temperature range	T_A	-25/+65	°C	
Storage temperature range	T_{stg}	-40/+85	°C	
DC voltage	V_{DC}	5	V	between any terminals
AC voltage	V_{pp}	10	V	between any terminals



SAW Components

K 9663 D

IF Filter for Audio Applications

38,90 MHz

Data Sheet

Characteristics of channel 1 (switching pin 2 connected to ground)

Reference temperature: $T_A = 25\text{ °C}$
Terminating source impedance: $Z_S = 50\text{ }\Omega$
Terminating load impedance: $Z_L = 2\text{ k}\Omega \parallel 3\text{ pF}$

		min.	typ.	max.	
Insertion attenuation α					
Reference level for the following data	32,35 MHz	10,9	12,4	13,9	dB
Relative attenuation α_{rel}					
Sound carrier	32,40 MHz	—	0,0	—	dB
	32,90 MHz	—	-0,2	—	dB
	31,95 MHz	0,1	1,1	2,1	dB
	33,05 MHz	-1,3	-0,3	0,7	dB
	33,30 MHz	-0,8	0,2	1,2	dB
Picture carrier	38,90 MHz	40,0	46,0	—	dB
Color carrier	34,47 MHz	26,0	32,0	—	dB
Adjacent picture carrier	30,90 MHz	32,0	39,0	—	dB
Adjacent sound carrier	40,35 MHz	43,0	52,0	—	dB
	40,90 MHz	46,0	58,0	—	dB
	41,05 MHz	46,0	58,0	—	dB
Lower sidelobe	25,00 ... 30,90 MHz	32,0	38,0	—	dB
Upper sidelobe	38,90 ... 45,00 MHz	38,0	46,0	—	dB
Impedance at 32,35 MHz					
Input: $Z_{IN} = R_{IN} \parallel C_{IN}$		—	0,6 \parallel 17,9	—	k Ω \parallel pF
Output: $Z_{OUT} = R_{OUT} \parallel C_{OUT}$		—	2,2 \parallel 5,2	—	k Ω \parallel pF
Temperature coefficient of frequency TC_f		—	-72	—	ppm/K



SAW Components

K 9663 D

IF Filter for Audio Applications

38,90 MHz

Data Sheet

Characteristics of channel 2 (switching pin 2 connected to pin 1)

Reference temperature: $T_A = 25\text{ °C}$
Terminating source impedance: $Z_S = 50\text{ }\Omega$
Terminating load impedance: $Z_L = 2\text{ k}\Omega \parallel 3\text{ pF}$

		min.	typ.	max.	
Insertion attenuation α					
Reference level for the following data	33,05 MHz	10,8	12,3	13,8	dB
Relative attenuation α_{rel}					
Sound carrier	33,40 MHz	0,1	1,1	2,1	dB
Picture carrier	38,90 MHz	44,0	54,0	—	dB
Color carrier	34,47 MHz	32,0	42,0	—	dB
Adjacent picture carrier	30,90 MHz	40,0	48,0	—	dB
	31,90 MHz	26,0	30,0	—	dB
Adjacent sound carrier	40,40 MHz	42,0	52,0	—	dB
	41,40 MHz	42,0	60,0	—	dB
Lower sidelobe	25,00 ... 30,90 MHz	38,0	46,0	—	dB
Upper sidelobe	38,90 ... 45,00 MHz	40,0	50,0	—	dB
Impedance at 33,05 MHz					
Input: $Z_{IN} = R_{IN} \parallel C_{IN}$		—	0,5 \parallel 22,2	—	k Ω \parallel pF
Output: $Z_{OUT} = R_{OUT} \parallel C_{OUT}$		—	2,2 \parallel 4,6	—	k Ω \parallel pF
Temperature coefficient of frequency TC_f					
		—	-72	—	ppm/K



SAW Components



K 9663 D

IF Filter for Audio Applications

38,90 MHz

Data Sheet

Frequency response of channel 1

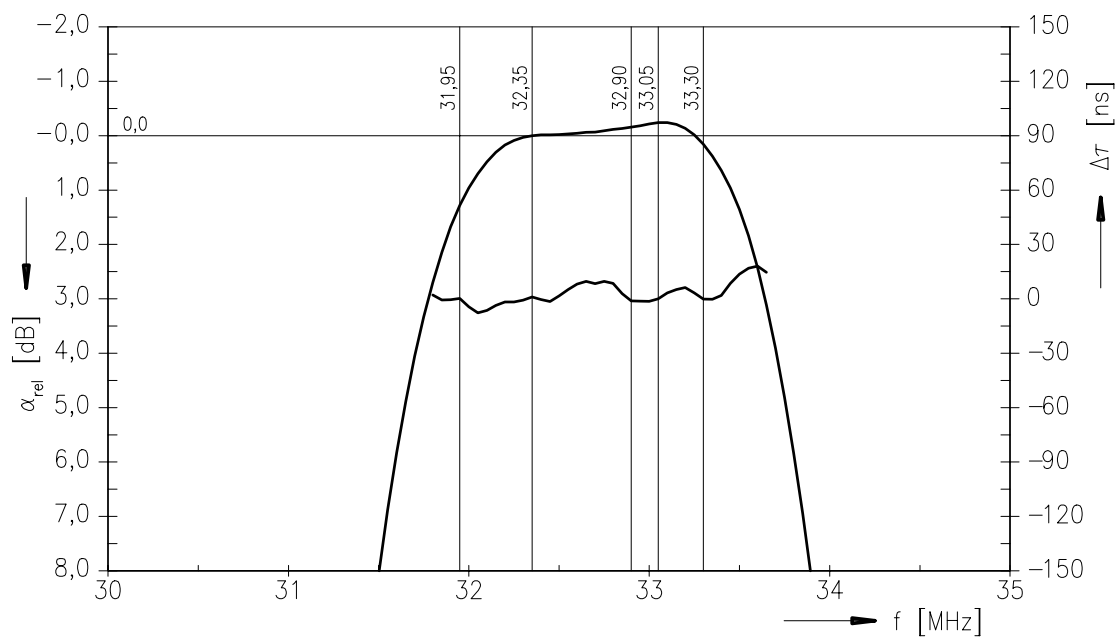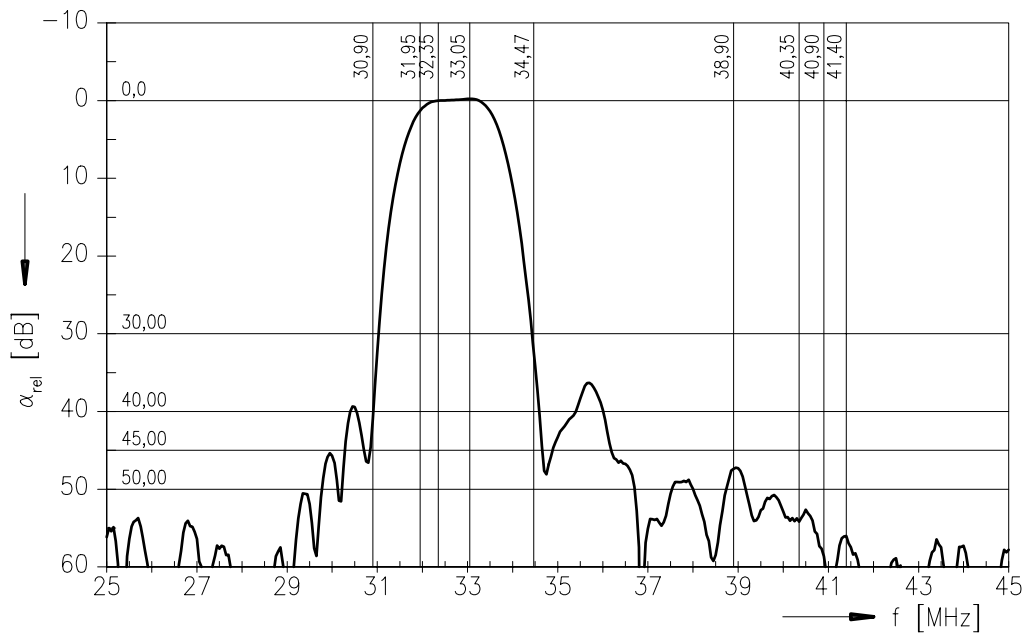



SAW Components



K 9663 D

IF Filter for Audio Applications

38,90 MHz

Data Sheet

Frequency response of channel 2

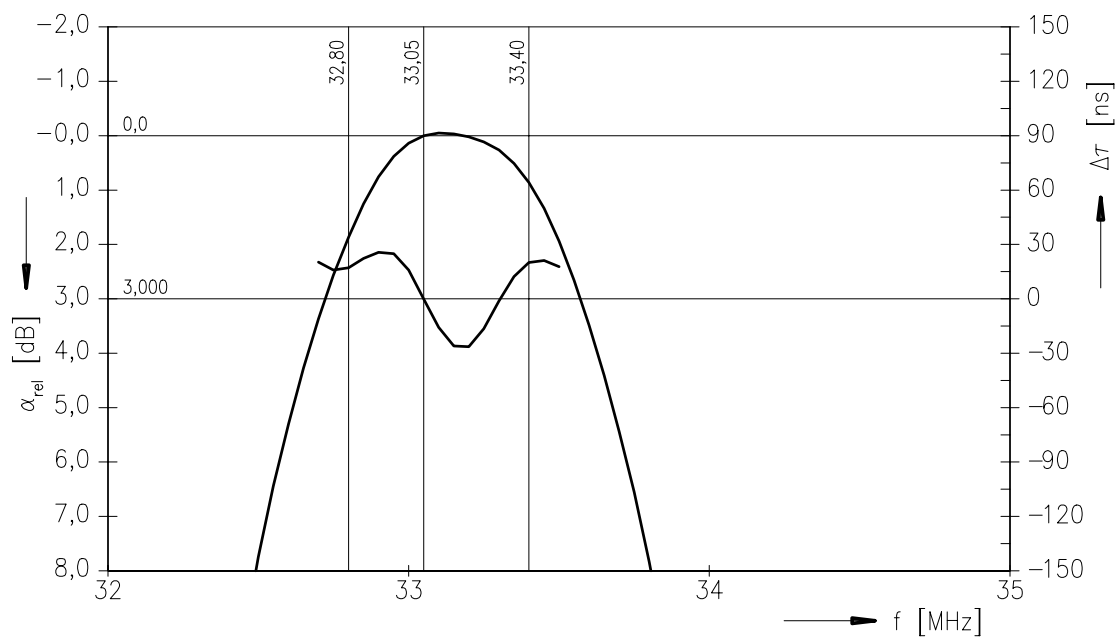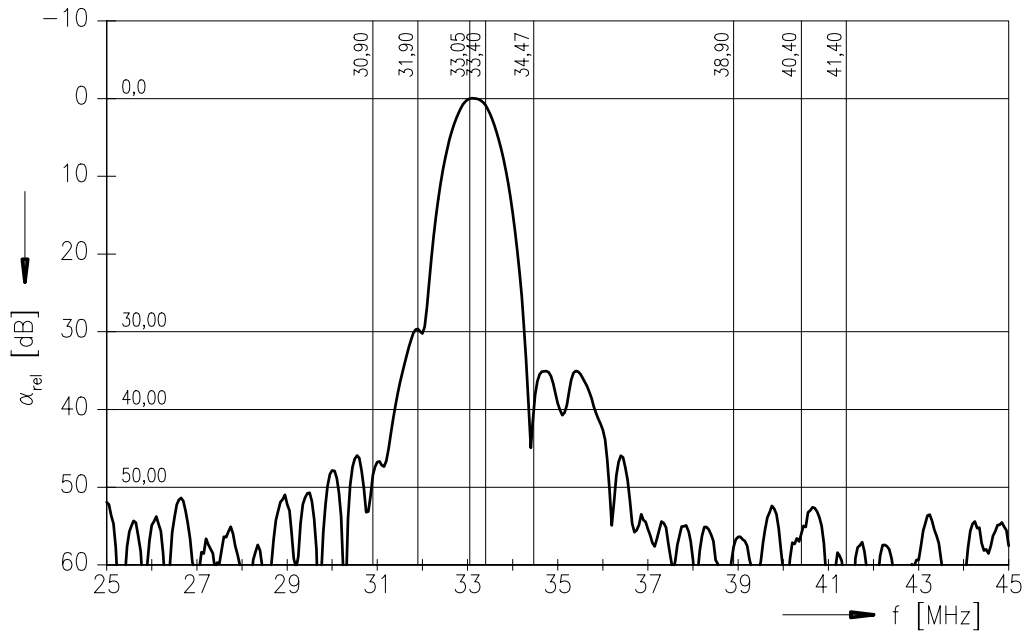



SAW Components	K 9663 D
IF Filter for Audio Applications	38,90 MHz

Data Sheet

Published by EPCOS AG
Surface Acoustic Wave Components Division, SAW CE MM PD
P.O. Box 80 17 09, D-81617 München

© EPCOS AG 2001. All Rights Reserved.

As far as patents or other rights of third parties are concerned, liability is only assumed for components per se, not for applications, processes and circuits implemented within components or assemblies.

The information describes the type of component and shall not be considered as assured characteristics.

Terms of delivery and rights to change design reserved.

For questions on technology, prices and delivery please contact the sales offices of EPCOS AG or the international representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our sales offices.