



NO. : QB/SPS 73 PS 1077A

# SPECIFICATIONS

**NAME: 0.39 inch DIGITAL DISPLAY**

**TYPE: LDS40391YA-2W**

**SHENZHEN DITELONG INDUSTRIAL CO.,LTD.  
SHENZHEN CANDELA ELECTRONIC CO.,LTD.  
SHENZHEN SUCCESS PHOTOELECTRONICS CO.,LTD**

**SHENZHEN OFFICE**

Add: Room 1911,Zhongwin Science & Techn.Bldg,Bagua 3th Rd.Bagualing Industry Zone Shenzhen,China

Tel: 86-755-25884151

Fax: 86-755-25884659

Post Code: 518029

E-mail: ditelong@asiansources.com

Http://www.asia\_globalsources.com/ditelong.co

Http://www.ditelong.com

**SHENZHEN FACTORY**

Add:4/F Ranbao Bldg,NO. 189 Industrial Zone,Henggang,ShenZhen,china

Tel:86-755-28630148 28630040

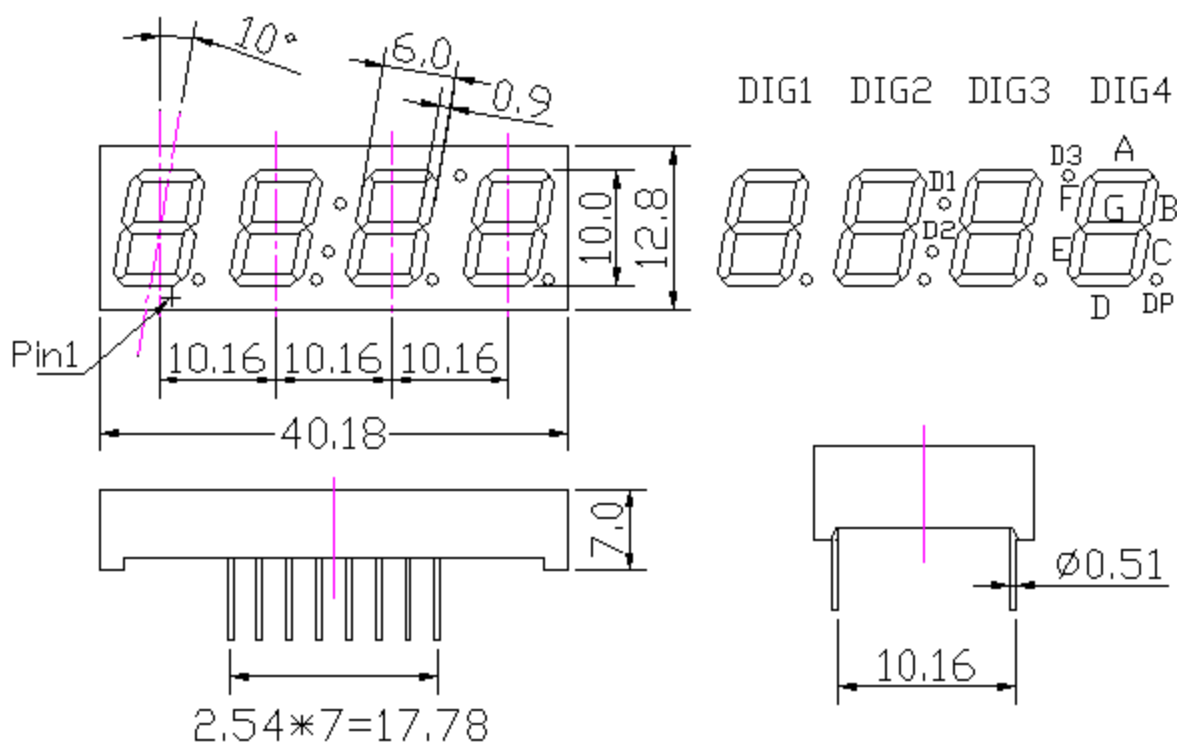
Fax:86-755-28631216

Post Code:518115

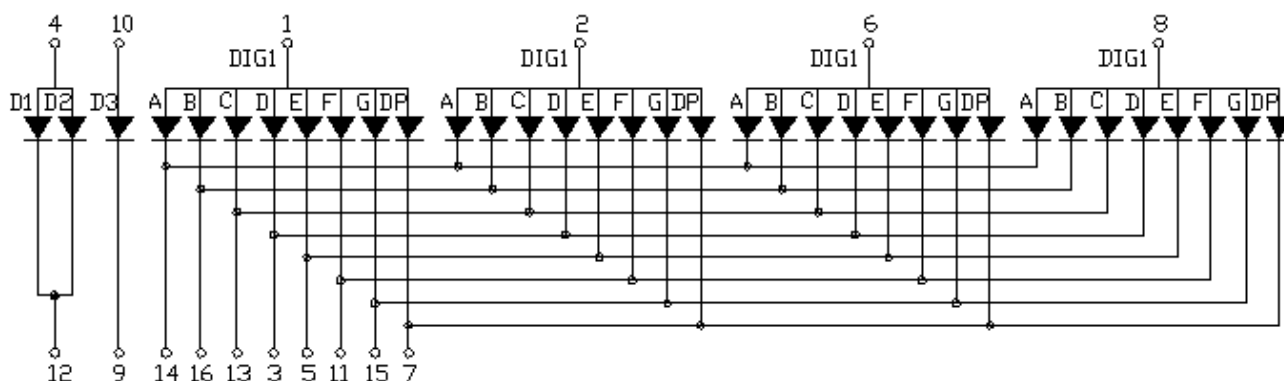
## LDS—40391YA

**1. FEATURES**

- High intensity and reliability.
- Low power requirement
- I.C. compatible
- Grey Color Face

**2. PACKAGE DIMENSIONS:****NOTES:**

All dimensions are in millimeters, tolerance are  $\pm 0.25$  mm unless otherwise noted.

**3. INTERNAL CIRCUIT DIAGRAM.**

**4. ABSOLUTE MAXIMUM RATINGS Ta=25°C**

| PARAMETER                                                               | Yellow | Green | UNIT |
|-------------------------------------------------------------------------|--------|-------|------|
| Power dissipation per segment                                           | 60     |       | mw   |
| Peak forward current per segment*                                       | 80     |       | mA   |
| Continuous forward current per segment**                                | 20     |       | mA   |
| Reverse voltage per segment                                             | 5      |       | V    |
| Operating temperature range                                             | -35~80 |       | °C   |
| Storage temperature range                                               | -35~85 |       | °C   |
| Solder temperature 1/16 inch below seating plane for 3 seconds at 260°C |        |       |      |

**NOTES:**

\* 1/10 duty cycle 10 mes pulse width

\*\* We advise average forward c urrent is 15mA

**5. ELECTRICAL/OPTICAL CHARACTERISTICS Ta=25°C**

| ITEM                        | SYMBOL           | CONDITION | RATING  |     |     | UNIT    |
|-----------------------------|------------------|-----------|---------|-----|-----|---------|
|                             |                  |           | min     | typ | max |         |
| Luminous Intensity          | IV               | Yellow    | IF=20mA | —   | 9   | mcd     |
|                             |                  | Green     |         | —   | —   |         |
| Peak Emission Wavelength    | $\lambda P$      | Yellow    | IF=20mA | —   | 595 | nm      |
|                             |                  | Green     |         | —   | —   |         |
| Spectral Line Half-width    | $\Delta \lambda$ | Yellow    | IF=20mA | —   | 30  | nm      |
|                             |                  | Green     |         | —   | —   |         |
| Forward Voltage per segment | VF               | Yellow    | IF=20mA | —   | 2.2 | V       |
|                             |                  | Green     |         | —   | —   |         |
| Reverse Current per segment | IR               | Yellow    | VR=5V   | —   | —   | $\mu A$ |
|                             |                  | Green     | VR=5V   | —   | —   |         |

**6. CAUTIONS:**

- When being used, do not be over the corresponding limited scale and note in our specification.
- For some products with the static electricity mark, please operate refer to the rules of static electricity fence.
- When designing, please consider the factor of heat, and taking keep away measure to avoid high temperature.
- Do not clean the product with organic impregnant as some of them may damage the product.