

25 to 30watts / 3" ´ 2.60" ´ 0.45" Package

YCL


LP series / 4:1 input range

Feature:

- Low Cost
- 4:1 input range
- High efficiency
- Industry-standard package and pinout
- 500Vdc Input/Output Isolation
- On/Off control and Vout trim
- No External Components required

Specifications: At 25°C

Input Specifications:	General Specifications:
Input Voltage Range: See Table	Isolation Voltage: 500Vdc
Input Filter: Pi-type	Efficiency: see table
On/Off Control: TTL high(or open)=on TTL low=off	Switching Frequency: 100KHz typical
	Isolation Resistance: 1000M ohm
Output Specifications:	Environmental Specifications:
Output Voltage & Current: see table	Operating Temperature: -25 to + 71°C
Voltage Accuracy: $\pm 2\%$ max	Storage Temperature: -40 to +105°C
Line Regulation(at full load): $\pm 0.5\%$ max	Cooling: Free air convection
Load Regulation (at full load to 1/4 load): Single output: $\pm 1\%$ max Dual output: $\pm 2.5\%$ max	Derating: See Derating Curve
	Humidity Non-Condensing: 20 to 95% RH
	Physical Specifications:
Temperature Coefficient: $\pm 0.05\%/^{\circ}\text{C}$ max	Case Material: Black coated copper with non-conductive plastic base
Ripple & Noise(20Mhz BW): 1% p-p max	Pin Material: Brass, solder coated
Short Circuit Protection: Power fold back	Weight: 156grams typical
Over load protection: Build-in	

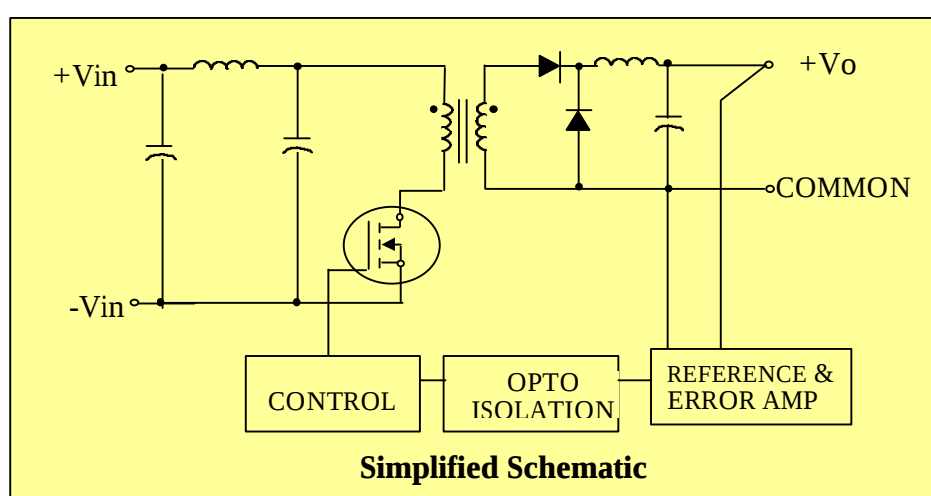

25 to 30watts / 3" ~ 2.60" ~ 0.45" Package

YCL

LP series / 4:1 input range




Model Selection Table:

Model no.	Input			Output		Efficiency Typical① %	Package	External Fuse② (A)
	Voltage (Vdc)	Current(mA)		Voltage (Vdc)	Current (mA)			
		No-Load	Full-Load					
LP501-412S05	9-36	30	2671	5	5000	78	LP	6
LP201-412S12	9-36	30	2500	12	2000	80	LP	6
LP161-412S15	9-36	30	2580	15	1650	80	LP	6
LP251-412D05	9-36	30	2671	±5	±2500	78	LP	6
LP101-412D12	9-36	30	2500	±12	±1000	80	LP	6
LP830-412D15	9-36	30	2594	±15	±830	80	LP	6
LP501-424S05	20-72	26	1302	5	5000	80	LP	3
LP251-424S12	20-72	26	1543	12	2500	81	LP	3
LP201-424S15	20-72	26	1524	15	2000	82	LP	3
LP301-424D05	20-72	26	1563	±5	±3000	80	LP	3
LP121-424D12	20-72	26	1543	±12	±1250	81	LP	3
LP101-424D15	20-72	26	1524	±15	±1000	82	LP	3

①Efficiency is specified at nominal input voltage and full load.

②Certain applications may require the installation of external fuse in front of the input.


Package LP:

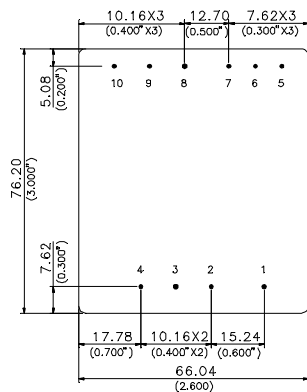

PIN	SINGLE	DUAL	TRIPLE
1	ON/OFF	ON/OFF	ON/OFF
2	+INPUT	+INPUT	+INPUT
3	-INPUT	-INPUT	-INPUT
4	NO PIN	NO PIN	NO PIN
5	NO PIN	+OUTPUT	+OUTPUT
6	OUTPUT TRIM	COMMON	COMMON
7	NO PIN	-OUTPUT	-OUTPUT
8	+OUTPUT	OUTPUT TRIM	+5V out
9	-OUTPUT	NO PIN	NO PIN
10	NO PIN	NO PIN	OUTPUT TRIM

Po(W)

Power Derating Curve

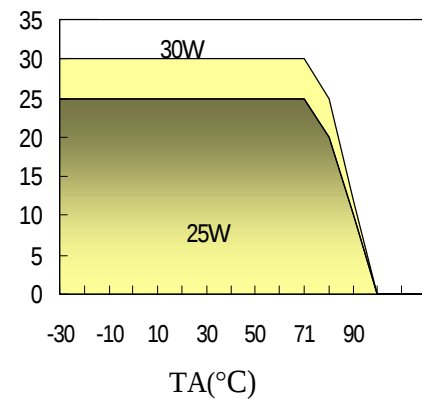

Unit: mm(inch)±0.25(0.010)