

LTM455_U & LTM450_U Series Ceramic Filter

LTM455_U and LTM450_U series ceramic filters are widely used in telecommunication, cable, radar, TV set, tape recorder, video camera and other electronic products due to its lower price and stable performances.

LTM455_U
LTM450_U

Specifications:

Frequency Range(fc):

LTM455_U Series: 455KHz

LTM450_U Series: 450KHz

Operating Temperature: -20°C ~ +80°C Standard

Storage Temperature: -40°C ~ +85°C

6dB Bandwidth and Attenuation Bandwidth:

B:	± 15KHz	± 30KHz
C:	± 12.5KHz	± 24KHz
D:	± 10KHz	± 20KHz
E:	± 7.5KHz	± 15KHz
F:	± 6KHz	± 12.5KHz
G:	± 4.5KHz	± 10 KHz
H:	± 3KHz	± 9KHz
I:	± 2KHz	± 7.5KHz


Attenuation Specified: 40dB min

Stop Band Attenuation: 27dB min (B,C,D,E,F)
at $f_c \pm 100\text{KHz}$ 25dB min (G,H,I)

Insertion Loss: 4.0dB max (B,C,D)
6.0dB max (E,F,G,H,I)

Input/Output Impedance: 1.5K Ω (B,C,D,E)
2.0K Ω (F,G,H,I)

LTM_U Series

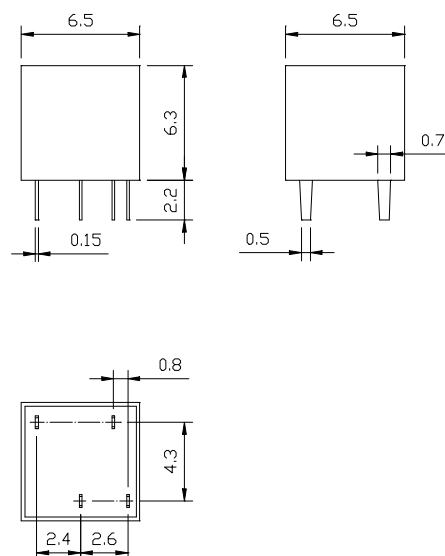

All dimensions are in mm

Note:

1. Other frequencies, bandwidth ranges available. Consult VTC Support for specific requirements.
2. Not all combinations of the above bandwidth ranges are available. Consult VTC Support if your requirement is not standard.
3. All specifications subject to change without notice.

Ordering Information

Product name + Frequency + Bandwidth Code.

i.e. LTM455BU