



	<b>LBA126</b>	<b>Units</b>
Load Voltage	250	V
Load Current	170	mA
Max R <sub>ON</sub>	15	Ω

### Description

LBA126 is 250V, 170mA, 15Ω independent 1-Form-A and 1-Form-B relays. It features lower on-resistance with enhanced peak load current handling capabilities.

### Features

- Small 8 Pin DIP Package
- Low Drive Power Requirements (TTL/CMOS Compatible)
- No Moving Parts
- High Reliability
- Arc-Free With No Snubbing Circuits
- 3750V<sub>RMS</sub> Input/Output Isolation
- FCC Compatible
- VDE Compatible
- No EMI/RFI Generation
- Machine Insertable, Wave Solderable
- Surface Mount and Tape & Reel Versions Available

### Approvals

- UL Recognized: File Number E76270
- CSA Certified: File Number LR 43639-10
- BSI Certified to:
  - BS EN 60950:1992 (BS7002:1992)  
Certificate #: 7344
  - BS EN 41003:1993  
Certificate #: 7344

### Applications

- Telecommunications
  - Telecom Switching
  - Tip/Ring Circuits
  - Modem Switching (Laptop, Notebook, Pocket Size)
  - Hookswitch
  - Dial Pulsing
  - Ground Start
  - Ringer Injection
- Instrumentation
  - Multiplexers
  - Data Acquisition
  - Electronic Switching
  - I/O Subsystems
  - Meters (Watt-Hour, Water, Gas)
- Medical Equipment-Patient/Equipment Isolation
- Security
- Aerospace
- Industrial Controls


### Ordering Information

<b>Part #</b>	<b>Description</b>
LBA126	8 Pin DIP (50/Tube)
LBA126P	8 Pin Flatpack (50/Tube)
LBA126PTR	8 Pin Flatpack (1000/Reel)
LBA126S	8 Pin Surface Mount (50/Tube)
LBA126STR	8 Pin Surface Mount (50/Reel)


### Pin Configuration

**LBA126 Pinout**


AC/DC Configuration

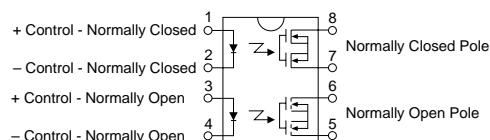

**Switching Characteristics of  
Normally Open (Form A) Devices**

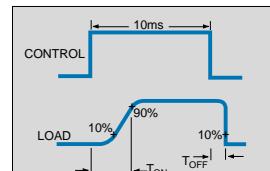

**Switching Characteristics of  
Normally Closed (Form B) Devices**

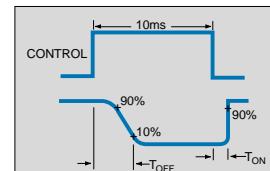

**Absolute Maximum Ratings (@ 25° C)**

Parameter	Min	Typ	Max	Units
Input Power Dissipation	-	-	150 <sup>1</sup>	mW
Input Control Current Peak (10ms)	-	-	50 1	mA A
Reverse Input Voltage	-	-	5	V
Total Power Dissipation	-	-	800 <sup>2</sup>	mW
Isolation Voltage Input to Output	3750	-	-	V <sub>RMS</sub>
Operational Temperature	-40	-	+85	°C
Storage Temperature	-40	-	+125	°C
Soldering Temperature DIP Package	-	-	+260	°C
Flatpack/Surface Mount Package (10 Seconds Max.)	-	-	+220	°C

<sup>1</sup> Derate Linearly 1.33 mw/°C<sup>2</sup> Derate Linearly 6.67 mw/°C













*Absolute Maximum Ratings are stress ratings. Stresses in excess of these ratings can cause permanent damage to the device. Functional operation of the device at these or any other conditions beyond those indicated in the operational sections of this data sheet is not implied. Exposure of the device to the absolute maximum ratings for an extended period may degrade the device and effect its reliability.*

**Electrical Characteristics**

Parameter	Conditions	Symbol	Min	Typ	Max	Units
<b>Output Characteristics @ 25°C</b>						
Load Voltage (Peak)	-	V <sub>ON</sub>	-	-	250	V
Load Current *(Continuous)	-	I <sub>ON</sub>	-	-	170	mA
AC/DC Configuration	-	I <sub>LPK</sub>	-	-	-	mA
Peak Load Current	10ms	I <sub>LPK</sub>	-	-	-	mA
On-Resistance		R <sub>ON</sub>	-	10	15	Ω
AC/DC Configuration	I <sub>L</sub> =170mA	R <sub>ON</sub>	-	-	-	Ω
Off-State Leakage Current	V <sub>L</sub> =250V	I <sub>LEAK</sub>	-	-	1	μA
Switching Speeds						
Turn-On	I <sub>F</sub> =5mA, V <sub>L</sub> =10V	T <sub>ON</sub>	-	-	5	ms
Turn-Off	I <sub>F</sub> =5mA, V <sub>L</sub> =10V	T <sub>OFF</sub>	-	-	5	ms
Output Capacitance	50V; f=1MHz	C <sub>OUT</sub>	-	50	-	pF
Load Current Limiting		I <sub>CL</sub>	-	-	-	mA
Capacitance Input to Output	-	-	-	3	-	pF
<b>Input Characteristics @ 25°C</b>						
Input Control Current	I <sub>L</sub> =170mA	I <sub>F</sub>	5	-	50	mA
Input Dropout Current	-	I <sub>F</sub>	0.4	0.7	-	mA
Input Voltage Drop	I <sub>F</sub> =5mA	V <sub>F</sub>	0.9	1.2	1.4	V
Reverse Input Voltage	-	V <sub>R</sub>	-	-	5	V
Reverse Input Current	V <sub>R</sub> =5V	I <sub>R</sub>	-	-	10	μA
<b>Common Characteristics @ 25°C</b>						
Input to Output Capacitance	-	C <sub>I/O</sub>	-	3	-	pF
Input to Output Isolation	-	V <sub>I/O</sub>	3750	-	-	V <sub>RMS</sub>













\*NOTE: If both poles operate simultaneously load current must be derated so as not to exceed the package power dissipation value.

## PERFORMANCE DATA\*














The Performance data shown in the graphs above is typical of device performance. For guaranteed parameters not indicated in the written specifications, please contact our application department.

## PERFORMANCE DATA\*

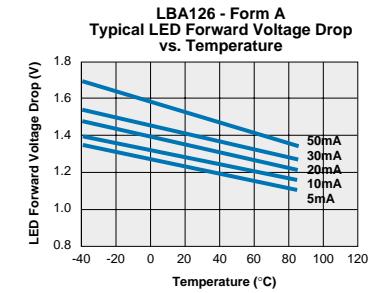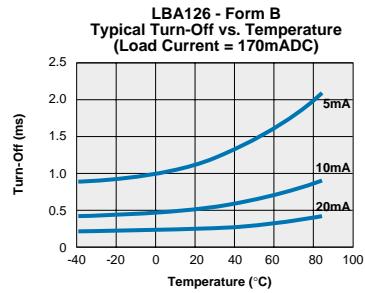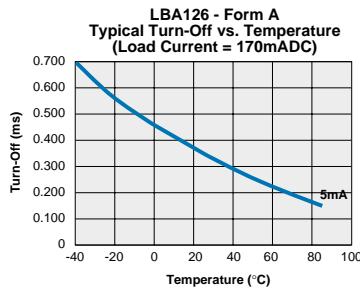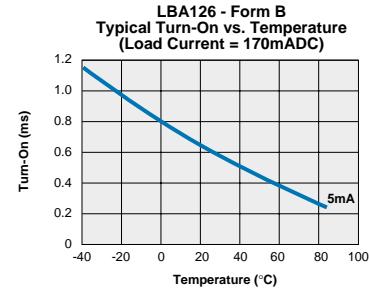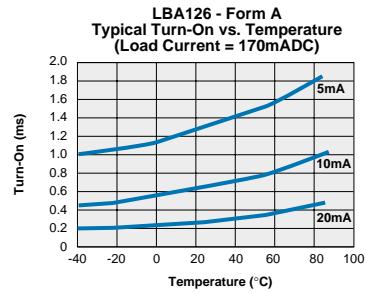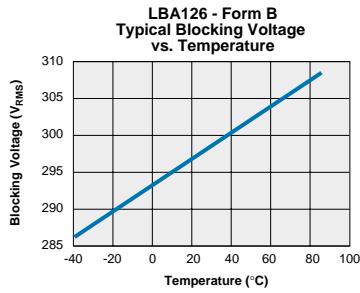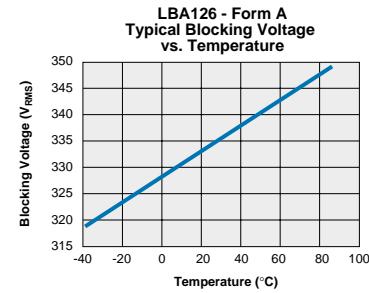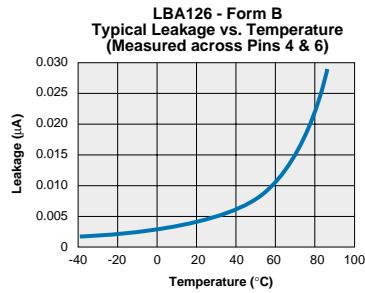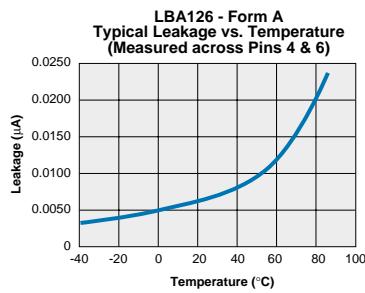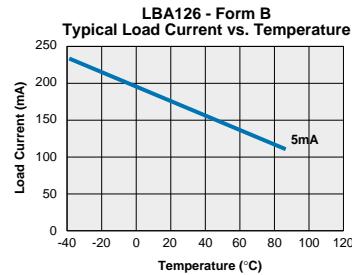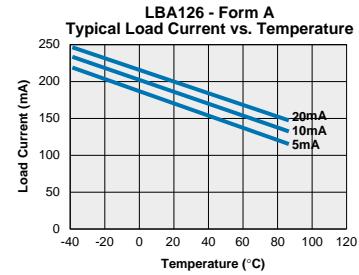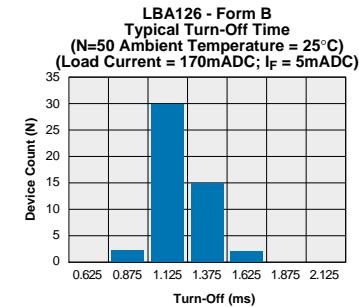



\*The Performance data shown in the graphs above is typical of device performance. For guaranteed parameters not indicated in the written specifications, please contact our application department.

## PERFORMANCE DATA\*

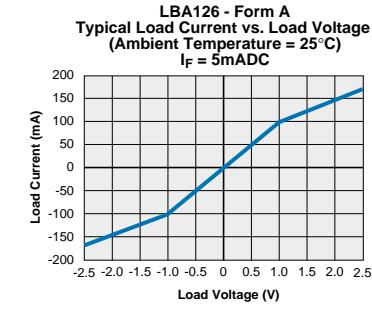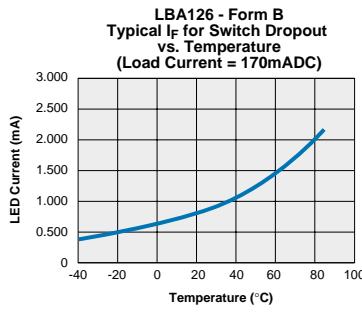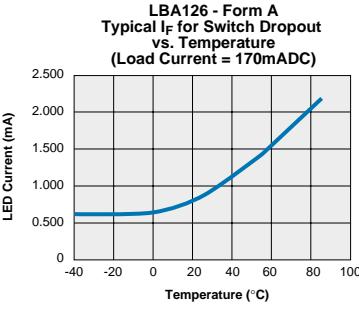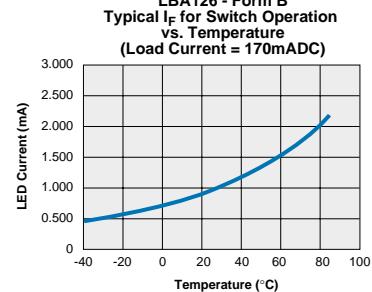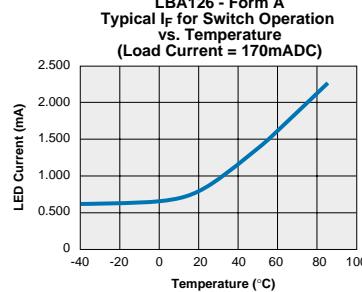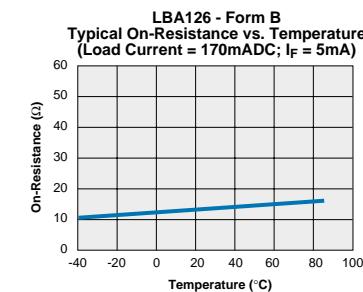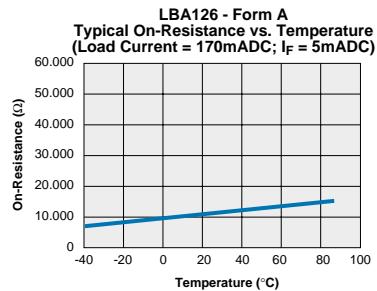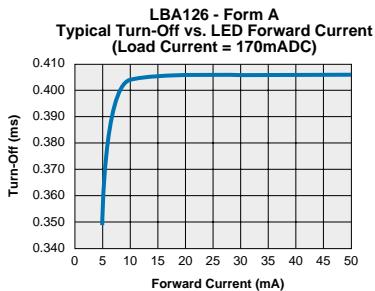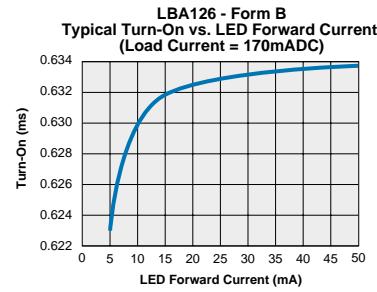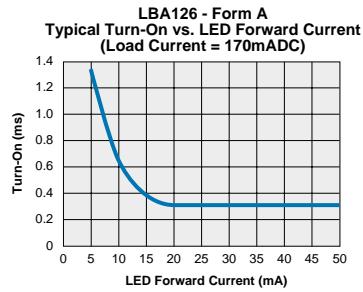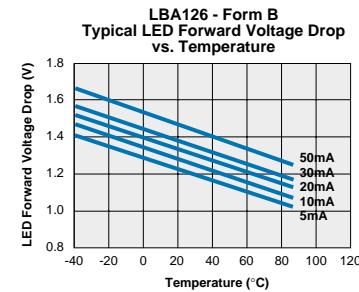

\*The Performance data shown in the graphs above is typical of device performance. For guaranteed parameters not indicated in the written specifications, please contact our application department.

## PERFORMANCE DATA\*

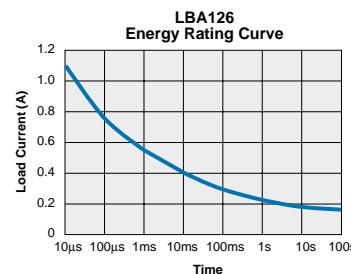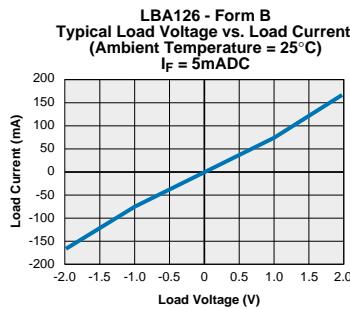





\*The Performance data shown in the graphs above is typical of device performance. For guaranteed parameters not indicated in the written specifications, please contact our application department.



CLARE


LBA126

### Mechanical Dimensions

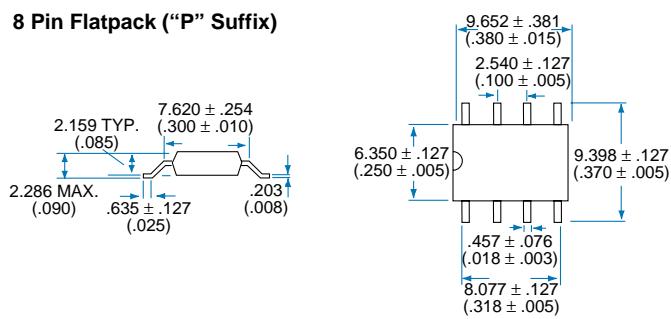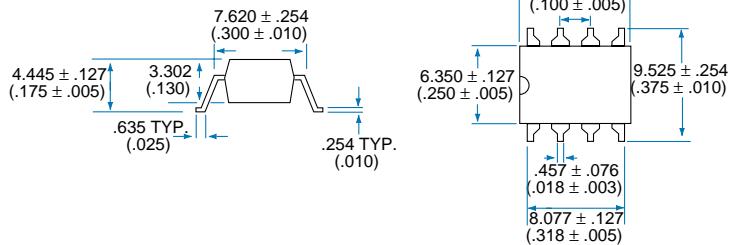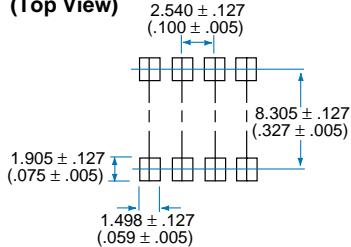
**8 Pin Flatpack ("P" Suffix)****PC Board Pattern (Top View)****8 Pin DIP Surface Mount ("S" Suffix)****PC Board Pattern (Top View)**

## Mechanical Dimensions

Tape and Reel Packaging for 8 Pin Flatpack Package

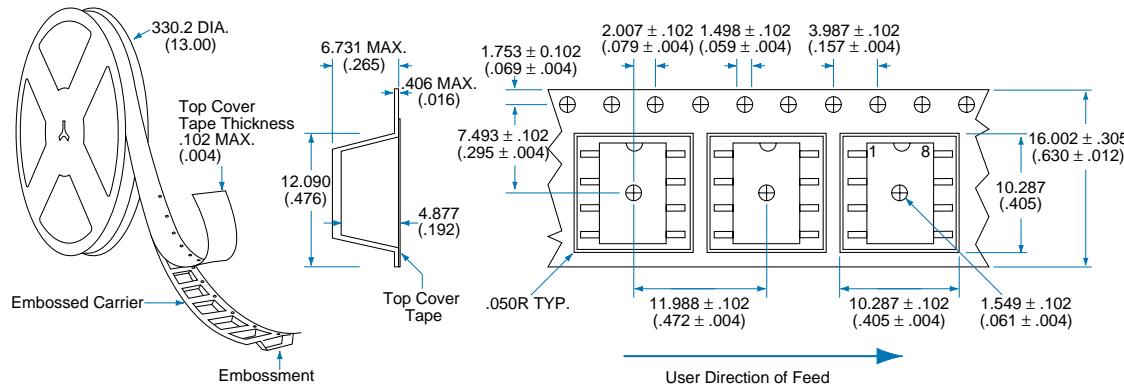

Tape and Reel Packaging for 8 Pin Surface Mount Package

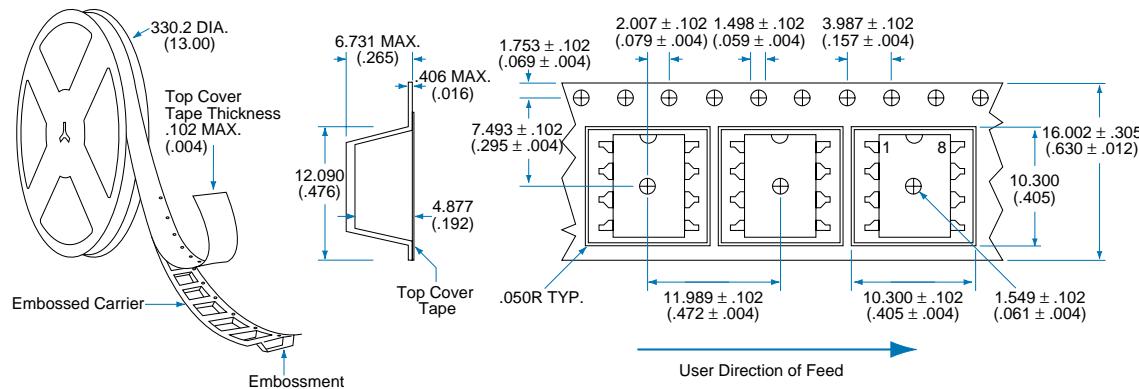

Dimensions  
mm  
(inches)

## CLARE LOCATIONS

Clare Headquarters  
 78 Cherry Hill Drive  
 Beverly, MA 01915  
 Tel: 1-978-524-6700  
 Fax: 1-978-524-4900  
 Toll Free: 1-800-27-CLARE

Clare Micronix Division  
 145 Columbia  
 Aliso Viejo, CA 92656-1490  
 Tel: 1-949-831-4622  
 Fax: 1-949-831-4628

## SALES OFFICES

### AMERICAS

**Americas Headquarters**  
 Clare  
 78 Cherry Hill Drive  
 Beverly, MA 01915  
 Tel: 1-978-524-6700  
 Fax: 1-978-524-4900  
 Toll Free: 1-800-27-CLARE

**Eastern Region**  
 Clare  
 P.O. Box 856  
 Mahwah, NJ 07430  
 Tel: 1-201-236-0101  
 Fax: 1-201-236-8685  
 Toll Free: 1-800-27-CLARE

**Central Region**  
 Clare Canada Ltd.  
 3425 Harvester Road, Suite 202  
 Burlington, Ontario L7N 3N1  
 Tel: 1-905-333-9066  
 Fax: 1-905-333-1824

**Western Region**  
 Clare  
 1852 West 11th Street, #348  
 Tracy, CA 95376  
 Tel: 1-209-832-4367  
 Fax: 1-209-832-4732  
 Toll Free: 1-800-27-CLARE

**Canada**  
 Clare Canada Ltd.  
 3425 Harvester Road, Suite 202  
 Burlington, Ontario L7N 3N1  
 Tel: 1-905-333-9066  
 Fax: 1-905-333-1824

## EUROPE

**European Headquarters**  
 CP Clare nv  
 Bampsalaan 17  
 B-3500 Hasselt (Belgium)  
 Tel: 32-11-300868  
 Fax: 32-11-300890

**France**  
 Clare France Sales  
 Lead Rep  
 99 route de Versailles  
 91160 Champlan  
 France  
 Tel: 33 1 69 79 93 50  
 Fax: 33 1 69 79 93 59

**Germany**  
 Clare Germany Sales  
 ActiveComp Electronic GmbH  
 Mitterstrasse 12  
 85077 Manching  
 Germany  
 Tel: 49 8459 3214 10  
 Fax: 49 8459 3214 29

**Italy**  
 C.L.A.R.E.s.a.s.  
 Via C. Colombo 10/A  
 I-20066 Melzo (Milano)  
 Tel: 39-02-95737160  
 Fax: 39-02-95738829

**Sweden**  
 Clare Sales  
 Comptronic AB  
 Box 167  
 S-16329 Spånga  
 Tel: 46-862-10370  
 Fax: 46-862-10371

**United Kingdom**  
 Clare UK Sales  
 Marco Polo House  
 Cook Way  
 Bindon Road  
 Taunton  
 UK-Somerset TA2 6BG  
 Tel: 44-1-823 352541  
 Fax: 44-1-823 352797

## ASIA/PACIFIC

**Asian Headquarters**  
 Clare  
 Room N1016, Chia-Hsin, Bldg II,  
 10F, No. 96, Sec. 2  
 Chung Shan North Road  
 Taipei, Taiwan R.O.C.  
 Tel: 886-2-2523-6368  
 Fax: 886-2-2523-6369

<http://www.clare.com>

---

*Clare cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in this Clare product. No circuit patent licenses nor indemnity are expressed or implied. Clare reserves the right to change the specification and circuitry, without notice at any time. The products described in this document are not intended for use in medical implantation or other direct life support applications where malfunction may result in direct physical harm, injury or death to a person.*

---