



L-Series

High Reliability Radiation

Tolerant DC/DC Converters

DESCRIPTION

The L-Series of DC/DC converters are radiation tolerant, high reliability devices designed for moderate radiation environments such as those encountered by low earth orbit satellites and launch vehicles. For higher radiation environments, the G-Series of DC/DC converters is recommended. Features include small size, low weight and a high tolerance to total ionizing dose, single event effects and environmental stresses such as temperature extremes, mechanical shock, and vibration. All components are fully derated to meet the requirements of MIL-STD-975, MIL-STD-1547 and GSFC PPL-21 Appendix B. Extensive documentation including Radiation Susceptibility, Thermal Analysis, Stress Analysis and MTBF are available.

The converters incorporate a fixed frequency single forward topology with magnetic feedback and an internal EMI filter that utilizes metallized film capacitors instead of large multilayer ceramic capacitors for improved reliability. These converters are capable of meeting the conducted emissions and conducted susceptibility requirements of MIL-STD-461C without any additional components. All models include an external inhibit port and have an adjustable output voltage. They are enclosed in a hermetic 2.3" x 1.5" x 0.4" steel package and weigh less than 85 grams. The package utilizes rugged ceramic feed-through copper core pins and is sealed using parallel seam welding.

Full environmental screening includes temperature cycling, constant acceleration, fine and gross leak, and burn-in.

Non-flight versions of the L-Series converters are available for system development purposes. Variations in electrical specifications and screening to meet custom requirements can be accommodated.

FEATURES

- # Total Dose > 25K rad(Si)
- # SEE > 37 MeV·cm²/mg
- # Internal EMI filter; Converter capable of meeting MIL-STD-461C CE03 and CS01
- # Low weight, < 85 grams
- # Magnetically coupled feedback
- # 16 to 50V DC input range
- # Up to 25W output power
- # Single and Dual output models include 3.3, 5, 12, 15, ±5, ±12, and ±15V
- # High efficiency - to 82%
- # -55°C to +125°C operating temperature range
- # 100MΩ @ 500VDC isolation
- # Under-voltage lockout
- # Short circuit and overload protection
- # Output over voltage limiter
- # Adjustable output voltage
- # External Inhibit
- # 1,500,000 hour MTBF

APPLICATIONS

- # Low Earth Orbit Satellites (LEO)
- # Launch Vehicles

COMPANY HISTORY

Advanced Analog/Magnitude-3 is part of the International Rectifier Hi-Rel Components and Subsystems group since its acquisition in 2000. Magnitude-3 was founded in 1997 and manufactures thick-film hybrids for radiation-sensitive environments with the principal intent of developing and manufacturing high-reliability and high-performance DC-DC converters for the aerospace industry. Advanced Analog has been making high-value-added power management systems and technology for aerospace, aviation, and other high-reliability applications since 1969. International Rectifier is a world leader in power management devices and systems and has been serving the high-reliability market since the 1950s.

CIRCUIT DESCRIPTION

The L-Series converters utilize a single forward topology with resonant reset. The nominal switching frequency is 500kHz. Electrical isolation and tight output regulation are achieved through the use of a magnetically coupled feedback. Voltage feed-forward with duty factor limiting provides high line rejection and protection against output over voltage in the event of an internal control loop failure. This mechanism limits the maximum output voltage to approximately 20% over the nominal regardless of the line voltage.

An internal EMI filter allows the converter to meet the conducted emissions requirements of MIL-STD-461C on the input power leads. A single-stage output filter reduces the typical output ripple to less than 50mV peak-to-peak.

Output current is limited under any load fault condition to

approximately 125% of rated. An overload condition causes the converter output to behave like a constant current source with the output voltage dropping below nominal. The converter will resume normal operation when the load current is reduced below the current limit point. This protects the converter from both overload and short circuit conditions. The current limit point exhibits a slightly negative temperature coefficient to reduce the possibility of thermal runaway.

An external inhibit port is provided to control converter operation. The converter's operation is inhibited when this pin is pulled low. It is intended to be driven by an open collector logic device. The pin may be left open for normal operation and has a nominal open circuit voltage of 10.5V with respect to the input return (pin 2).

The output voltage of all models can be adjusted using a single external resistor.

DESIGN METHODOLOGY

The L-Series was developed using a proven conservative design methodology which includes selecting radiation tolerant and established reliability components and fully derating to the requirements of MIL-STD-975 and MIL-STD-1547. Heavy derating of the power MOSFET gate and drain voltages minimize the possibility of SEGR and SEB. A magnetic feedback circuit is utilized instead of opto-couplers to minimize temperature, radiation and aging sensitivity. PSPICE was used extensively to predict and optimize circuit performance for both beginning and end-of-life. Thorough design analyses include Radiation Susceptibility (TREE), Stress, Thermal, and Reliability (MTBF).

Absolute Maximum Ratings

Input voltage range -	-0.5Vdc to +75Vdc
Output power -	Internally limited
Lead temperature -	+300°C for 10 seconds
Operating temperature -	-55°C to +135°C
Storage temperature -	-55°C to +135°C

Recommended Operating Conditions

Input voltage range -	16Vdc to +60Vdc
Input voltage range ¹ -	16Vdc to +38Vdc
Output power -	0 to Max. Rated
Operating temperature ² -	-55°C to +125°C
Operating temperature ¹ -	-55°C to +70°C

¹ Meets derating per MIL-STD-975

² For operation at +125°C see table note 13

Electrical Performance Characteristics

Parameter	Group A Subgroup	Conditions -55°C ≤ T _C ≤ +85°C V _{IN} = 28V DC ± 5%, C _L = 0 unless otherwise specified	Limits			Unit
			Min	Nom	Max	
Input Voltage			18	28	50	
Output Voltage (V _{OUT})						
M3L2803S	1	I _{OUT} = 100% rated load Note 4	3.27	3.30	3.33	V
M3L2805S	1		4.95	5.00	5.05	
M3L2812S	1		11.88	12.00	12.12	
M3L2815S	1		14.85	15.00	15.15	
M3L2805D	1		±4.95	±5.00	±5.05	
M3L2812D	1		±11.88	±12.00	±12.12	
M3L2815D	1		±14.85	±15.00	±15.15	
M3L2803S	2,3		3.23		3.37	
M3L2805S	2,3		4.90		5.10	
M3L2812S	2,3		11.76		12.24	
M3L2815S	2,3		14.70		15.30	
M3L2805D	2,3		±4.90		±5.10	
M3L2812D	2,3		±11.76		±12.24	
M3L2815D	2,3		±14.70		±15.30	
Output power (P _{OUT})						
M3L2803S	1,2,3	V _{IN} = 16, 28, 50 Volts, Note 2	0		20	W
All Others			0		25	
Output current (I _{OUT})						
M3L2803S	1,2,3	V _{IN} = 16, 28, 50 Volts, Note 2	0		6.06	A
M3L2805S			0		5.00	
M3L2812S			0		2.08	
M3L2815S			0		1.67	
M3L2805D			0		4.00	
M3L2812D			0		1.67	
M3L2815D			0		1.33	
		Either Output, Note 3				
		Either Output, Note 3				
		Either Output, Note 3				
Line regulation (VR _{LINE})	1,2,3	V _{IN} = 16, 28, 50 Volts I _{OUT} = 0, 50%, 100% rated, Note 4	-0.5		0.5	%
Load regulation (VR _{LOAD})	1,2,3	I _{OUT} = 0, 50%, 100% rated, Note 4 V _{IN} = 16, 28, 50 Volts	-1.0		1.0	%
Cross regulation (VR _{CROSS})						
M3L2805D	1,2,3	Duals only, Note 5 V _{IN} = 16, 28, 50 Volts	-5.0		5.0	%
M3L2812D			-3.0		3.0	
M3L2815D			-3.0		3.0	
Input current (I _{IN})	1,2,3	I _{OUT} = 0, Pin 4 open			60 70 70 70 70 100 100	mA
		M3L2803S M3L2805S M3L2812S M3L2815S M3L2805D M3L2812D M3L2815D				
		Pin 4 shorted to pin 2			8	


Electrical Performance Characteristics (continued)

Parameter	Group A Subgroup	Conditions -55°C ≤ T _C ≤ +85°C V _{IN} = 28V DC ± 5%, C _L = 0 unless otherwise specified	Limits			Unit
			Min	Nom	Max	
Output ripple (V _{RIP}) M3L2803S M3L2805S M3L2812S M3L2815S M3L2805D M3L2812D M3L2815D	1,2,3	V _{IN} = 16, 28, 50 Volts I _{OUT} = 100% rated load Notes 4, 6			35 50 70 80 80 80 80	mV p-p
Switching frequency (F _S)	1,2,3	Sync. Input (Pin 4) open	425	500	575	KHz
Efficiency (E _{FF}) M3L2803S M3L2805S M3L2812S M3L2815S M3L2805D M3L2812D M3L2815D	1,2,3	I _{OUT} = 100% rated load Note 4	68 75 75 75 75 75 75	75 79 80 81 79 79 80		%
Enable Input (Inhibit Function) open circuit voltage drive current (sink) voltage range	1,2,3	Note 1	9.5 -0.5		11.5 500 50	V μA V
Current Limit Point Expressed as a percentage of full rated load current	1,2,3	V _{OUT} = 90% of Nominal, Note 4	105		130	%
Power dissipation, load fault (P _D)	1,2,3	Short Circuit, Overload, Note 8			14	W
Output response to step load changes (V _{TLD})	4,5,6	Half Load to/from Full Load, Notes 4,9	-300		300	mV pk
Recovery time, step load changes (T _{TLD})	4,5,6	Half Load to/from Full Load, Note 4,9,10			200	μS
Output response to step line changes (V _{TLN})	4,5,6	16V to/from 50V I _{OUT} = 100% rated load, Notes 1,4,11	-300		300	mV pk
Recovery time, step line changes (T _{TLN})	4,5,6	16V to/from 50V I _{OUT} = 100% rated load, Notes 1,4,10,11			200	μS
Turn-on Response Overshoot (V _{OS}) Turn-on Delay (T _{DLY})	4,5,6	No Load, Full Load Notes 4,12	2		500 10	mV mS
Capacitive Load (CL) M3L2803S M3L2805S M3L2812S M3L2815S M3L2805D M3L2812D M3L2815D	1	I _{OUT} = 100% rated load No effect on DC performance Notes 1, 4, 7 Each output on duals			2200 1000 180 120 500 90 60	μF
Line Rejection	1	I _{OUT} = 100% rated load DC to 50KHz, Notes 1, 4	40	50		dB
Isolation	1	Input to Output or Any Pin to Case except pin 3, test @ 500VDC	100			MΩ
Device Weight					85	grams
MTBF		MIL-HDBK-217F2, SF, 35°C	1.5 x 10 ⁶			Hours

Table I. Electrical Performance Characteristics - notes

1. Parameter is tested as part of design characterization or after design changes. Thereafter, parameter shall be guaranteed to the limits specified.
2. Parameter verified during line and load regulation tests.
3. Output load current must be distributed such that at least 20% of the total load current is being provided by one of the outputs.
4. Load current split equally between outputs on dual output models.
5. Cross regulation is measured with 20% rated load on output under test while changing the load on the other output from 20% to 80% of rated.
6. Guaranteed for a D.C. to 20MHz bandwidth. Tested using a 20KHz to 10MHz bandwidth using the circuit shown below.
7. Capacitive load may be any value from 0 to the maximum limit without compromising dc performance.
A capacitive load in excess of the maximum limit may interfere with the proper operation of the converter's overload protection, causing erratic behavior during turn-on.
8. Overload power dissipation is defined as the device power dissipation with the load set such that $V_{OUT} = 90\%$ of nominal.
9. Load step transition time $\geq 10 \mu\text{Sec}$.
10. Recovery time is measured from the initiation of the transient to where V_{OUT} has returned to within $\pm 1\%$ of its steady state value.
11. Line step transition time $\geq 100 \mu\text{Sec}$.
12. Turn-on delay time from either a step application of input power or a logic low to a logic high transition on the inhibit pin (pin 4) to the point where $V_{OUT} = 90\%$ of nominal.
13. For operation at temperatures between $+85^{\circ}\text{C}$ and $+125^{\circ}\text{C}$, derate the maximum output power linearly from 100% to 75%.

Circuit for Measuring Output Ripple Voltage

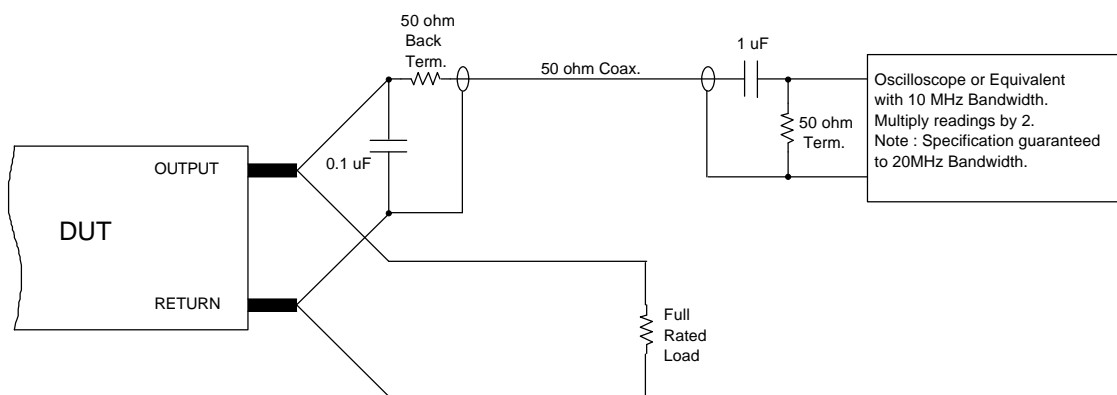


Radiation Performance Characteristics

Test	Conditions	Min	Typ	Highest Level Tested	Unit
Total Ionizing Dose (Gamma)	MIL-STD-883, Method 1019 Operating bias applied during exposure, Full Rated Load, $V_{IN} = 28V$	25	40	60	Krads (Si)
Single Event Effects SEU, SEL, SEGR, SEB	Heavy ions (LET) Operating bias applied during exposure, Full Rated Load, $V_{IN} = 28V$	>37	>82	82	MeV·cm ² /mg
Dose Rate (Gamma Dot) Temporary Saturation Survival	MIL-STD-883, Method 1023 Operating bias applied during exposure, Full Rated Load, $V_{IN} = 28V$	1E8 1E10		1.5E9	Rads (Si)/sec
Neutron Fluence	MIL-STD-883, Method 1017	3E12		8E12	Neutrons /cm ²
Proton Fluence	E > 10MeV	TBD		N/A	protons /cm ²

Device Screening

Test Inspection	Method	Condition
Element Evaluation	MIL-PRF-38534 class H equivalent with SEM	
Nondestructive Bond Pull	MIL-STD-883, Method 2023	
Internal Visual	MIL-STD-883, Method 2017	
Temperature Cycling	MIL-STD-883, Method 1010	C
Constant Acceleration	MIL-STD-883, Method 2001 (2k-g)	A, Y1 axis only
Electrical	In accordance with device specification	
Burn-in	MIL-STD-883, Method 1015	160 Hours
Final Electrical (Group A)	In accordance with device specification	
Seal Fine Leak Gross Leak	MIL-STD-883, Method 1014	A1 C
External Visual	MIL-STD-883, Method 2009	


Mechanical Diagram

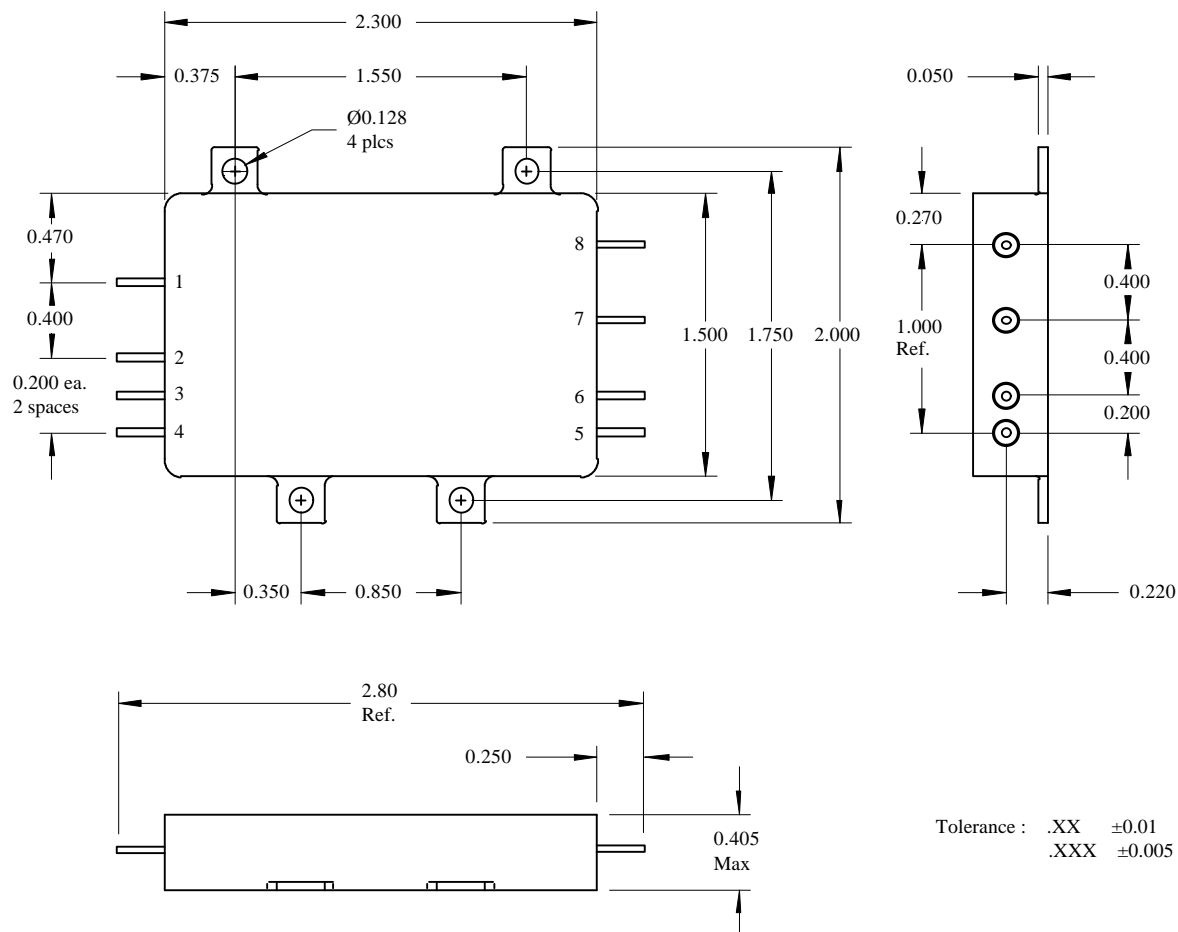


Pin Designation (Single/Dual)

Pin 1	+V Input
Pin 2	Input Return
Pin 3	Case Ground
Pin 4	Inhibit
Pin 5	Output Adjust
Pin 6	Output return / -Vout
Pin 7	+Vout / Common
Pin 8	NC / +Vout


Part Number

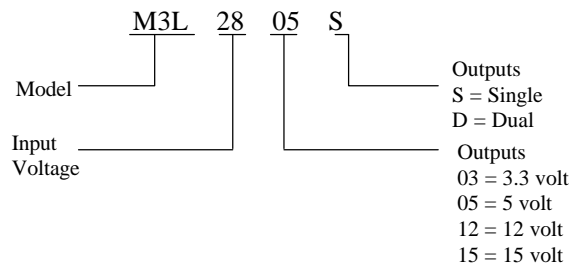


Block Diagram - Single Output

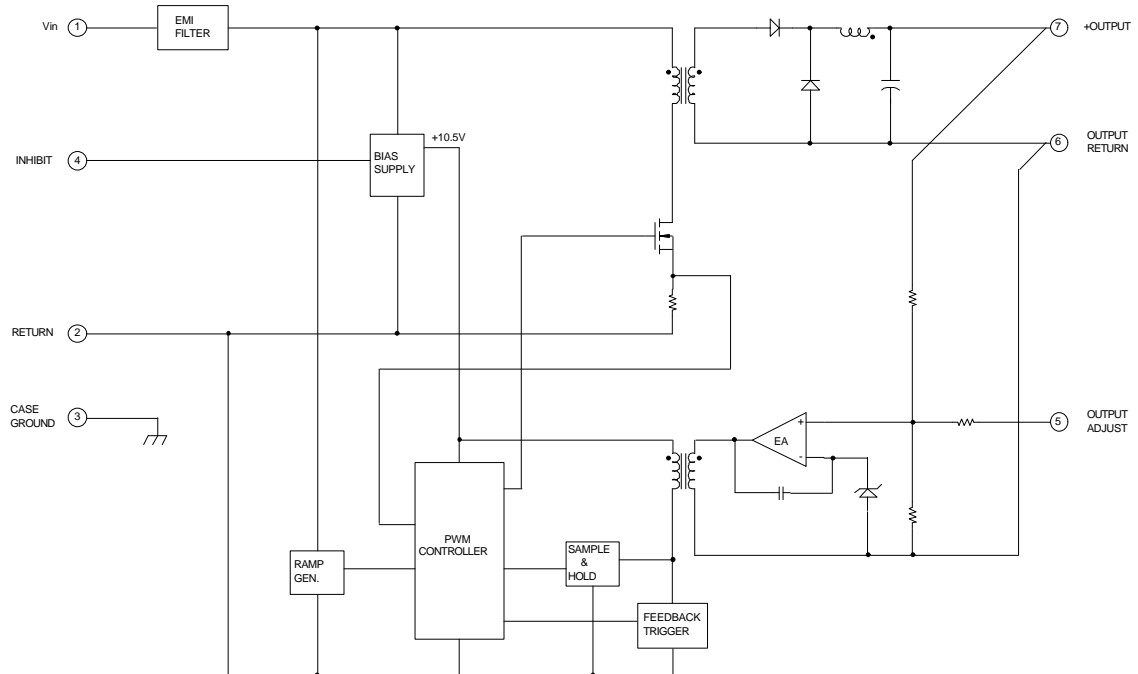


Block Diagram - Dual Output

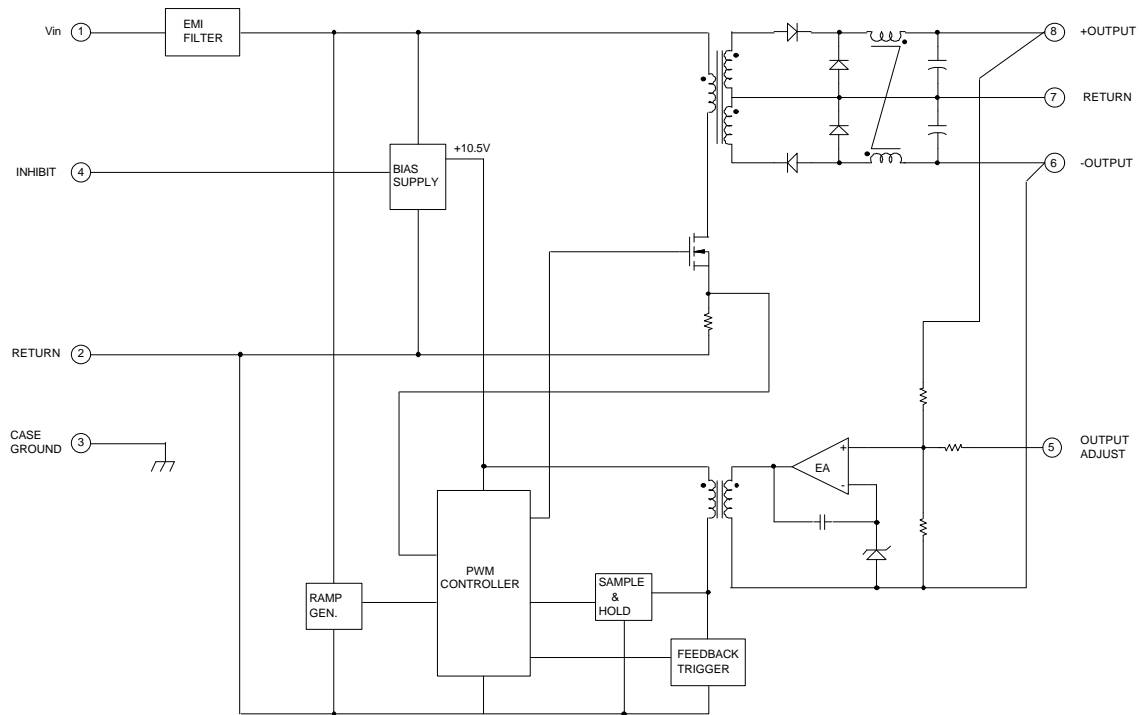


Conducted Emissions, Common Mode

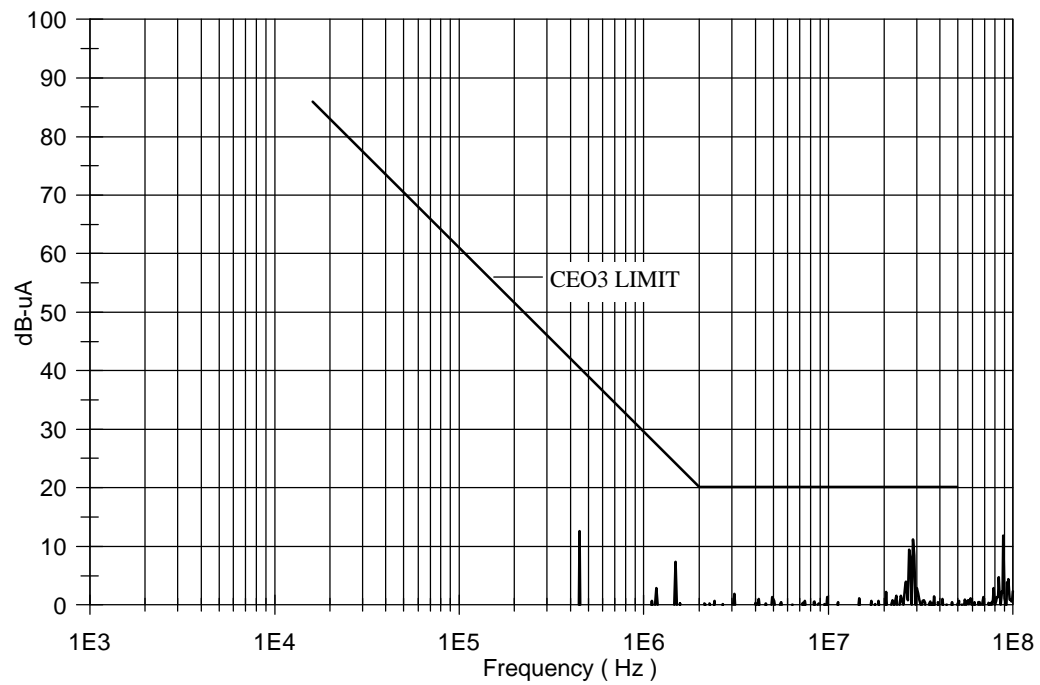


Conducted Emissions, Normal Mode

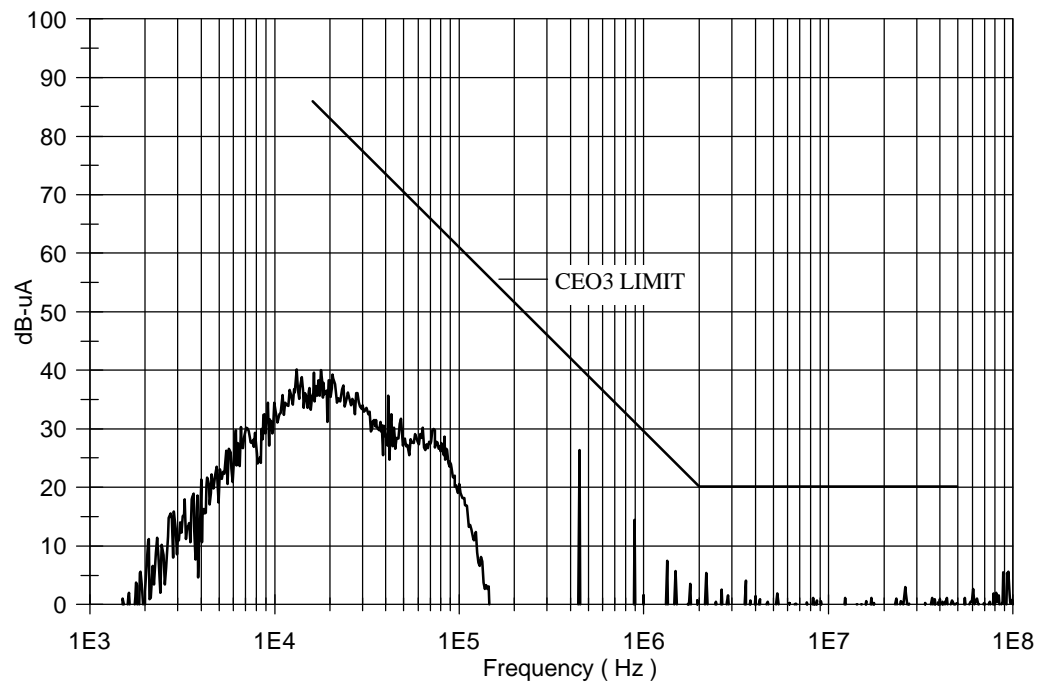


M3L2805S Line Rejection (CS01)

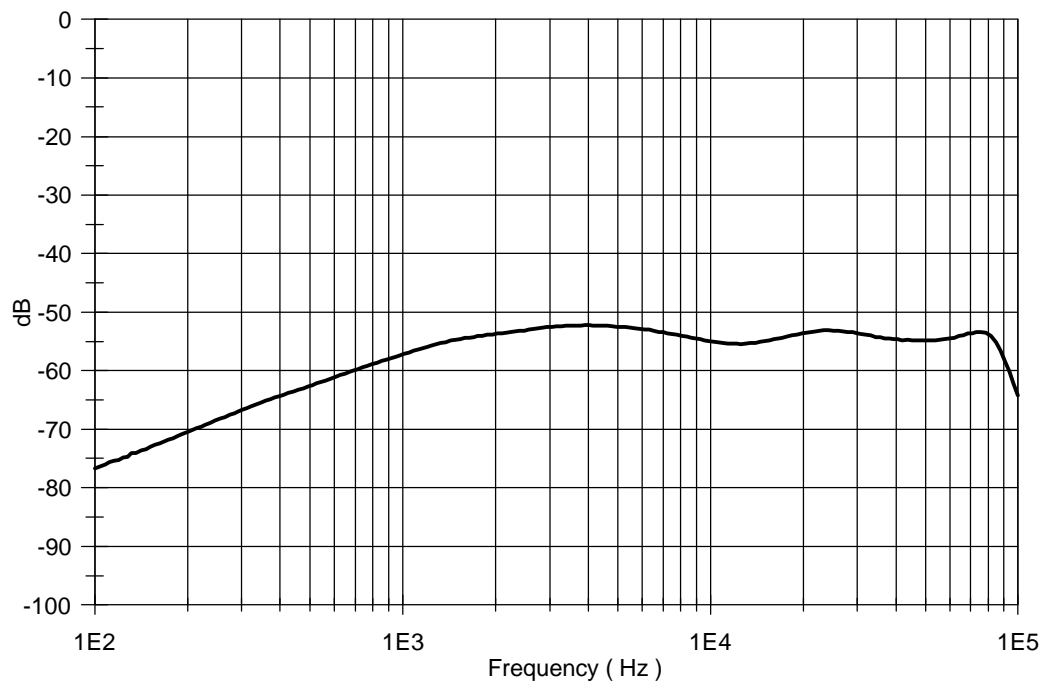

M3L2815D Line Rejection (CS01)

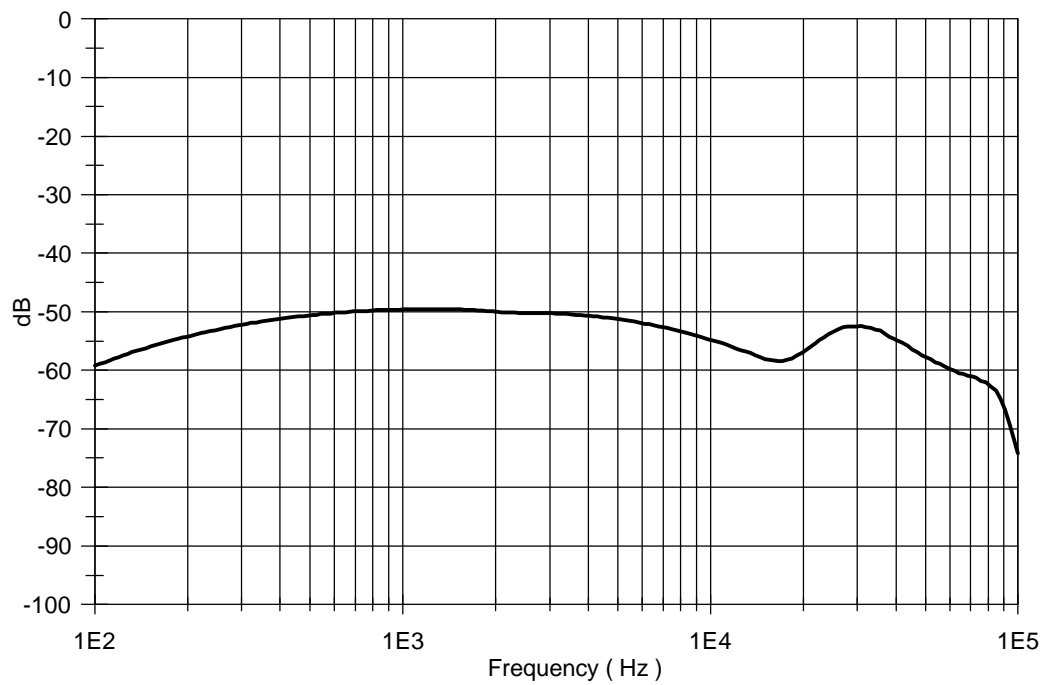

M3L2805S Efficiency vs Line and Load

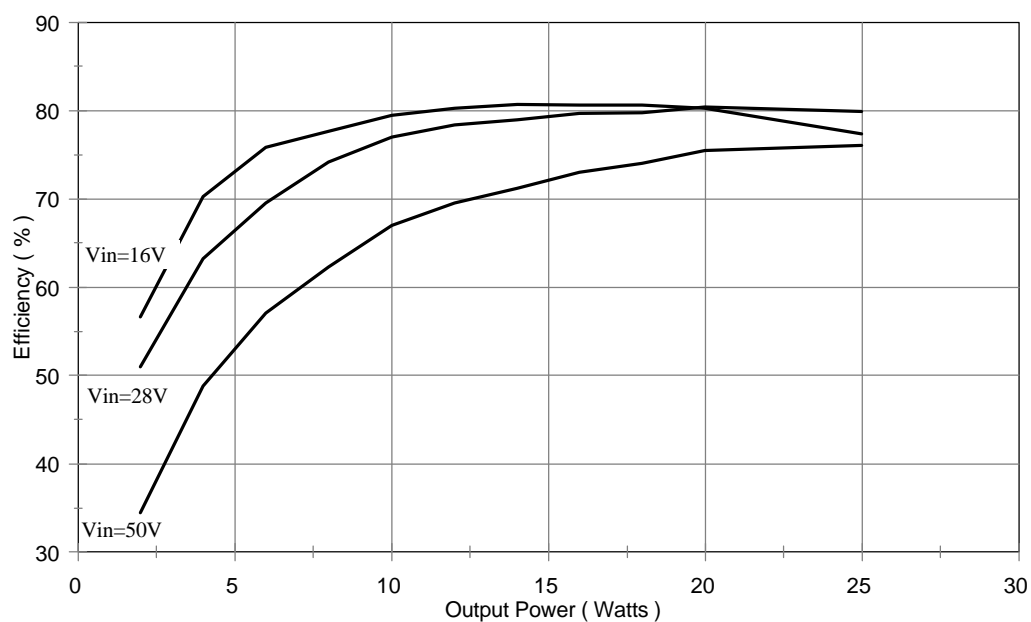

©Magnitude-3, LLC

The information in this data sheet has been carefully checked and is believed to be accurate, however no responsibility is assumed for possible errors. These specifications are subject to change without notice.

0106



Advanced Analog/M-3
2270 Martin Avenue
Santa Clara, CA 95050
PH. (408) 436-5540 FAX (408) 436-5544
Email: sales@mag3.com
Web Site: www.mag3.com