



LH1556AB/AAC/AACTR

Dual 1 Form A Solid State Relay

FEATURES

- Dual Channel (LH1546)
- Current Limit Protection
- I/O Isolation, 5300 V_{RMS}
- Typical R_{ON} 20 Ω
- Load Voltage 350 V
- Load Current 120 mA
- High Surge Capability
- Linear, AC/DC Operation
- Clean Bounce Free Switching
- Low Power Consumption
- SMD Lead Available on Tape and Reel
- Flammability; UL94, V0

AGENCY APPROVALS

- UL – File No. E52744
- CSA – Certification 093751
- BSI/BABT Cert. No. 7980
- VDE 0884 Approval
- FIMKO Approval

APPLICATIONS


- General Telecom Switching
 - On/off Hook Control
 - Ring Delay
 - Dial Pulse
 - Ground Start
 - Ground Fault Protection
- Instrumentation
- Industrial Controls

DESCRIPTION


The LH1556 dual 1 Form A relays are SPST normally open switches that can replace electromechanical relays in many applications. They are constructed using a GaAlAs LED for actuation control and an integrated monolithic die for the switch output. The die, fabricated in a high-voltage dielectrically isolated technology is comprised of a photodiode array, switch control circuitry, and MOSFET switches. In addition, the LH1556 SSRs employ current-limiting circuitry, enabling them to pass FCC 68.302 and other regulatory surge requirements when overvoltage protection is provided.

Package Dimensions in Inches (mm)

DIP

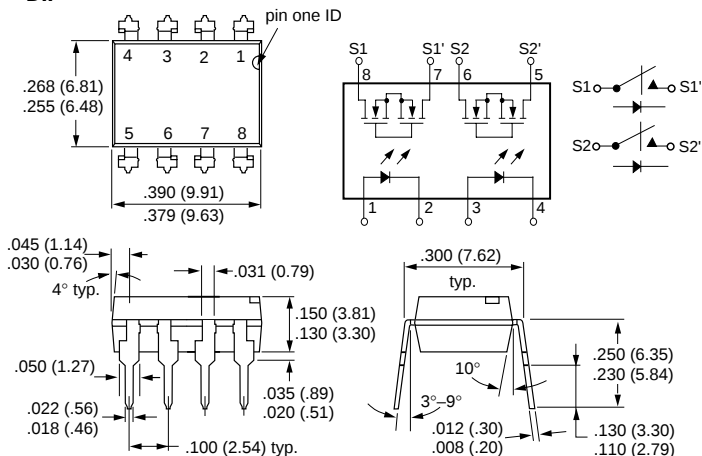


SMD

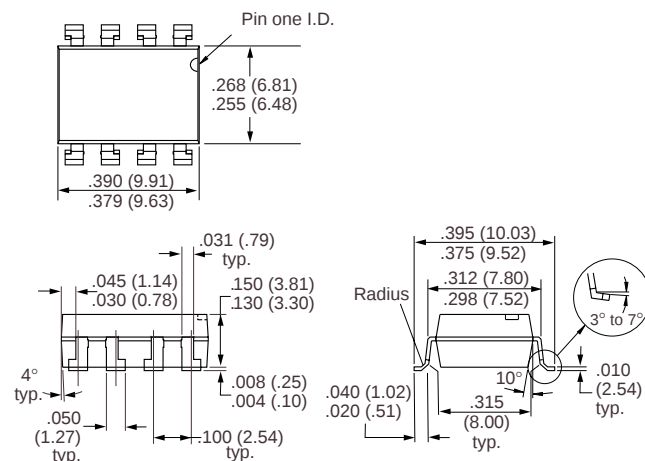

Part Identification

Part Number	Description
LH1556AB	8-pin DIP, Tubes
LH1556AAC	8-pin SMD, Gullwing, Tubes
LH1556AACTR	8-pin SMD, Gullwing, Tape and Reel

Recommended Operating Conditions

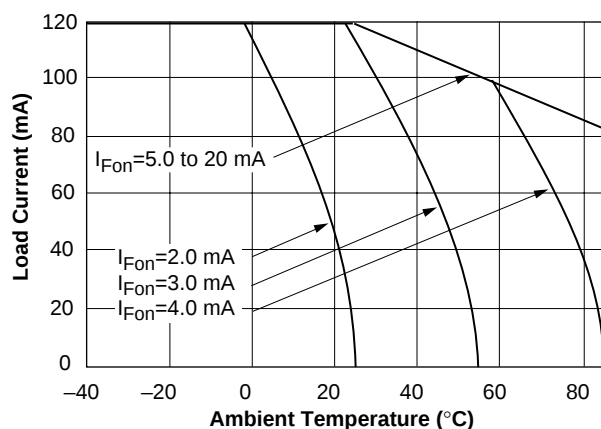

Absolute Maximum Ratings, $T_A=25^{\circ}\text{C}$

Stresses in excess of the absolute Maximum Ratings can cause permanent damage to the device. These are absolute stress ratings only. Functional operation of the device is not implied at these or any other conditions in excess of those given in the operational sections of this document. Exposure to absolute Maximum Ratings for extended periods of time can adversely affect reliability.

Ambient Temperature Range (T_A)		-40 to +85°C
Storage Temperature Range (T_{stg})		-40 to +150°C
Pin Soldering Temperature ($t=10$ s max) (T_S)		260°C
Input/Output Isolation Voltage		
($t=1.0$ s) (V_{ISO})		5300 V _{RMS}
Pole-to-Pole Isolation Voltage (S1 to S2)*		
(dry air, dust free, at sea level)		1600 V
LED Continuous Forward Current (I_F)		50 mA
LED Reverse Voltage ($I_R \leq 10 \mu\text{A}$) (V_R)		8.0 V
DC or Peak AC Load Voltage ($I_L \leq 50 \mu\text{A}$) (V_L)		350 V
Continuous DC Load Current (I_L)		
One Pole Operating		120 mA
Two Poles Operating		110 mA
Peak Load Current ($t=100$ ms) (single shot) (I_P)		†
Output Power Dissipation (continuous) (P_{DISS})		550 mW

* Breakdown occurs between the output pins external to the package.

† Refer to Current Limit Performance Application Note for a discussion on relay operation during transient currents.

Electrical Characteristics, $T_A=25^{\circ}\text{C}$

Minimum and maximum values are testing requirements. Typical values are characteristics of the device and are the result of engineering evaluations. Typical values are for information only and are not part of the testing requirements.

Parameter	Symbol	Min.	Typ.	Max.	Units	Test Conditions
Input						
LED Forward Current, Switch Turn-on	I_{Fon}	—	1.1	2.0	mA	$I_L=100$ mA, $t=10$ ms
LED Forward Current, Switch Turn-off	I_{Foff}	0.2	1.0	—	mA	$V_L \pm 350$ V
LED Forward Voltage	V_F	1.15	1.26	1.45	V	$I_F=10$ mA
Output						
ON-resistance, ac/dc: Pin 4 ($\pm$) to 6 ($\pm$)	R_{ON}	—	28	35	Ω	$I_F=5.0$ mA, $I_L=50$ mA
ON-resistance, dc: Pin 4, 6 (+) to 5 (-)		—	7.0	10.0	Ω	$I_F=5.0$ mA, $I_L=100$ mA
OFF-resistance	R_{OFF}	0.5	300	—	G Ω	$I_F=0$ mA, $V_L=\pm 100$ V
Current Limit ac/dc	I_{LMT}	170	210	250	mA	$I_F=5.0$ mA, $t=5.0$ ms $V_L=6.0$ V
Off-state Leakage Current	I_O	—	1.25	200	nA	$I_F=0$ mA, $V_L=\pm 100$ V
		—	0.096	1.0	μA	$I_F=0$ mA, $V_L=\pm 350$ V
Output Capacitance, Pin 4 to 6	C_O	—	18	—	pF	$I_F=0$ mA, $V_L=1.0$ V
		—	6.7	—	pF	$I_F=0$ mA, $V_L=50$ V
Switch Offset	V_{OS}	—	0.3	—	μV	$I_F=5.0$ mA
Transfer						
Input/Output Capacitance	C_{ISO}	—	0.67	—	pF	$V_{ISO}=1.0$ V
Turn-on Time	t_{on}	—	1.14	3.0	ms	$I_F=5.0$ mA, $I_L=50$ mA
Turn-off Time	t_{off}	—	0.71	3.0	ms	$I_F=5.0$ mA, $I_L=50$ mA

Typical Performance Characteristics

Figure 1. LED Voltage vs. Temperature

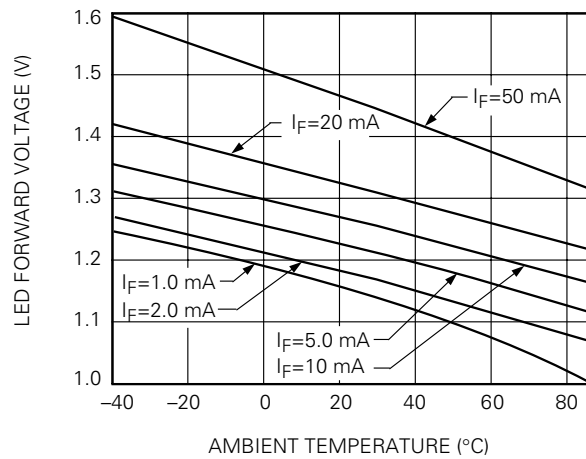


Figure 2. LED Forward Current vs. LED Forward Voltage

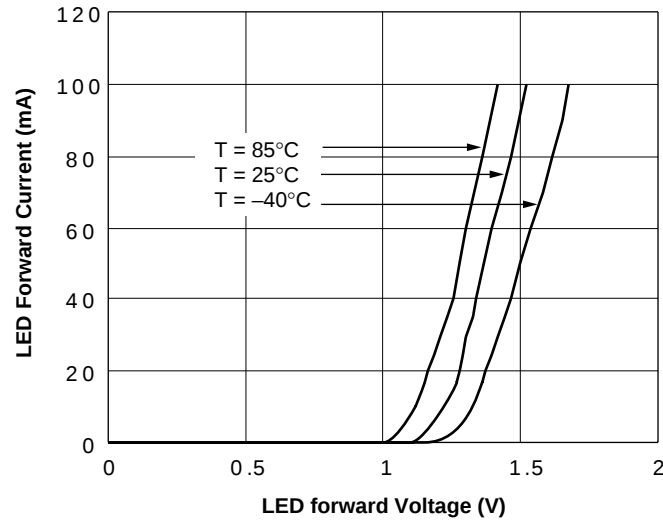


Figure 3. LED Reverse Current vs. LED Reverse Voltage

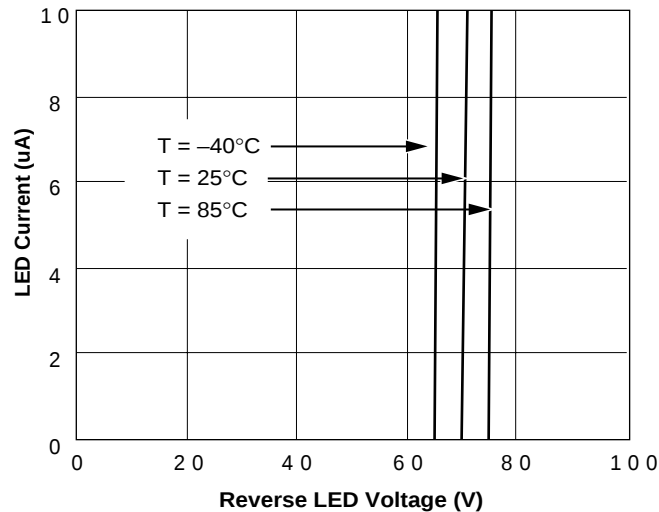


Figure 4. LED Current for Switch Turn-on vs. Temperature

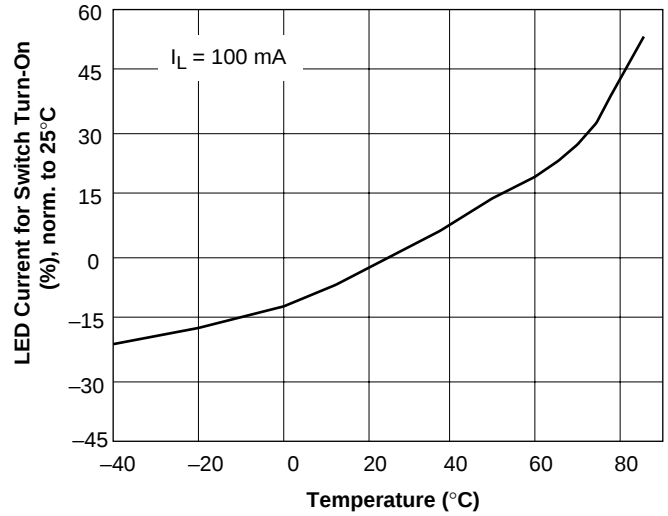


Figure 5. LED Dropout Voltage vs. Temperature

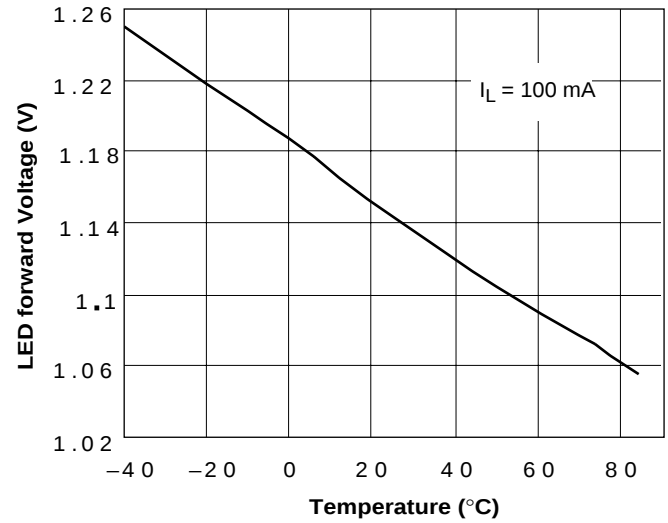


Figure 6. Load Current vs. Load Voltage

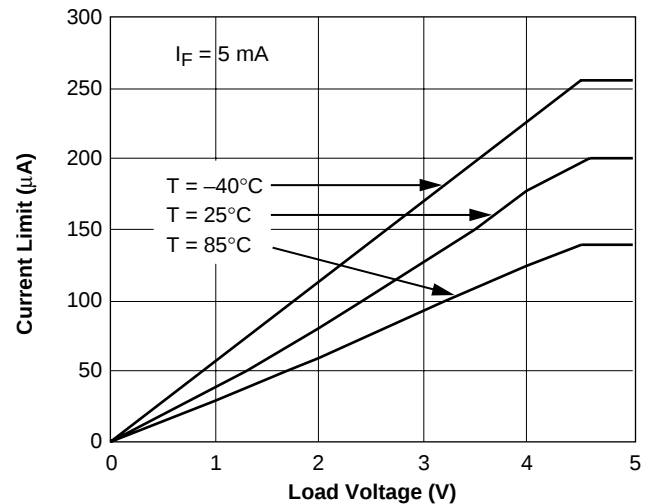


Figure 7. Current Limit vs. Temperature

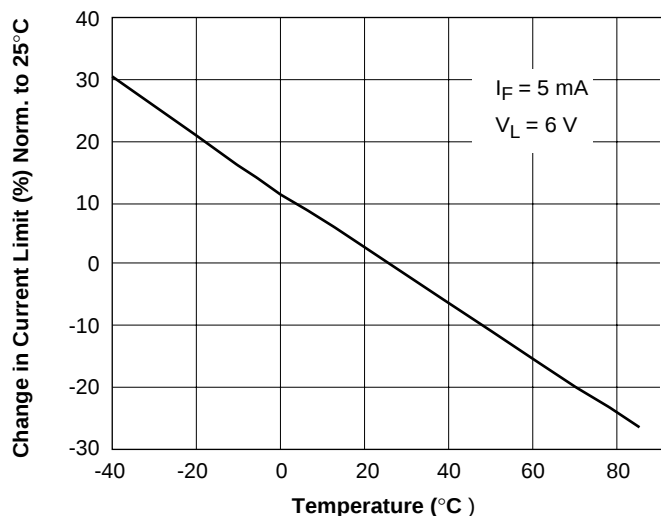


Figure 10. ON-Resistance vs. Temperature

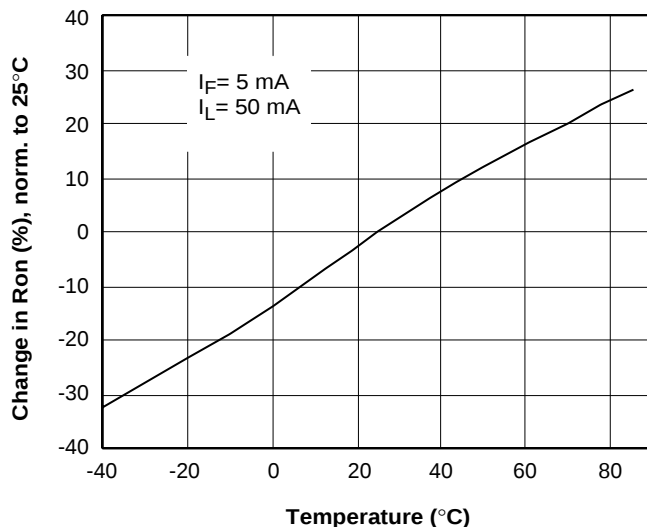


Figure 8. Switch Breakdown Voltage vs. Load Current

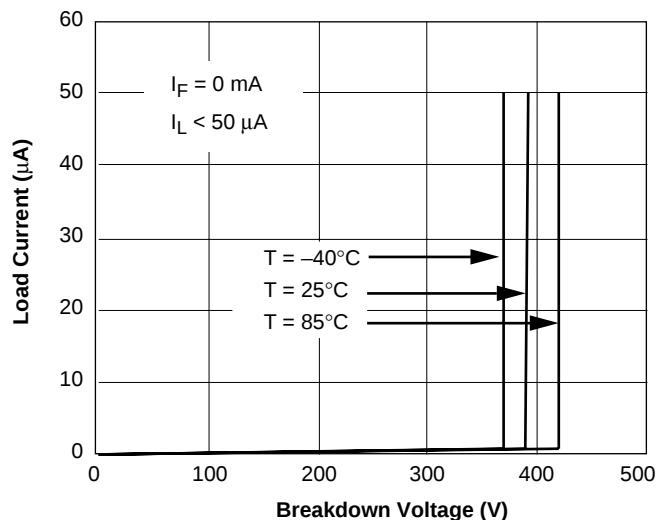


Figure 11. Variation in ON-Resistance vs. LED Current

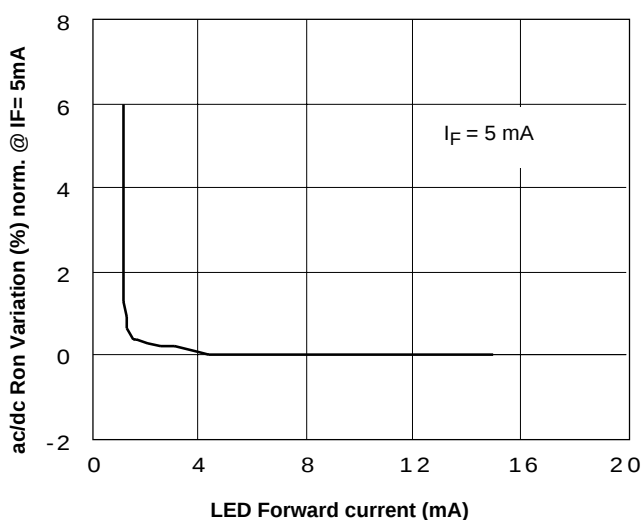


Figure 9. Switch Offset Voltage vs. LED Current

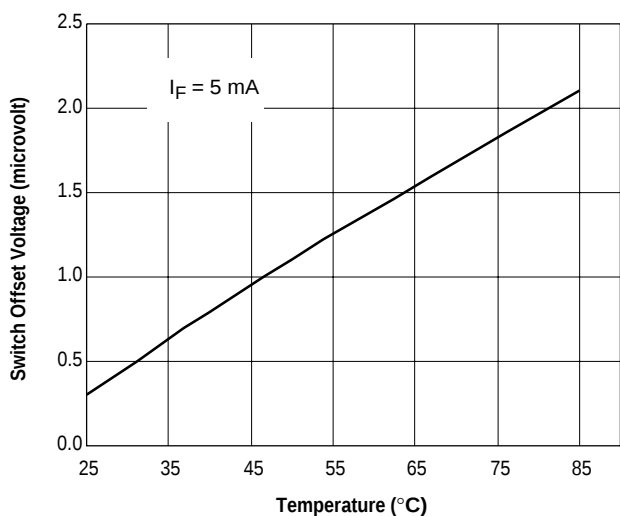


Figure 12. Switch Capacitance vs. Applied Voltage

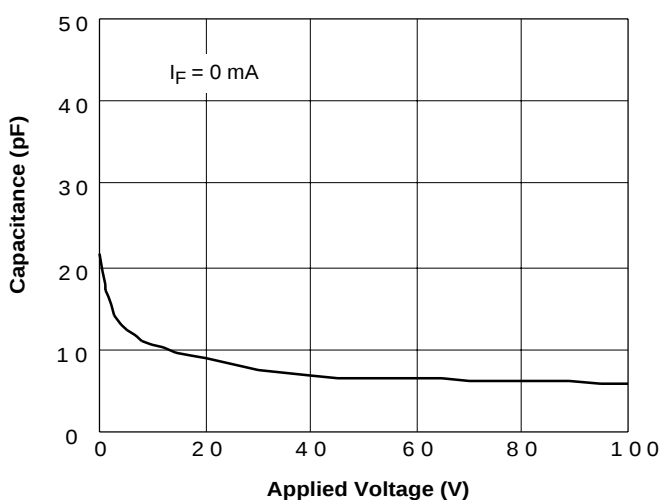


Figure 13. Insertion Loss vs. Frequency

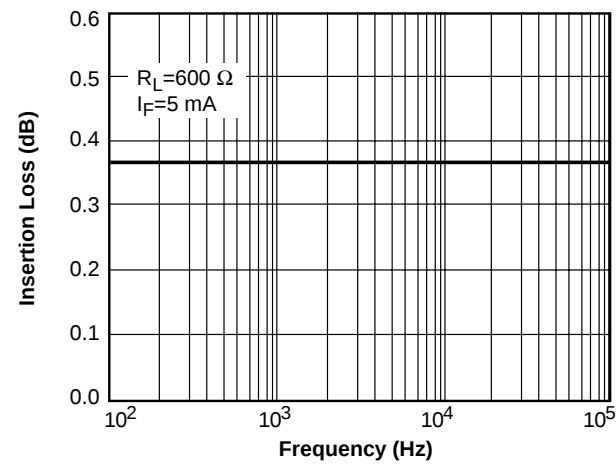


Figure 16. Switch Breakdown Voltage vs. Temperature

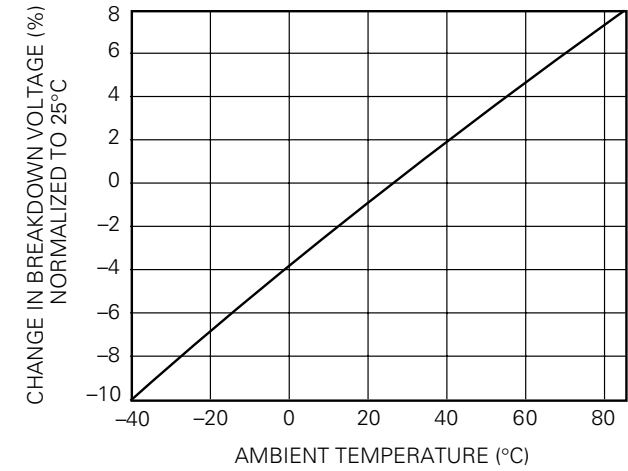


Figure 14. Output Isolation

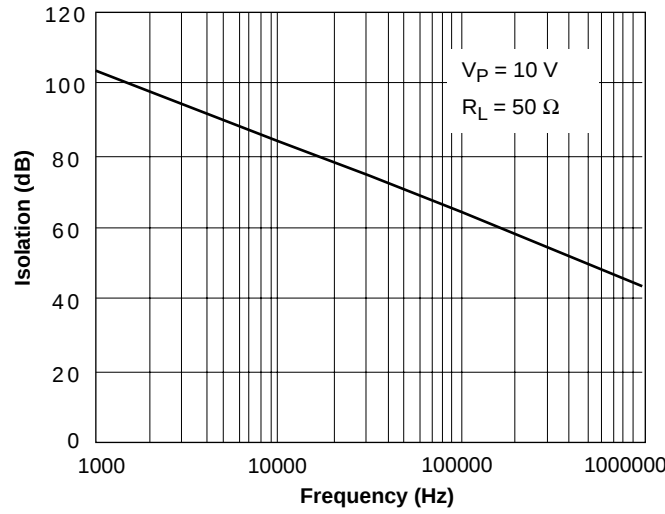


Figure 17. Switch Offset Voltage vs. Temperature

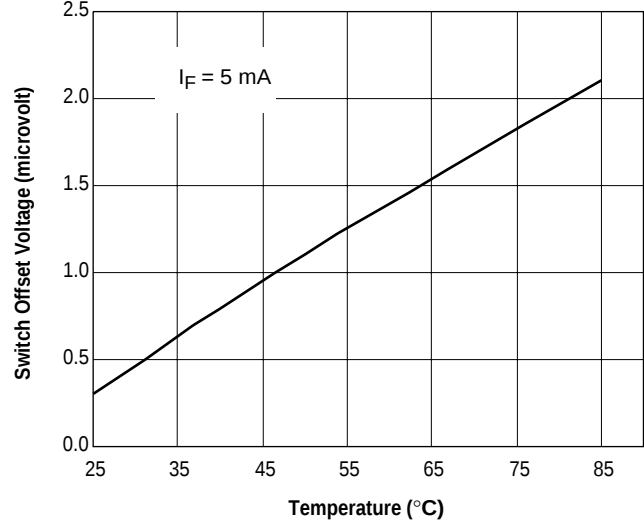


Figure 15. Leakage Current vs. Applied Voltage at Elevated Temperatures

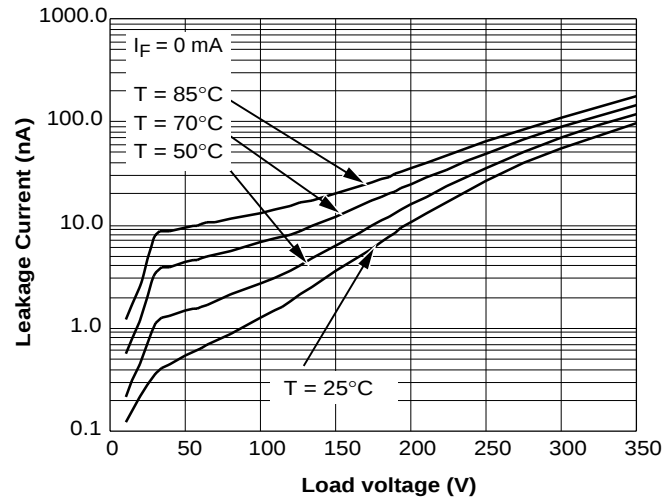


Figure 18. Turn-On Time vs. Temperature

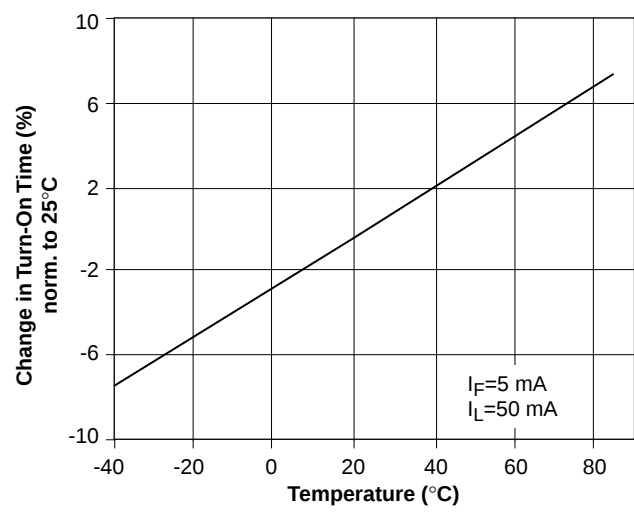


Figure 19. Turn-Off Time vs. Temperature

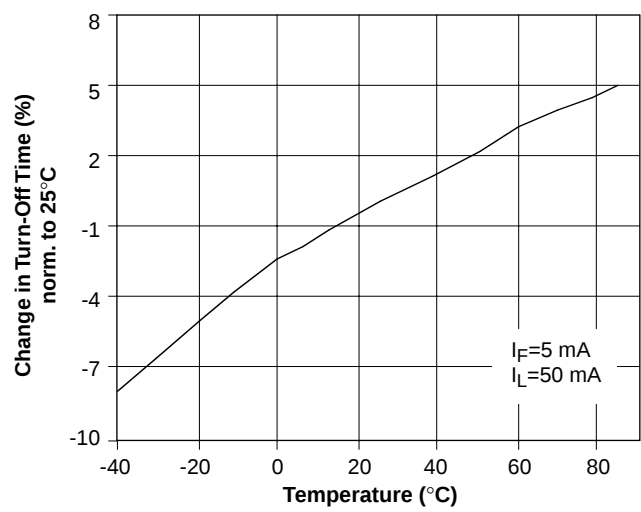


Figure 21. Turn-Off Time vs. LED Current

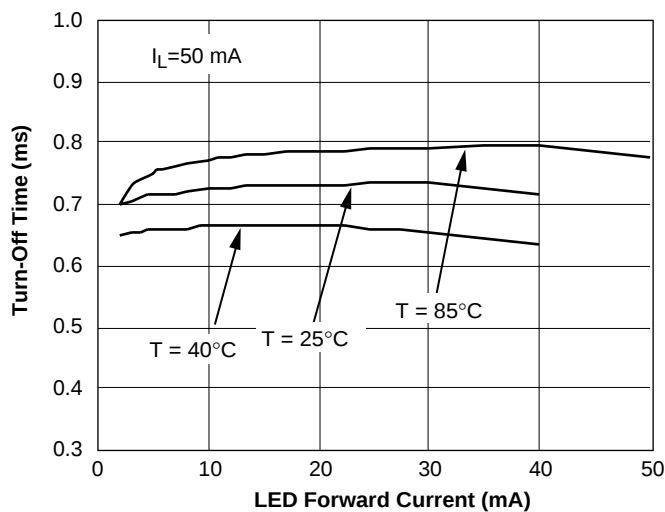


Figure 20. Turn-On Time vs. LED Current

