


L2425

Dimming Option

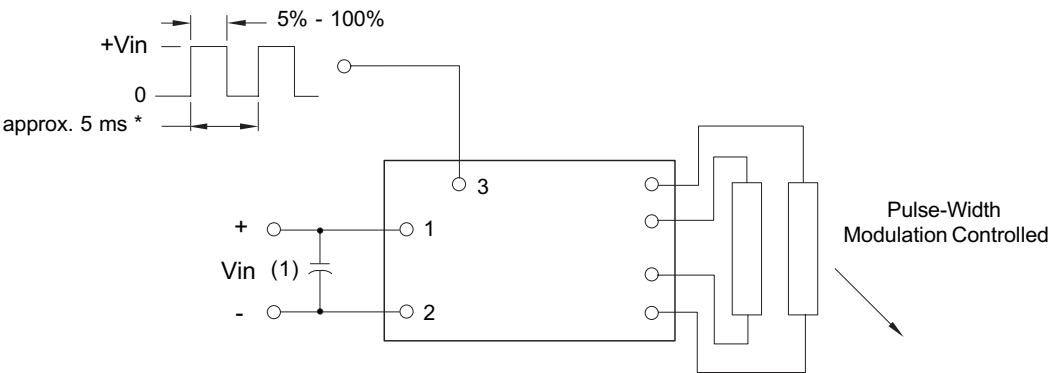

* should be selected to be compatible with LCD and display driver.

Note 1 Input by-pass capacitor (25uf - 100uf) may be required to reduce reflected ripple.



Endicott Research Group, Inc.
2601 Wayne St., Endicott NY 13760
607-754-9187



Endicott Research Group, Inc.
2601 Wayne St., Endicott NY 13760
607-754-9187 Fax 607-754-9255
<http://www.ergpower.com>

Specifications and Applications Information

07/19/2000

Preliminary

The ERG L2425 (*8m Class*) low profile dc to ac inverter is specifically designed to power the Hitachi TX38D31VC1CAA LCD display module to a moderate brightness level from a +12 volt dc source.

This low profile inverter features:


- ✓ Less Than 8 mm in Height
- ✓ LCD Module Specific
- ✓ Display Compatible Output Connector
- ✓ Firm Specifications
- ✓ Application Information
- ✓ Designed, Manufactured and Supported in the USA
- ✓ Custom Input and Output Voltages
- ✓ Flexible System Interface
- ✓ Notebook Display Head Compatible

Pin Descriptions

Input Connector		Output Connectors	
MOLEX 22-05-3041		JST SM02(8.0)B-BHS1TB	
J2-1	Vin	J1-1	ACout
J2-2	GND	J1-2	NC
J2-3	Control	J1-3	ACcommon
J2-4	NC	J3-1	ACout
		J3-2	NC
		J3-3	ACcommon


L2425

8m Class
DC to AC Inverter



8m Package

Package Configuration

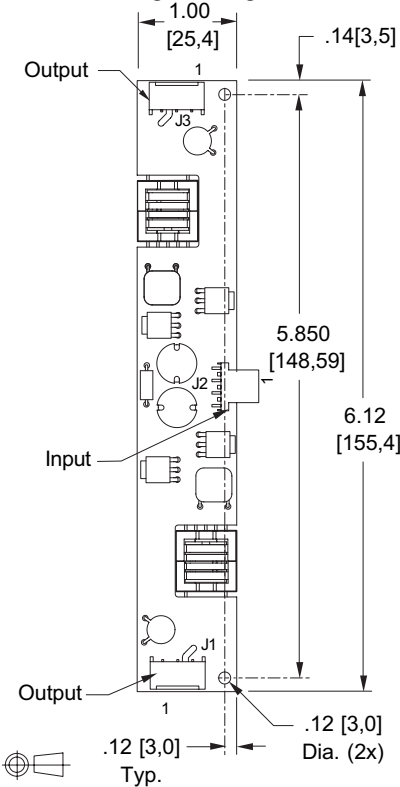

L2425

Absolute Maximum Ratings

Rating	Symbol	Value	Units
Input Voltage Range	Vin	-0.3 to +13.2	Vdc
Operating Temperature	To	0 to +70	°C
Storage Temperature	Tstg	-40 to +85	°C

Recommended Operating Conditions

Rating	Symbol	Value	Units
Input Voltage	Vin	+6 to 13.2	Vdc

Electrical Characteristics

Unless otherwise noted Vin = 12.00 Volts dc and Ta = 25 °C

Characteristic	Symbol	Min	Typ	Max	Units
Input Current	Iin	-	.96	1.1	Adc
Operating Frequency	Fo	38	43	48	KHz
Minimum Output Voltage	Vout (min)	1500	-	-	Vrms
Efficiency	η	-	81	-	%
Output Current per tube	Iout	-	7	-	marms
Output Voltage (when Powering a load simulating the referenced display)	Vout	-	665	-	Vrms
Pin3 Input Current Requirement	-	-	26	-	madc

After tube has been allowed to warm-up for 5 minutes
External Disable Circuit shown on page 3.


Specifications subject to change without notice.




Endicott Research Group, Inc.

Typical Performance Curves

L2425

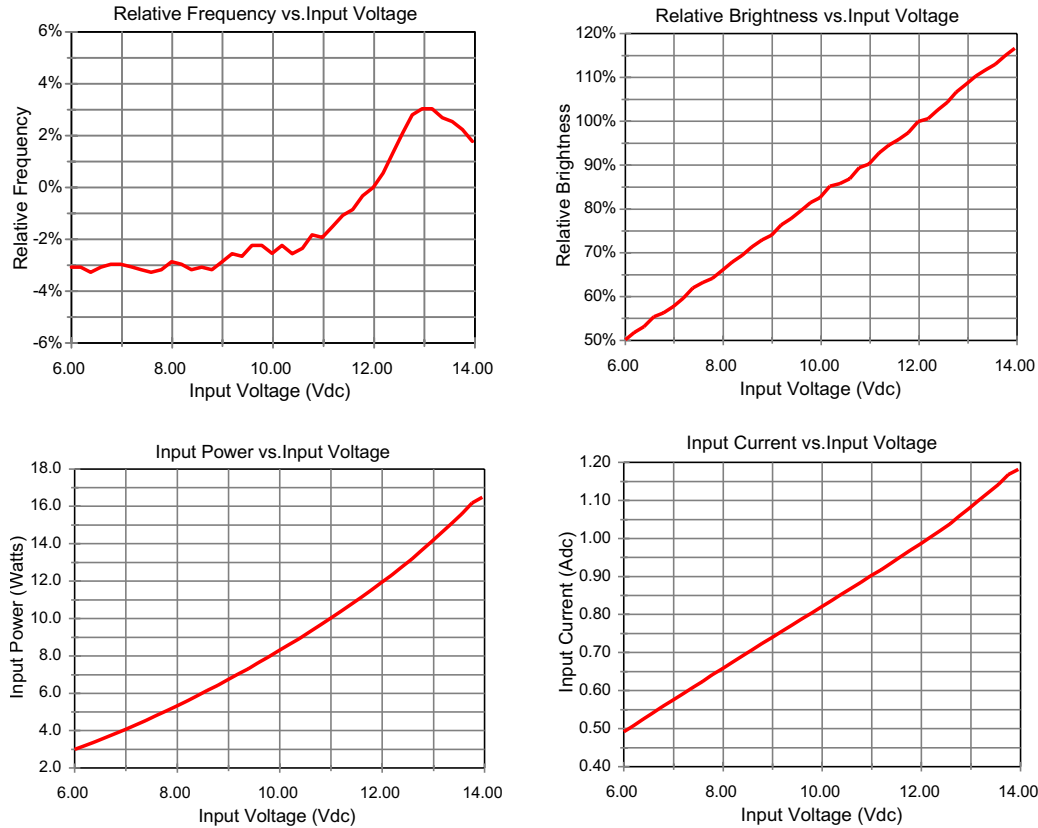

Disable Circuit

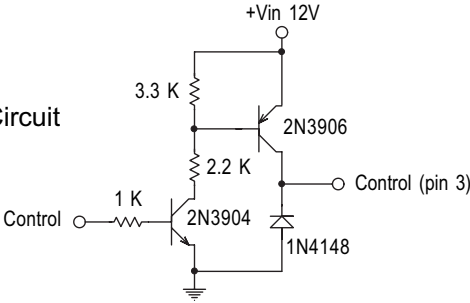

Endicott Research Group, Inc.