

LQ056A3CH01

Color TFT-LCD Module

(LCD TV/Digital still camera)

Features

- 14 cm [5.6"] display size
- Built-in DC/AC converter for backlight drive


Specifications

Parameter		Unit
Display size	14 [5.6]	cm ["]
No. of pixels	74 880	pixel
Dot format (H x V)	320 x RGB x 234	dot
Dot pitch (H x V)	0.119 x 0.357	mm
Active area (H x V)	114.2 x 83.5	mm
Input signal system	NTSC	ı
Input video signal	Standard Analog RGB	ı
Viewing direction	6:00	-

Parameter		Unit
Backlight type	1CCFT(D)	-
Brightness	300	cd/m ²
Power consumption	5.5	W
Outline dimensions (W x H x D)	140.0 x 102.7 x 17.0	mm
Weight	260	g
Operating temperature	-10 to +80	°C
Storage temperature	-30 to +80	°C

Outline Dimensions



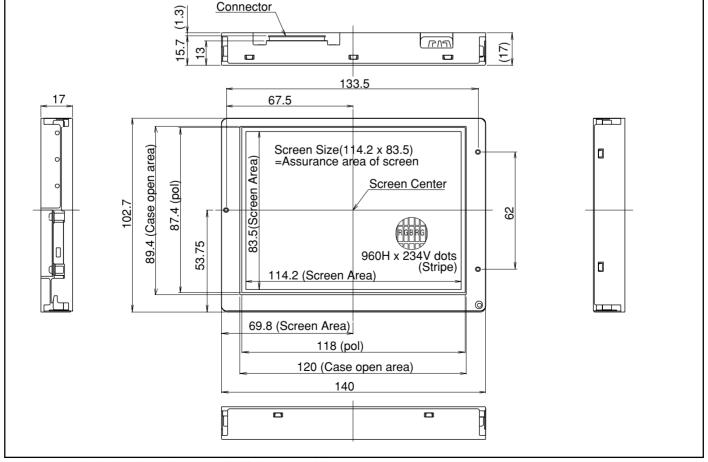

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

Suggested applications (if any) are for standard use; See Important Restrictions for limitations on special applications. See Limited Warranty for SHARP's product warranty. The Limited Warranty is in lieu, and exclusive of, all other warranties, express or implied. ALL EXPRESS AND IMPLIED WARRANTIES, INCLUDING THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR USE AND FITNESS FOR A PARTICULAR PURPOSE, ARE SPECIFICALLY EXCLUDED. In no event will SHARP be liable, or in any way responsible, for any incidental or consequential economic or property damage.



NORTH AMERICA

SHARP Microelectronics of the Americas 5700 NW Pacific Rim Blvd. Camas, WA 98607, U.S.A. Phone: (360) 834-2500 Fax: (360) 834-8903 http://www.sharpsma.com

EUROPE

SHARP Microelectronics Europe Sonninstraße 3 20097 Hamburg, Germany Phone: (49) 40 2376-2286 Fax: (49) 40 2376-2232 http://www.sharpsme.com

ASIA

SHARP Corporation Integrated Circuits Group 2613-1 Ichinomoto-Cho Tenri-City, Nara, 632, Japan Phone: +81-743-65-1321 Fax: +81-743-65-1532 http://www.sharp.co.jp