

1.28 ÷ 1.34
μm

Pulse output power
> 100 mW

LFO-27-ip

Description:

LFO-27-ip – is a series of optical modules based on Mitsubishi high-efficiency pulse 1310nm MQW InGaAsP/InP Fabry-Perot laser diode and coupled with multimode optical fiber. Hermetically sealed modules are performed in standard coaxial package with collimating gradient lens. The modules operate in wide temperature range, have stable output power and more than $5 \cdot 10^5$ hours of lifetime.

LFO-27-ip – are the best light sources for optical reflectometers and other metrology devices.



Absolute maximum ratings:

Laser diode

Pulse operating current (mA)	800
CW operating current (mA)	50
Reverse voltage (V)	2.0
Pulse duration (μs)	10
Reverse duty free	100

Environment

Operating temperature range (°C)	-40..+55
Storage temperature range (°C)	-40..+70

Assembly

Pin soldering temperature (°C)	200
Pin soldering time (sec)	3.0

Optical and electrical characteristics (T=25°C):

Characteristics	Symbol	Test condition	Min	Typ.	Max	Units
Laser diode						
Pulse output power	P_{Pul}	$I=I_{Pul}, \tau_p=10 \mu s$	100			mW
Pulse operating current	I_{Pul}	$P=P_{Pul}$		500	700	mA
CW output power	P_{CW}	$I=I_{CW}$	5.5			mW
CW operating current	I_{CW}			30		mA
Operating voltage	U_{Pul}	$I=I_{Pul}, \tau_p=10 \mu s$		3.0	4.5	V
Wavelength	λ_{OP}	$I=I_{Pul}, \tau_p=10 \mu s$	1280	1310	1340	nm
Spectral width (FWHM)	$\Delta\lambda$	$I=I_{Pul}, \tau_p=10 \mu s$		7.0	10	nm
Threshold current	I_{TH}	CW		10	15	mA
Rise/fall time	τ_R/τ_F	P_{OP}		1.0	2.0	nsec
Optical fiber						
Fiber core/cladding diameter	D_C/D_{CL}			50/125		μm
Fiber length	L			400..1500		mm
Optical connector type				«FC»		

ROITHNER LASERTECHNIK

A-1040 VIENNA, SCHOENBRUNNER STRASSE 7, AUSTRIA


TEL: +43 -1- 586 52 43-0 FAX: +43 -1- 586 52 43-44

e-mail: office@roithner-laser.com <http://www.roithner-laser.com>

LFO-27-ip


Package specifications (type «A»):

Pin	Function
1	-
2	-
3	LD anode (+), case
4	LD cathode (-)

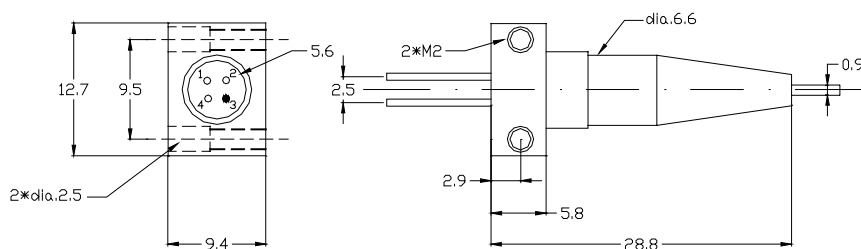


Package specifications (type «B»):

Pin	Function
1	-
2	-
3	LD anode (+), case
4	LD cathode (-)

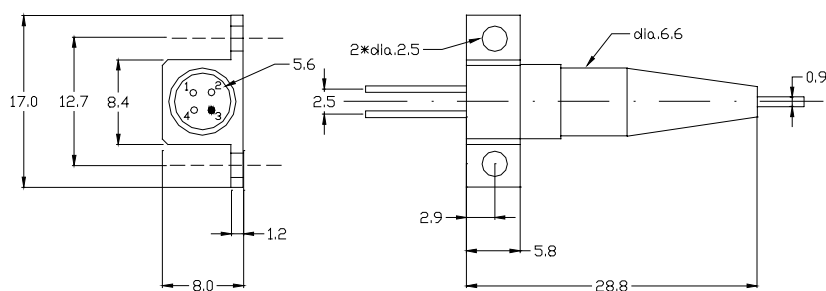

Package specifications (type «C»):

Pin	Function
1	-
2	-
3	LD anode (+), case
4	LD cathode (-)

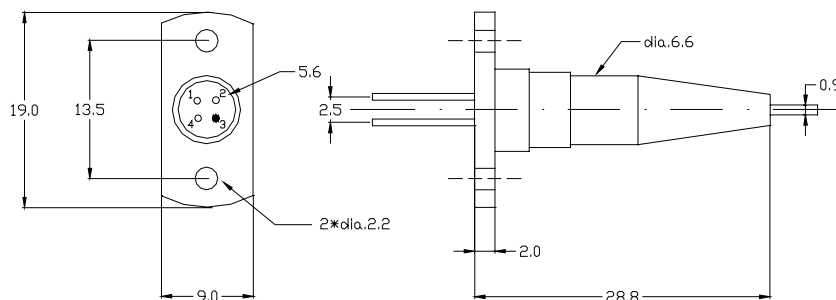

ROITHNER LASERTECHNIK

A-1040 VIENNA, SCHOENBRUNNER STRASSE 7, AUSTRIA

TEL: +43 -1- 586 52 43-0 FAX: +43 -1- 586 52 43-44

e-mail: office@roithner-laser.com <http://www.roithner-laser.com>