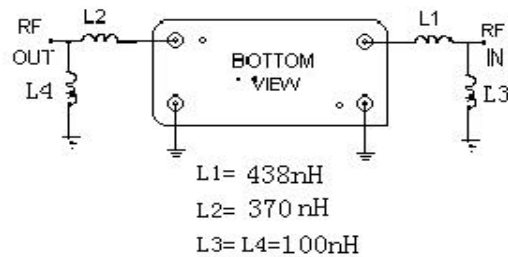






SAW FILTER P/N: LB70A8**A. Electrical Characteristic :**

Parameter	Unit	Minimum	Typical	Maximum
Center Frequency	MHz	69.91	70	70.09
Insertion Loss	dB		23.8	26
1 dB Bandwidth	MHz	2.5	2.7	
3 dB Bandwidth	MHz	3	3.1	
40dB Bandwidth	MHz		4.6	4.9
Passband variation	dB		0.45	0.8
Phase Linearity	degrees		2	8
Group Delay Variation	nsec		45	90
Absolute Delay	usec		2.7	
Ultimate Rejection	dB	50	60	
Substrate Material		Quartz		
Ambient Temperature	°C	25		
Package Size		6/14 (22.2x12.6x5.2mm ³)		

B. Mechanical Drawing**Matching configuration****C. Typical Performance**

Prepared :Luo Ming Li

Approved: Xu Wenbing

Date :2001/04/30

Drawing no.: Saw Filter

REV.:A0

Page : 1/1