



LM385/LM385B-2.5

MICROPOWER VOLTAGE REFERENCE DIODE

SPEC NO: DS-385C-00 03/21/00


■ FEATURES

- Operating Current of $20\mu A$ to $20mA$.
- Low Temperature Coefficient.
- 1% and 2% Initial Tolerance.
- Low Dynamic Impedance.

■ APPLICATIONS

- Portable, Battery-Powered Equipment.
- Instrumentation.
- Process Control.
- Energy Management.
- Product Testing.
- Automotive.
- Precision Audio Components.

■ TYPICAL APPLICATION CIRCUITS

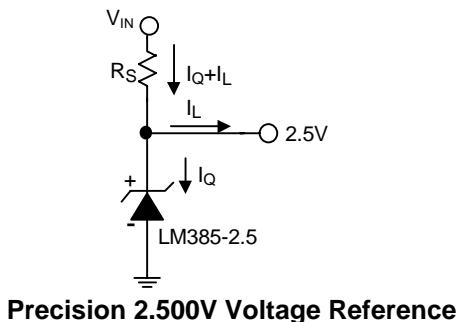

■ DESCRIPTION

The LM385-2.5 is a micropower 2-terminal bandgap voltage regulator diode. Operating over a $20\mu A$ to $20mA$ current range, it features exceptionally low dynamic impedance and good temperature stability. On-chip trimming is used to achieve tight voltage tolerance. Since the LM385-2.5 bandgap reference uses only transistors and resistors, low noise and good long term stability result.

Careful design of the LM385-2.5 has made the device exceptionally tolerant of capacitive loading, making it easy to use in almost any reference application. The wide dynamic operating range allows for its use with widely varying supplies with excellent regulation.

The extremely low power drain of the LM385-2.5 makes it useful for micropower circuitry. This voltage reference can be used to make portable meters, regulators, or general purpose analog circuitry with battery life approaching shelf life. Further, the wide operating current allows it to replace older references with a tighter tolerance.




LM385/LM385B-2.5

MICROPOWER VOLTAGE REFERENCE DIODE

SPEC NO: DS-385C-00 03/21/00

■ ORDERING INFORMATION

LM385X-2.5XX

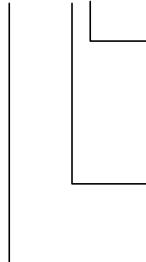

PACKAGE TYPE
S: SMALL OUTLINE
U: SOT-23
X: SOT-89
Z: TO-92

TEMPERATURE RANGE
 $C=0^{\circ}\text{C} \sim +70^{\circ}\text{C}$

TOLERANCE
B: 1%
Default: 2%

ORDER NUMBER	PIN CONFIGURATION
LM385B-2.5CS LM385 -2.5CS (PLASTIC SO)	TOP VIEW
LM385B-2.5CU LM385 -2.5CU (SOT-23)	FRONT VIEW 1: - 2: + 3: NC
LM385B-2.5CX LM385 -2.5CX (SOT-89)	FRONT VIEW 1: NC 2: - 3: +
LM385B-2.5CZ LM385 -2.5CZ (TO-92)	TOP VIEW 1: NC 2: + 3: -

■ ABSOLUTE MAXIMUM RATINGS

Reverse Current 30mA

Forward Current 10mA

Operating Temperature Range. 0°C to 70°C

Storage Temperature -65°C to 150°C

Lead Temperature

TO-92 Package Soldering (10 seconds) 260°C

SO Package Vapor phase (60 seconds) 215°C

■ TEST CIRCUIT

Refer to TYPICAL APPLICATION CIRCUIT.



LM385/LM385B-2.5

MICROPOWER VOLTAGE REFERENCE DIODE



SPEC NO: DS-385C-00

ELECTRICAL CHARACTERISTICS ($T_a=25^\circ C$, unless otherwise specified.)

PARAMETER	TEST CONDITIONS	SYMBOL	MIN.	TYP.	MAX.	UNIT
Reverse Breakdown Voltage	$I_R=100\mu A$ LM385B-2.5 LM385-2.5	V_R	2.475 2.450	2.500 2.500	2.525 2.550	V
Reverse Breakdown Voltage Change with Current	$20\mu A \leq I_R \leq 1mA$	ΔV_R			2	mV
	$1mA \leq I_R \leq 20mA$	ΔV_R			20	mV
Reverse Dynamic Impedance	$I_R=100\mu A, f=20Hz$	Z_R			1	Ω
Minimum Operating Current		I_{RMIN}		13	20	μA
Wideband Noise (rms)	$I_R=100\mu A,$ $10Hz \leq f \leq 10KHz$	e_N		120		μV_{rms}
Average Temperature Coefficient (Note)	$I_R=100\mu A$	αV_R		100		$ppm/\text{ }^\circ C$
Long Term Stability	$I_R=100\mu A, T=1000Hrs,$ $T_A=25^\circ C$	$\Delta V_R / \Delta t$		20		ppm

Note : The average temperature coefficient is defined as the maximum deviation of reverse breakdown voltage at all measured temperatures from T_{MIN} to T_{MAX} , divided by $T_{MAX} - T_{MIN}$. The measured temperature are $0^\circ C$, $25^\circ C$, $50^\circ C$ and $70^\circ C$.

TYPICAL PERFORMANCE CHARACTERISTICS

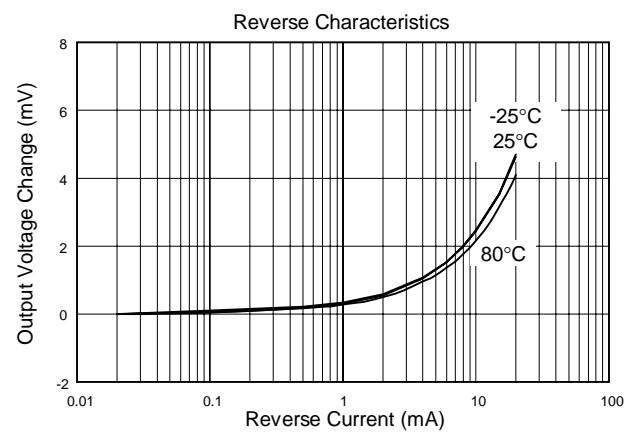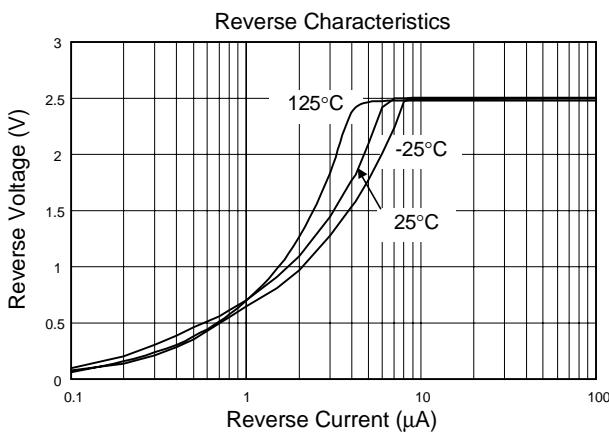








LM385/LM385B-2.5

MICROPOWER VOLTAGE REFERENCE DIODE

SPEC NO: DS-385C-00

■ TYPICAL PERFORMANCE CHARACTERISTICS (CONTINUED)

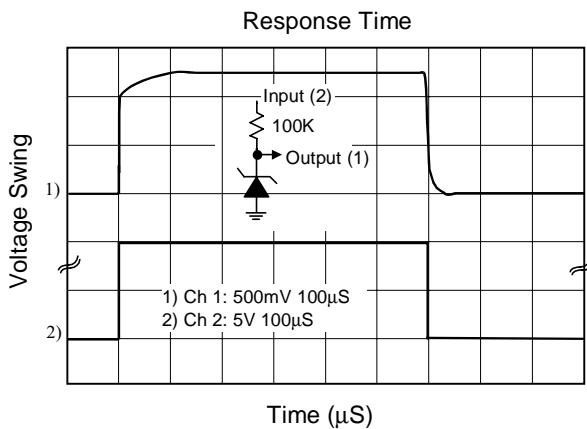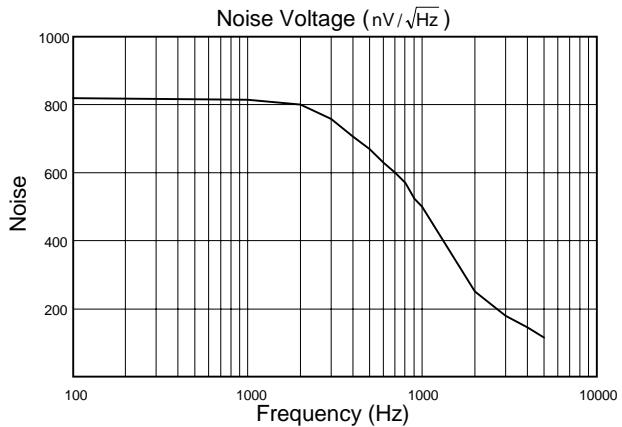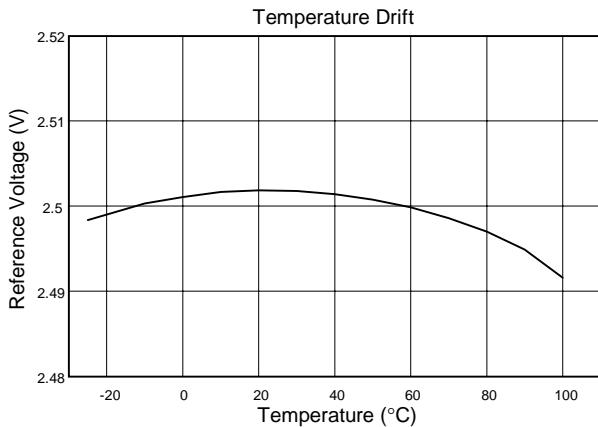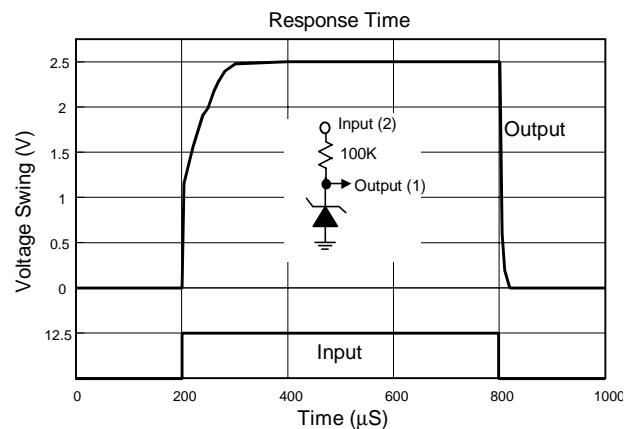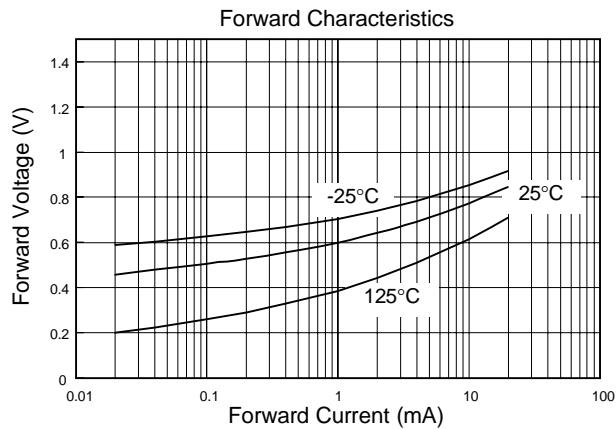




LM385/LM385B-2.5


MICROPOWER VOLTAGE REFERENCE DIODE

SPEC NO: DS-385C-00


■ BLOCK DIAGRAM

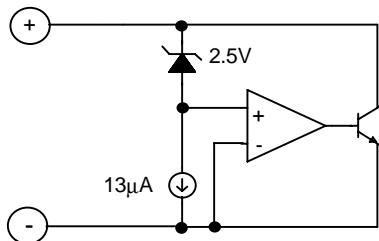

■ SYMBOL




■ APPLICATION EXAMPLES

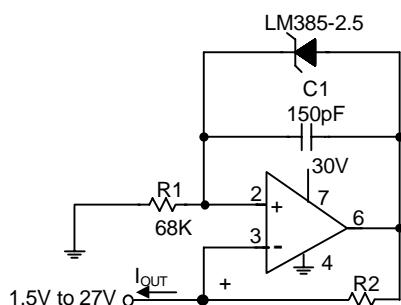

$$I_{OUT} = \frac{2.5V}{R_2}$$


Precision 1µA to 1mA Current Source

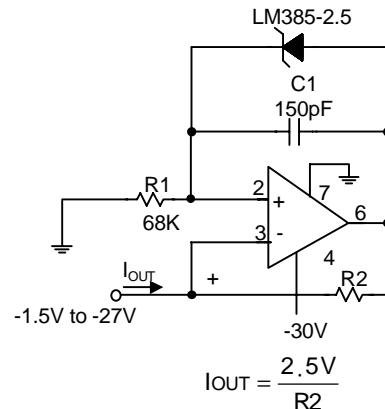

$$I_{OUT} = \frac{2.5V}{R_2}$$

■ PHYSICAL DIMENSIONS

- 8 LEAD PLASTIC SO (unit: mm)

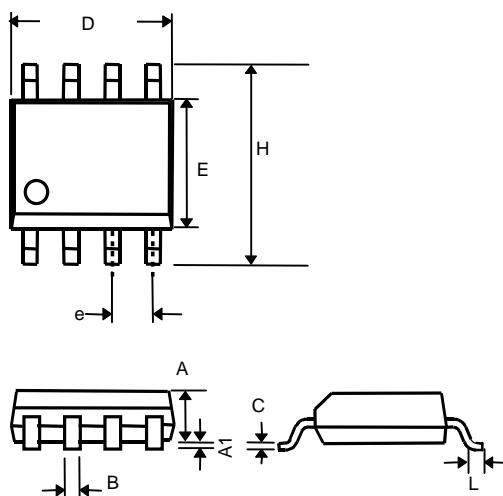

SYMBOL	MIN	MAX
A	1.35	1.75
A1	0.10	0.25
B	0.33	0.51
C	0.19	0.25
D	4.80	5.00
E	3.80	4.00
e	1.27(TYP)	
H	5.80	6.20
L	0.40	1.27




LM385/LM385B-2.5

MICROPOWER VOLTAGE REFERENCE DIODE

SPEC NO: DS-385C-00

● SOT-23 (unit: mm)

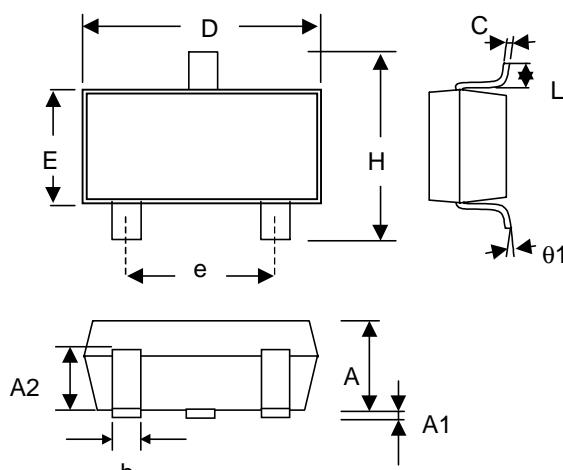


SYMBOL	MIN	MAX
A	1.00	1.30
A1	—	0.10
A2	0.70	0.90
b	0.35	0.50
C	0.10	0.25
D	2.70	3.10
E	1.40	1.80
e	1.90 (TYP)	—
H	2.60	3.00
L	0.37	—
$\theta 1$	1°	9°

● SOT-23 MARKING

Part No.	Marking
LM385-25CU	AIA2
LM385B-25CU	AIB2

● SOT-89 (unit: mm)

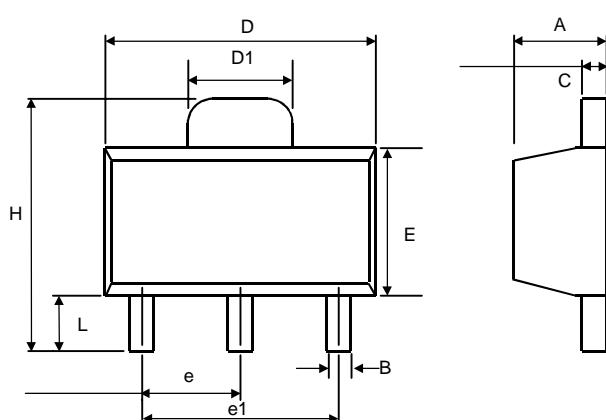


SYMBOL	MIN	MAX
A	1.40	1.60
B	0.36	0.48
C	0.35	0.44
D	4.40	4.60
D1	1.62	1.83
E	2.29	2.60
e	1.50 (TYP.)	—
e1	3.00 (TYP.)	—
H	3.94	4.25
L	0.89	1.20



LM385/LM385B-2.5
MICROPOWER VOLTAGE REFERENCE DIODE

SPEC NO: DS-385C-00

● TO-92 (unit: mm)

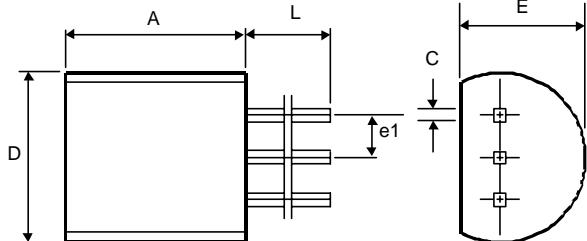

SYMBOL	MIN	MAX
A	4.32	5.33
C	0.38 (TYP.)	
D	4.40	5.20
E	3.17	4.20
e1	1.27 (TYP.)	
L	12.7	-