

17W CW Lensed Laser Diode Array
Part Number: LAR31C017

W2 PACKAGE

- Packaged Laser Diode Array
- Available With Any Silver Bullet™ Configuration
- Silver Bullet™ Can Be Mounted P-Side Up Or P-Side Down
- Available Wavelengths 785-1064nm



**OPTICAL
CHARACTERISTICS**

PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
CW Power Output	32A at 25°C Heat Sink ⁽¹⁾	17	---	---	W
Operating Current	17W at 25°C Heat Sink	---	28	32	A
Threshold Current	25°C Heat Sink	---	7.5	9.0	A
Slope Efficiency	25°C Heat Sink	0.9	1.1	---	W/A
Efficiency	17W at 25°C Heat Sink	35	42	---	%
Number of Emitters	---	---	46	---	
Emitter Size	---	---	80 x 1	---	µm
Emitter Pitch	---	---	200	---	µm
Center Wavelength	17W at 25°C Heat Sink	792	808	812	nm
Wavelength Tolerance	17W at 25°C Heat Sink	± 1	± 3	± 4	nm
Spectral Width	17W at 25°C Heat Sink	---	1.9	2.5	nm
Wavelength Shift	---	0.23	0.25	0.27	nm/°C
Beam Divergence FWHM ⁽¹⁾	---	---	1x10	---	° x °
Polarization	---	---	TE	---	---
Degradation Rate ⁽²⁾	25°C Heat Sink	---	3	---	%/kHr

**ELECTRICAL
CHARACTERISTICS**

PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
Built-in Voltage	25°C Heat Sink	---	1.6	1.7	V
Series Resistance	25°C Heat Sink	---	0.005	0.012	ohms
Operating Voltage	25°C Heat Sink, 17W	---	1.8	2.1	V

U.S. Patent Numbers: 5,734,672 5,913,108

NOTES

(1) Lower beam divergence is also available.


(2) Typical degradation rates are 5% in the first 100 hours and 3% per 1,000 hours thereafter.

ABSOLUTE MAXIMUM RATINGS

PARAMETER	CONDITIONS
Forward Current	35A
Reverse Current	25 μ A
Reverse Voltage	3V
Operating Temperature Range ⁽³⁾	-20°C to 50°C
Storage Temperature Range	-40°C to 85°C


MECHANICAL CHARACTERISTICS

PARAMETER	DIMENSION
Package Length	0.98 \pm 0.01 inches
Package Width	0.83 \pm 0.01 inches
Package Height	0.33 \pm 0.01 inches
Package Thermal Resistance	< 0.8°C/W

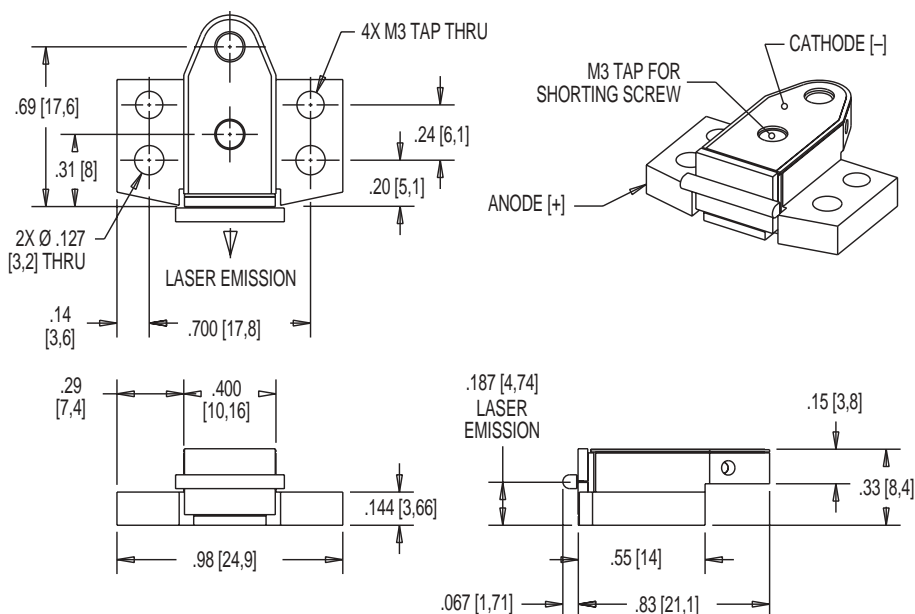

NOTES

- (3) A dry nitrogen environment should be provided by the user when storing and operating at temperatures below ambient dew point.



Copyright © 2000 Cutting Edge Optonics.
All Rights Reserved.

Cutting Edge Optonics reserves the right to change product design and specification at any time without notice.

No license is granted by implication or otherwise under any patents or patent rights of Cutting Edge Optonics or others.

No responsibility is assumed for the use of these products, nor for any infringement on the rights of others resulting from the use of these products.

Laser diode product components are intended for use in a user-devised end system. However, these products are capable of emitting Class IV radiation. Extreme care must be exercised during their operation. Only persons familiar with the appropriate safety precautions should operate a laser product. Directly viewing the laser beam or exposure to specular reflections must be avoided. Serious injury may result if any part of the body is exposed to the beam. The eye is extremely sensitive to the infrared radiation and therefore, proper eye-wear must be worn at all times. Use of optical instruments with these products may increase eye hazard. Always wear proper eye protection when operating.