

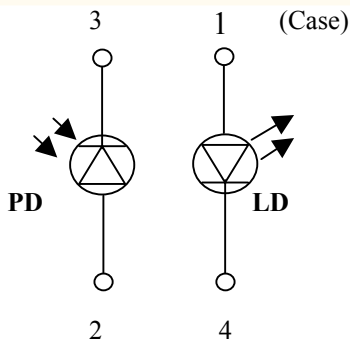


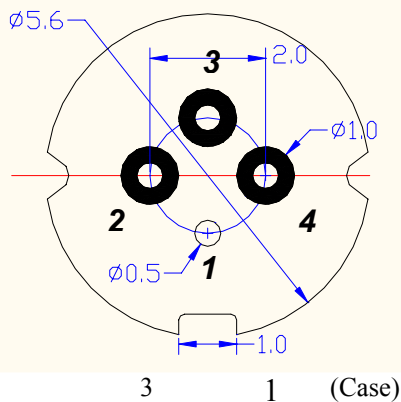

VCSEL/LD Division

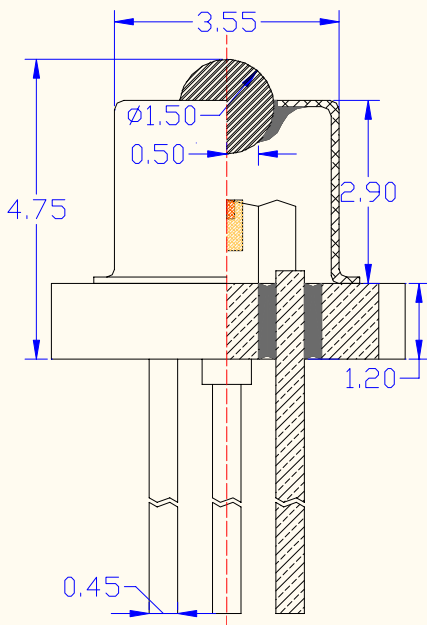

1310nm FPEEL in To-56 Package

1. Feature:

- Ball lens Package
- Low Threshold Current
- Modulation Capability up to 1.25Gbps
- Wide Operating Temperature Range: -40°C to +85°C

2. Application:

- Fiber Channel
- Gigabit Ethernet
- ATM transceiver modules and system
- High-speed data communications and telecommunications applications

3. Part Number: **LB-TMSF-5BA0**

4. Optical and Electrical Characteristics

Parameter	Symbol	Min.	TYP.	Max.	Unit	Test Condition
Threshold Current	I_{th}		10	15	mA	CW. $\frac{1}{2}$ (dP/dI) peak
Operation Current	I_{op}		25	32	mA	CW. $P_0=5mW$
Operation Voltage	V_{op}		1.15	1.5	V	CW. $P_0=5mW$
Slope Efficiency	η	0.25	0.32		W/A	CW. $P_0=5mW$
Center Wavelength	λ_c	1290	1310	1330	nm	CW. $P_0=5mW$
Spectra Width	$\Delta\lambda$		1.0	3.0	nm	CW. $P_0=5mW$ (FWHM)
Beam Divergence (Full width at half max)	$\theta_{tr} / \theta_{tf}$		50	100	ps	CW. $P_0=5mW$ (parallel)
Beam Divergence (Full width at half max)	$\theta_{ }$		8		deg	CW. $P_0=5mW$ (perpendicular)
Monitor Output Current (PD)	$\theta_{\perp}$		15		deg	CW. $P_0=5mW$ VRD=1V RL=10 Ω
Rise / Fall Time	I_m	0.1	0.3		mA	20~80%
Dark Current (PD)	I_d			0.1	uA	VRD=10V
Capacitance (PD)	C_t		10	20	pf	VRD=10V f=1MHz

5. Maximum Ratings

Parameter	SYMBOL	Min.	Max.	Unit
Optical Output Power	P_0	-	7	mW
Reverse Voltage (LD)	V_{RL}	-	2	V
Reverse Voltage (PD)	V_{RD}	-	20	V
Forward Current (PD)	I_{FD}	-	2	mA
Case Temperature	T_o	-40	+85	°C
Storage Temperature	T_{STG}	-40	+125	°C

Note. These specifications are subject to change without notice.

Tel: 323-278-0820

Website: www.axt.com/vcsl

Fax: 323-278-0096

Email: vcsl@axt.com