

L1060ID HIGH EFFICIENCY RED      L1060GD GREEN  
 L1060ED ORANGE                      L1060YD YELLOW  
 L1060SRx SUPER BRIGHT RED

### Features

- 1.8mm DIAMETER SMALL SIZE LED LAMP.
- ULTRA BRIGHTNESS IS AVAILABLE.
- VERSATILE MOUNTING ON P.C. BOARD OR PANEL.
- RELIABLE AND RUGGED.
- AVAILABLE IN DIFFUSED AND WATER CLEAR LENS.

### Description


The High Efficiency Red and Orange source color devices are made with Gallium Arsenide Phosphide on Gallium Phosphide Orange Light Emitting Diode.

The Green source color devices are made with Gallium Phosphide Green Light Emitting Diode.

The Yellow source color devices are made with Gallium Arsenide Phosphide on Gallium Phosphide Yellow Light Emitting Diode.

The Super Bright Red source color devices are made with Gallium Aluminum Arsenide Red Light Emitting Diode.

### Package Dimensions

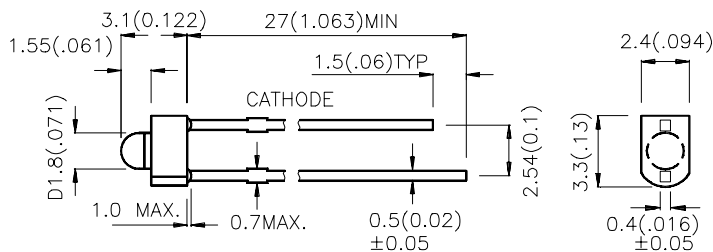

#### Notes:

1. All dimensions are in millimeters (inches).
2. Tolerance is  $\pm 0.25$  (0.01") unless otherwise noted.
3. Lead spacing is measured where the lead emerge package.
4. Specifications are subject to change without notice.

## Selection Guide

| Part No. | Dice                            | Lens Type       | Iv (mcd)<br>@ 10 mA *20 mA |      | Viewing<br>Angle |
|----------|---------------------------------|-----------------|----------------------------|------|------------------|
|          |                                 |                 | Min.                       | Typ. | 2θ1/2            |
| L1060ID  | HIGH EFFICIENCY RED (GaAsP/GaP) | RED DIFFUSED    | 8                          | 15   | 70°              |
| L1060ED  | ORANGE (GaAsP/GaP)              | ORANGE DIFFUSED | 8                          | 15   | 70°              |
| L1060GD  | GREEN (GaP)                     | GREEN DIFFUSED  | 5                          | 10   | 70°              |
| L1060YD  | YELLOW (GaAsP/GaP)              | YELLOW DIFFUSED | 5                          | 8    | 70°              |
| L1060SRD | SUPER BRIGHT RED (GaAlAs)       | RED DIFFUSED    | *70                        | *200 | 70°              |
| L1060SRC |                                 | WATER CLEAR     | *100                       | *300 | 30°              |

### Notes:

1. θ1/2 is the angle from optical centerline where the luminous intensity is 1/2 the optical centerline value.
2. \* Luminous intensity with asterisk is measured at 20mA.

## Electrical / Optical Characteristics at T<sub>A</sub>=25°C


| Symbol            | Parameter               | Device                                                               | Typ.                             | Max.                            | Units | Test Conditions |
|-------------------|-------------------------|----------------------------------------------------------------------|----------------------------------|---------------------------------|-------|-----------------|
| λ <sub>peak</sub> | Peak Wavelength         | High Efficiency Red<br>Orange<br>Green<br>Yellow<br>Super Bright Red | 627<br>627<br>565<br>590<br>660  |                                 | nm    | IF=20mA         |
| λ <sub>D</sub>    | Dominate Wavelength     | High Efficiency Red<br>Orange<br>Green<br>Yellow<br>Super Bright Red | 625<br>625<br>568<br>588<br>640  |                                 | nm    | IF=20mA         |
| Δλ <sub>1/2</sub> | Spectral Line Halfwidth | High Efficiency Red<br>Orange<br>Green<br>Yellow<br>Super Bright Red | 45<br>45<br>30<br>35<br>20       |                                 | nm    | IF=20mA         |
| C                 | Capacitance             | High Efficiency Red<br>Orange<br>Green<br>Yellow<br>Super Bright Red | 15<br>15<br>15<br>20<br>45       |                                 | pF    | VF=0V;f=1MHz    |
| V <sub>F</sub>    | Forward Voltage         | High Efficiency Red<br>Orange<br>Green<br>Yellow<br>Super Bright Red | 2.0<br>2.0<br>2.2<br>2.1<br>1.85 | 2.5<br>2.5<br>2.5<br>2.5<br>2.5 | V     | IF=20mA         |
| I <sub>R</sub>    | Reverse Current         | All                                                                  |                                  | 10                              | uA    | VR = 5V         |

## Absolute Maximum Ratings at $T_A=25^\circ\text{C}$





| Parameter                     | High Efficiency Red                        | Orange | Green | Yellow | Super Bright Red | Units |
|-------------------------------|--------------------------------------------|--------|-------|--------|------------------|-------|
| Power dissipation             | 105                                        | 105    | 105   | 105    | 100              | mW    |
| DC Forward Current            | 30                                         | 30     | 25    | 30     | 30               | mA    |
| Peak Forward Current [1]      | 160                                        | 160    | 140   | 140    | 155              | mA    |
| Reverse Voltage               | 5                                          | 5      | 5     | 5      | 5                | V     |
| Operating/Storage Temperature | $-40^\circ\text{C}$ To $+85^\circ\text{C}$ |        |       |        |                  |       |
| Lead Solder Temperature [2]   | 260°C For 5 Seconds                        |        |       |        |                  |       |

Notes:





- 1/10 Duty Cycle, 0.1ms Pulse Width.
- 4mm below package base.

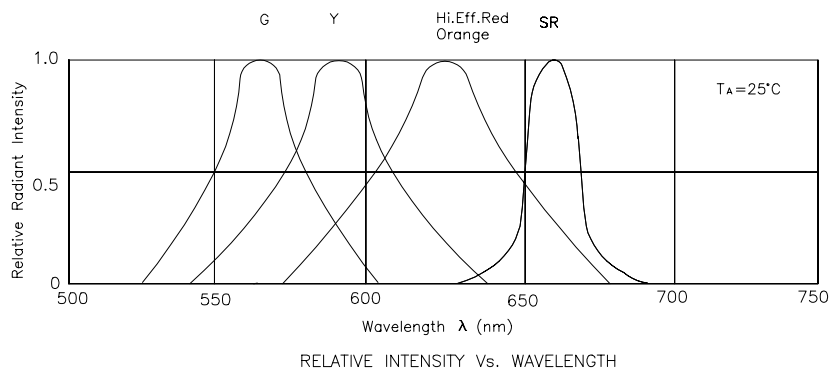





## High Efficiency Red L1060ID

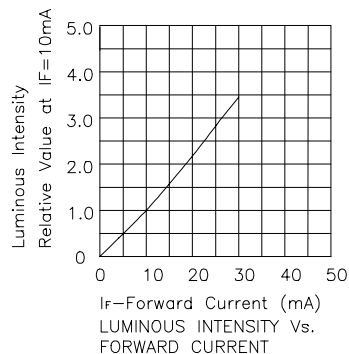





## Orange L1060ED



## Green L1060GD



## Yellow L1060YD



## Super Bright Red L1060SRD, L1060SRC

