


L2602

Dimming Option

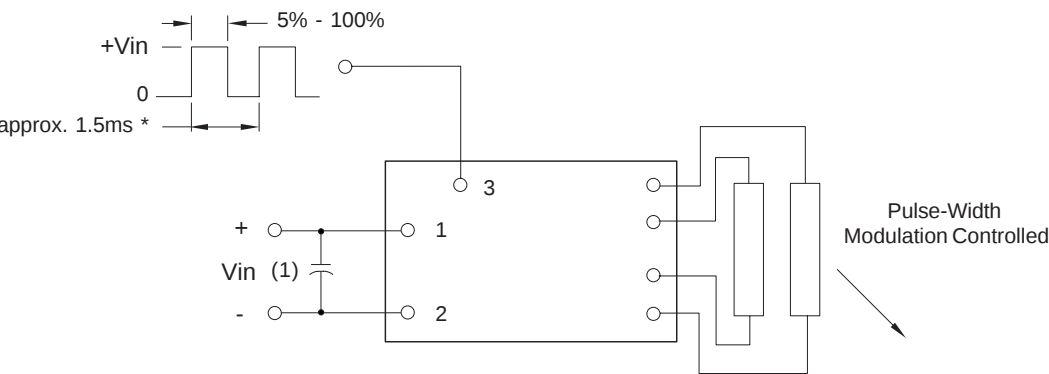

* should be selected to be compatible with LCD and display driver.

Note 1 Input by-pass capacitor (25uf - 100uf) may be required to reduce reflected ripple.



Endicott Research Group, Inc.
2601 Wayne St., Endicott NY 13760
607-754-9187



Endicott Research Group, Inc.
2601 Wayne St., Endicott NY 13760
607-754-9187 Fax 607-754-9255
<http://www.ergpower.com>

Specifications and Applications Information

12/19/01 Preliminary

The ERG L2602 (**8m Class**) low profile dc to ac inverter is specifically designed to power the Sharp LQ104V7DS01 LCD display module to a moderate brightness level from a +5 volt dc source.

This low profile inverter features:


- ✓ Less Than 8 mm in Height
- ✓ LCD Module Specific
- ✓ Display Compatible Output Connector
- ✓ Firm Specifications
- ✓ Application Information
- ✓ Designed, Manufactured and Supported in the USA
- ✓ Custom Input and Output Voltages
- ✓ Flexible System Interface
- ✓ Notebook Display Head Compatible

Pin Descriptions

Input Connector		Output Connectors	
MOLEX 22-05-3041		JST SM02(8.0)B-BHS1TB	
J2-1	Vin	J1-1	ACout
J2-2	GND	J1-4	Common
J2-3	Control	J3-1	ACout
J2-4	NC		
		J3-4	Common


L2602

8m Class
DC to AC Inverter



8m Package

Package Configuration

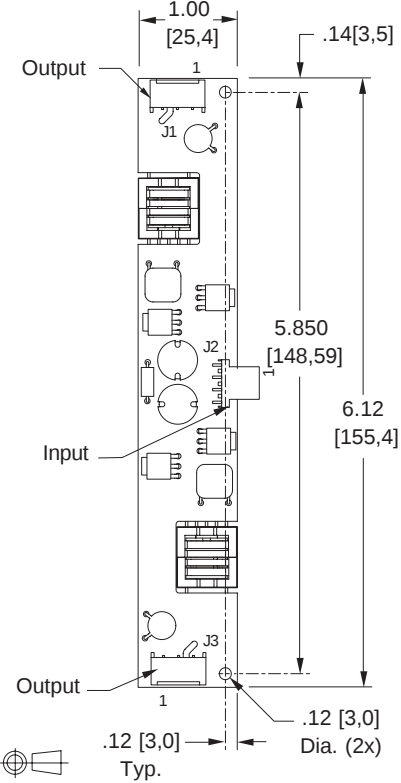

L2602

Absolute Maximum Ratings

Rating	Symbol	Value	Units
Input Voltage Range	Vin	-0.3 to +5.5	Vdc
Operating Temperature	To	-0 to +70	°C
Storage Temperature	Tstg	-40 to +85	°C

Absolute Maximum Ratings

Rating	Symbol	Value	Units
Input Voltage	Vin	+2.5 to 5.5	Vdc

Electrical Characteristics

Unless otherwise noted Vin = 5.00 Volts dc and Ta = 25°C

Characteristic	Symbol	Min	Typ	Max	Units
Input Current	lin	-	1.48	1.75	Adc
Operating Frequency	Fo	32	37	42	KHz
Minimum Output Voltage	Vout (min)	1250	-	-	Vrms
Efficiency	-	-	81	-	%
Output Current per CCFT	Iout	-	6	-	marms
Output Voltage (When powering a load simulating the referenced display)	Vout	-	500	-	Vrms
Pin3 Input Current Requirement	-	-	22	-	madc

After tube has been allowed to warm-up for 5 minutes
External Disable Circuit shown on page 3.



Specifications subject to change without notice.



Endicott Research Group, Inc.

Typical Performance Curves

L2602

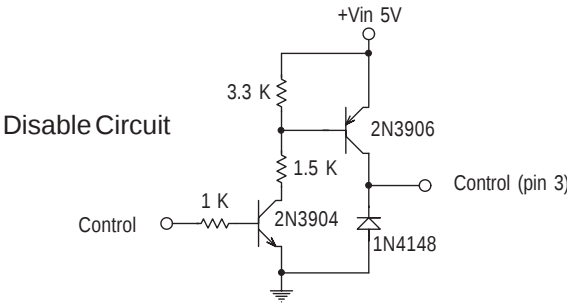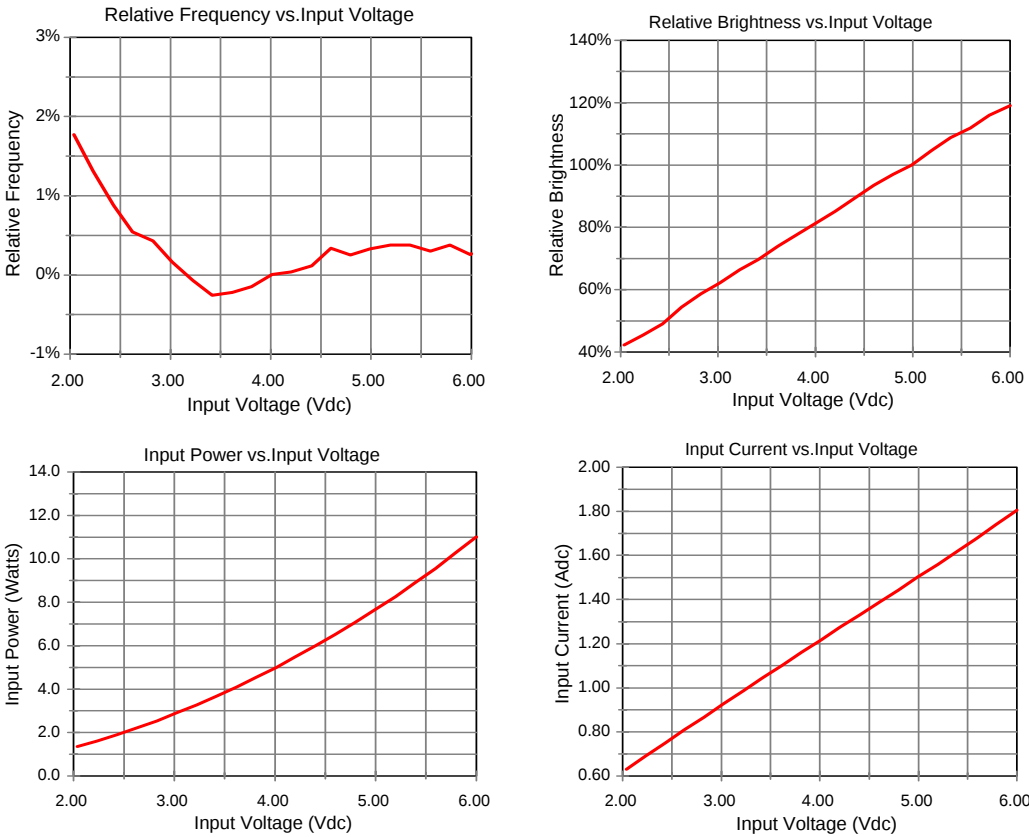

Endicott Research Group, Inc.