

power light source

Luxeon™ Ring


Technical Data DS22

Luxeon™ is a revolutionary, energy efficient and ultra compact new light source, combining the lifetime and reliability advantages of Light Emitting Diodes with the brightness of conventional lighting.

Luxeon features one or more power light sources mounted onto an aluminum-core printed circuit board, allowing for ease of assembly, optimum cooling and accurate light center positioning.

For high volume applications, custom Luxeon power light source designs are available upon request, to meet your specific needs.

Luxeon Power Light Sources give you total design freedom and unmatched brightness, creating a new world of light.



Luxeon Ring is available in white, green, cyan, blue, red, and amber.

Features


- Highest Flux per LED in the world
- Very long operating life (up to 100k hours)
- Available in white, green, cyan, blue, red and amber
- Highly efficient collimating optics provide tight beams
- More energy efficient than incandescent and most halogen lamps
- Low voltage DC operated
- Cool beam, safe to the touch
- Instant light (less than 100 ns)
- Fully dimmable
- No UV
- Superior ESD protection

Typical Applications


- Decorative lighting
- Architectural detail lighting
- Uplighters/Downlighters/Orientation lighting
- Entertainment lighting
- Bollards

Mechanical Dimensions

Ring with 6 LEDs

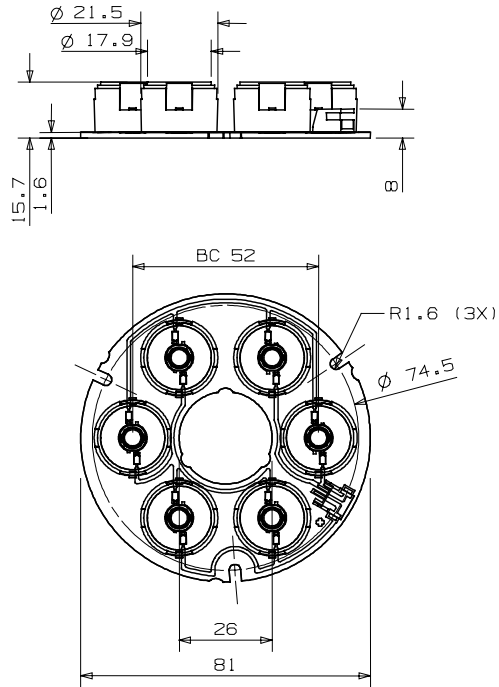

Ring with 12 LEDs

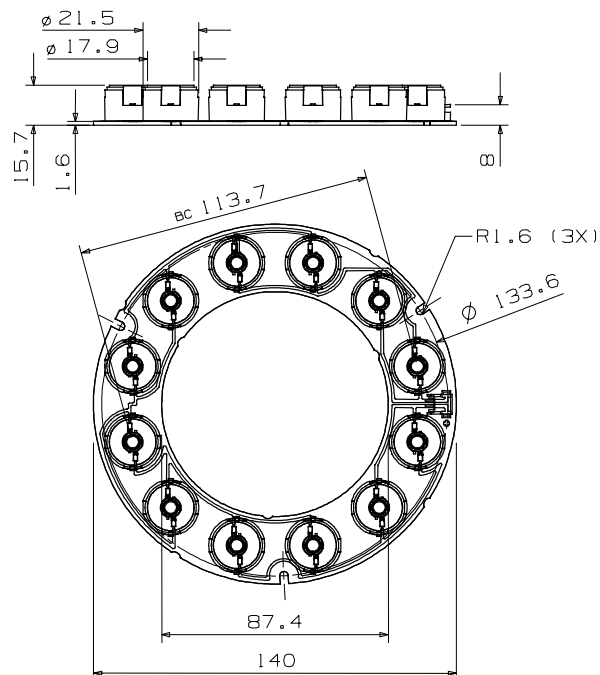


Notes:


1. Connector on board AMP type, code 2-179123-2; Mating connector – AMP receptacle housing assembly, code 173977-2
2. Slots in aluminum-core PCB for M3 or #4 mounting screw.
3. Drawing not to scale.
4. All dimensions are in millimeters.

Circuit Diagram

Ring with 12 LEDs

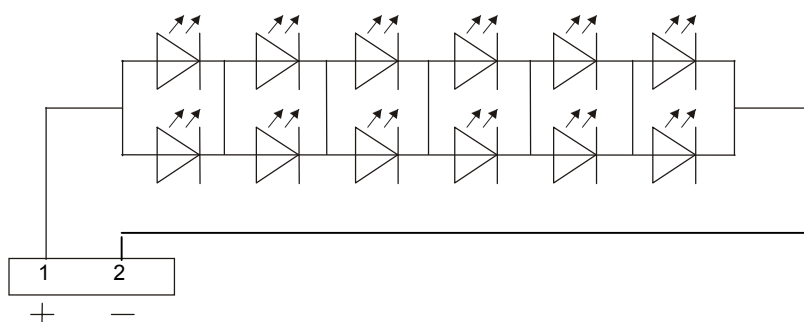

Ring with 6 LEDs

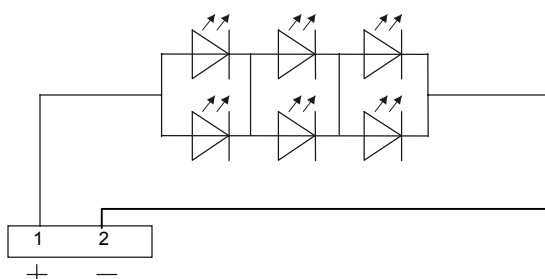

Flux Characteristics at 700mA, Junction Temperature, $T_J = 25^\circ\text{C}$

CONFIGURATION	COLOR	PART NUMBER	MINIMUM LUMINOUS FLUX (lm) $\Phi_V^{[1,2]}$	TYPICAL LUMINOUS FLUX (lm) $\Phi_V^{[2]}$
RING 12-UP	WHITE	LXHL-NW96	140	185
	GREEN	LXHL-NM96	140	255
	CYAN	LXHL-NE96	140	300
	BLUE ^[3]	LXHL-NB96	40	50
	RED	LXHL-ND92	310	450
	AMBER	LXHL-NL92	240	370
RING 6-UP	WHITE	LXHL-NW97	70	90
	GREEN	LXHL-NM97	70	130
	CYAN	LXHL-NE97	70	150
	BLUE ^[3]	LXHL-NB97	20	25
	RED	LXHL-ND93	155	225
	AMBER	LXHL-NL93	120	185

Notes:

1. Minimum luminous flux performance guaranteed within published operating conditions. Lumileds maintains a tolerance of +/-10% for luminous flux measurements.
2. Flux values for Luxeon Ring with optics. Luxeon types with even higher luminous flux levels will become available in the future. Please consult your Lumileds Authorized Distributor or Lumileds sales representative for more information.
3. Minimum flux value for 470 nm devices. Due to the CIE eye response curve in the short blue wavelength range, the minimum luminous flux will vary over the Lumileds' blue color range. Luminous flux will range from minimums of 30 lm for 12-Up and 15 lm for 6-Up Rings at 460nm to typicals of 80 lm for 12-Up and 40 lm for 6-Up Rings at 480nm due to this effect. Although the luminous power efficiency is lower in the short blue wavelength range, radiometric power efficiency increases as wavelength decreases. For more information, consult the Luxeon Design Guide, available upon request.

Optical Characteristics at 700mA, Junction Temperature, T_J = 25°C

COLOR	DOMINANT WAVELENGTH ^[1] λ _D OR COLOR TEMPERATURE ^[2] CCT			SPECTRAL HALF-WIDTH ^[3] (nm) Δλ _{1/2}	TEMPERATURE COEFFICIENT OF DOMINANT WAVELENGTH (nm/°C) Δλ _D / ΔT _J	VIEWING ANGLE PER LED ^[4] (DEGREES) 2θ 1/2	TYPICAL CANDELA ON AXIS PER LED ^[8] (Cd)
	MIN.	TYP.	MAX.				
WHITE	4500 K	5500 K	8000 K	---	---	10	180
GREEN	520 nm	530 nm	550 nm	35	0.04	10	500
CYAN	490 nm	505 nm	520 nm	30	0.04	10	600
BLUE	460 nm	470 nm	490 nm	25	0.04	10	100 ^[5]
RED	620.5 nm	627 nm	645 nm	20	0.05	10	660
AMBER	584.5 nm	590 nm	597 nm	14	0.09	10	540

Notes:

1. Dominant wavelength is derived from the CIE 1931 Chromaticity diagram and represents the perceived color.
2. CRI (Color Rendering Index) for White product is 70.
3. Spectral width at ½ of the peak intensity.
4. θ½ is the off axis angle from lamp centerline where the luminous intensity is ½ of the peak value.
5. Typical candela on axis per LED for 470 nm devices. Due to the CIE eye response curve in the short blue wavelength range, candela values will vary over the LumiLeds blue color range.
6. All red and amber products built with Aluminum Indium Gallium Phosphide (AlInGaP).
7. All white, green, cyan and blue products built with Indium Gallium Nitride (InGaN).
8. All power light sources represented here are IEC825 Class 2 for eye safety.

Electrical Characteristics at 700mA, Junction Temperature, T_J = 25°C

Ring 12-Up

COLOR	PART NUMBER	FORWARD VOLTAGE ^[1] (V) V _F			DYNAMIC RESISTANCE ^[2] (Ω) R _D	TEMP COEFFICIENT OF FORWARD VOLTAGE ^[3] (mV/°C) ΔV _F / ΔT _J	THERMAL RESISTANCE, JUNCTION TO BOARD ^[4] (°C/W) Rθ _{JB}
		MIN.	TYP.	MAX.			
WHITE	LXHL-NW96	16	21	24	3	-1.2	1.4
GREEN	LXHL-NM96	16	21	24	3	-1.2	1.4
CYAN	LXHL-NE96	16	21	24	3	-1.2	1.4
BLUE	LXHL-NB96	16	21	24	3	-1.2	1.4
RED	LXHL-ND92	14	18	21	7.2	-1.2	1.7
AMBER	LXHL-NL92	14	18	21	7.2	-1.2	1.7

Notes:

1. Lumileds maintains a tolerance of +/-0.06 Volts per LED for voltage measurements.
2. Dynamic resistance is the inverse of the slope in linear forward voltage model for LEDs. See *Figures 3a and 3b*.
3. Measured between 25°C ≤ T_J ≤ 110°C at I_F = 700mA.
4. To determine the junction temperature, multiply by total array power. For best optical and lifetime performance, additional heat sinking is required.

Ring 6-Up

COLOR	PART NUMBER	FORWARD VOLTAGE (V) V _F			DYNAMIC RESISTANCE ^[1] (Ω) R _D	TEMP COEFFICIENT OF FORWARD VOLTAGE ^[2] (mV/°C) ΔV _F / ΔT _J	THERMAL RESISTANCE, JUNCTION TO BOARD ^[3] (°C/W) Rθ _{JB}
		MIN.	TYP.	MAX.			
WHITE	LXHL-NW97	8	10	12	1.5	-6	2.8
GREEN	LXHL-NM97	8	10	12	1.5	-6	2.8
CYAN	LXHL-NE97	8	10	12	1.5	-6	2.8
BLUE	LXHL-NB97	8	10	12	1.5	-6	2.8
RED	LXHL-ND93	7	9	11	3.6	-6	3.3
AMBER	LXHL-NL93	7	9	11	3.6	-6	3.3

Absolute Maximum Ratings

PARAMETER	WHITE/GREEN/CYAN/BLUE	RED/AMBER
DC FORWARD CURRENT (mA) ^[1]	700	770
PEAK PULSED FORWARD CURRENT (mA)	1000	1100
AVERAGE FORWARD CURRENT (mA)	700	700
REVERSE VOLTAGE (V) ^[2]	> 5	> 5
LED JUNCTION TEMPERATURE (°C)	120	120
ALUMINUM-CORE PCB TEMPERATURE (°C)	105	105
STORAGE & OPERATING TEMPERATURE (°C)	-40 to +75	-40 to +75

Notes:

1. Proper current derating must be observed to maintain junction temperature below the maximum. For more information, consult Luxeon Design Guide, available upon request.
2. Measured at I_F = 100 μA. LEDs are not designed to be driven in reverse bias. All products are not sensitive to ESD damage (+/-16,000 Volts by HBM condition).

Wavelength Characteristics

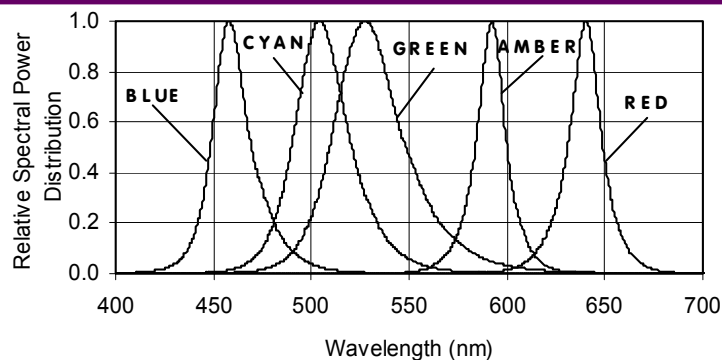


Figure 1a.
Relative Intensity vs. Wavelength

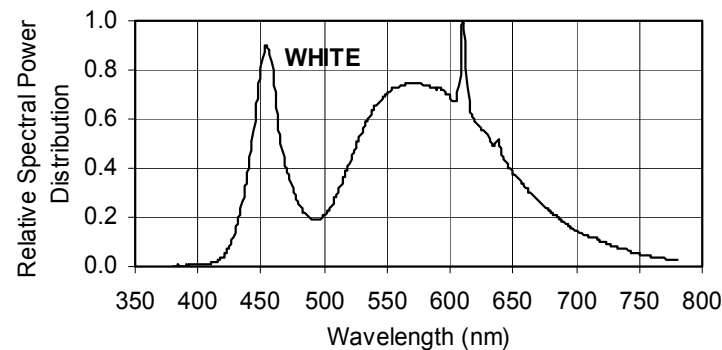


Figure 1b.
Relative Intensity vs. Wavelength

Light Output Characteristics

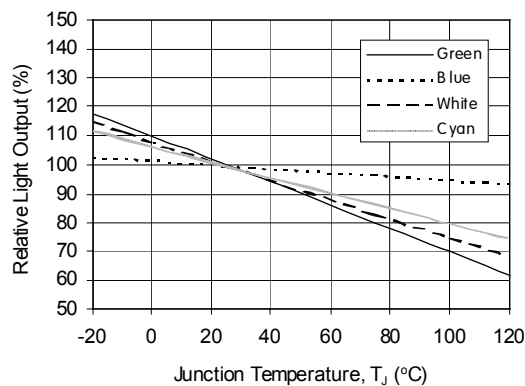


Figure 2a. Relative Light Output vs.
Junction Temperature for White, Green,
Cyan and Blue.

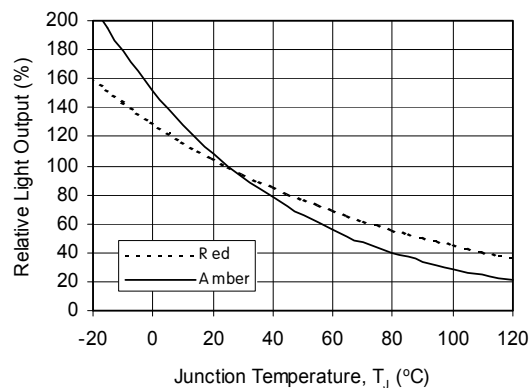


Figure 2b. Relative Light Output vs.
Junction Temperature for Red and
Amber.

Forward Current Characteristics, $T_J = 25^\circ\text{C}$

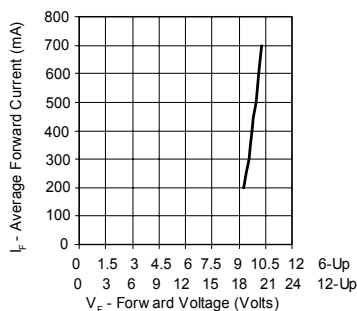


Figure 3a. Forward Current vs. Forward Voltage for White, Green, Cyan and Blue.

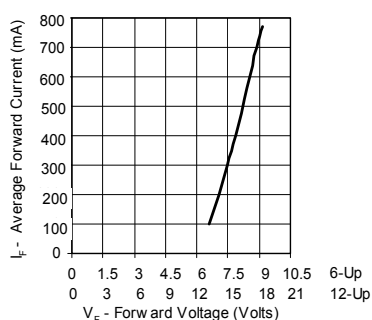


Figure 3b. Forward Current vs. Forward Voltage for Red and Amber.




Figure 4a. Relative Luminous Flux vs. Forward Current for White, Green, Cyan and Blue at $T_J = 25^\circ\text{C}$ maintained.




Figure 4b. Relative Luminous Flux vs. Forward Current for Red and Amber at $T_J = 25^\circ\text{C}$ maintained.

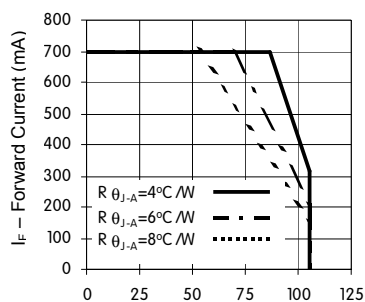


Figure 5a. Maximum Forward Current vs. Ambient Temperature. Derating based on $T_{JMAX} = 120^\circ\text{C}$ for White, Green, Cyan and Blue 6-Up Ring.

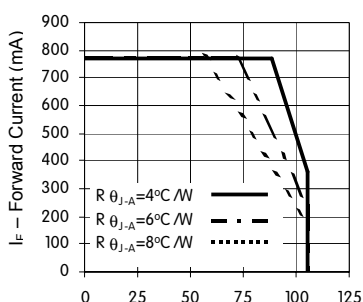


Figure 5b. Maximum Forward Current vs. Ambient Temperature. Derating based on $T_{JMAX} = 120^\circ\text{C}$ for Red and Amber 6-Up Ring.

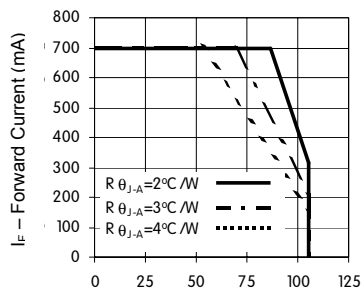


Figure 6a. Maximum Forward Current vs. Ambient Temperature. Derating based on $T_{JMAX} = 120^\circ\text{C}$ for White, Green, Cyan and Blue 12-Up Ring.

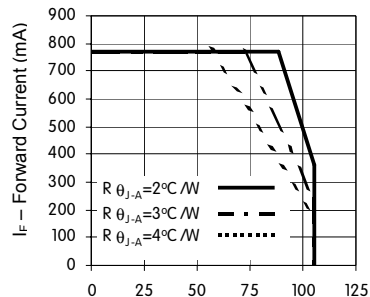


Figure 6b. Maximum Forward Current vs. Ambient Temperature. Derating based on $T_{JMAX} = 120^\circ\text{C}$ for Red and Amber 12-Up Ring.

Note:

Driving these high power devices at currents less than the test conditions may produce unpredictable results and may be subject to variation in performance. Pulse width modulation is recommended for dimming effects.

Representative Spatial Radiation Pattern

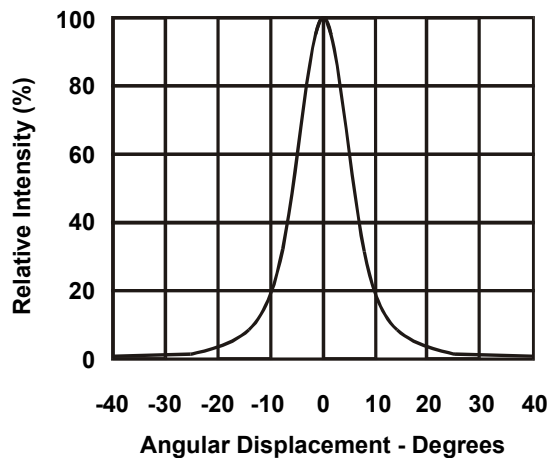


Figure 7. Representative Spatial Radiation Pattern for one Luxeon LED with optics, all colors.

Note:
For more detailed technical information regarding Luxeon radiation patterns, please consult your Lumileds Authorized Distributor or Lumileds sales representative.

Average Lumen Maintenance Characteristics

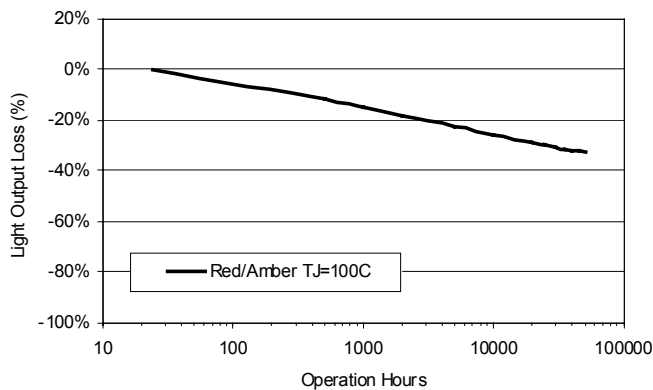


Figure 8. Light Output vs. Time for Red and Amber at I_F 385mA per LED (770mA for Ring).

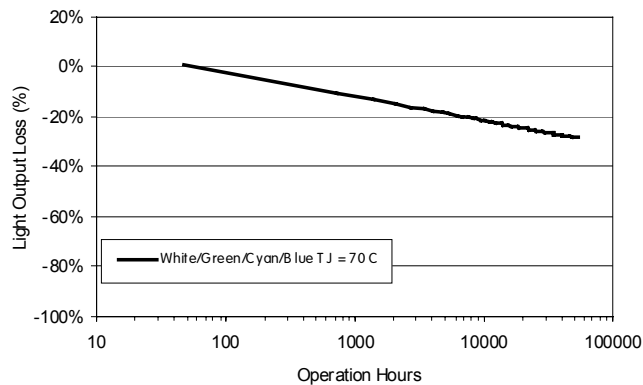


Figure 9. Light Output vs. Time for White, Green, Cyan and Blue at I_F 350mA per LED (700mA for Ring), relative humidity less than 20%.

About Luxeon



Luxeon is the new world of solid state lighting (LED) technology. Luxeon Power Light Source Solutions offer huge advantages over conventional lighting and huge advantages over other LED solutions. Luxeon enables partners to create and market products that, until now, were impossible to create. This means the opportunity to create products with a clear competitive advantage in the market. Products that are smaller, lighter, sleeker, cooler, and brighter. Products that are more fun to use, more efficient, and more environmentally conscious than ever before possible!



Company Information

Luxeon is developed, manufactured and marketed by Lumileds Lighting, LLC. Lumileds is a world-class supplier of Light Emitting Diodes (LEDs) producing billions of LEDs annually. Lumileds is a fully integrated supplier, producing core LED material in all three base colors (Red, Green, Blue) and White. Lumileds has R&D development centers in San Jose, California and Best, The Netherlands. Production capabilities in San Jose, California and Malaysia.

Lumileds is pioneering the high-flux LED technology and bridging the gap between solid state LED technology and the lighting world. Lumileds is absolutely dedicated to bringing the best and brightest LED technology to enable new applications and markets in the Lighting world.



©2002 Lumileds Lighting. All rights reserved. Lumileds Lighting is a joint venture between Agilent Technologies and Philips Lighting. Luxeon is a trademark of Lumileds Lighting, Inc. Product specifications are subject to change without notice.
Document DS22 (April 2002)

Lumileds may make process or materials changes affecting the performance or other characteristics of Luxeon. These products supplied after such change will continue to meet published specifications, but may not be identical to products supplied as samples or under prior orders.

LUMILEDS

www.luxeon.com
www.lumileds.com

For technical assistance or the location of your nearest Lumileds sales office, call:

Worldwide:
+1 408-435-6044
US Toll free: 877-298-9455
Europe: +31 499 339 439
Fax: 408-435-6855
Email us at info@lumileds.com

Lumileds Lighting, LLC
370 West Trimble Road
San Jose, CA 95131