


LITEON LITE-ON TECHNOLOGY CORPORATION

Property of LITON Only

FEATURES

- * SNAP MOUNTING.
- * MECHANICAL SWITCH REPLACEMENT.
- * THREE WIRES FOR ELECTRICAL CONNECTION.
- * GUARANTEED ACTUATOR LIFE 10^6 TIMES.

PACKAGE DIMENSIONS

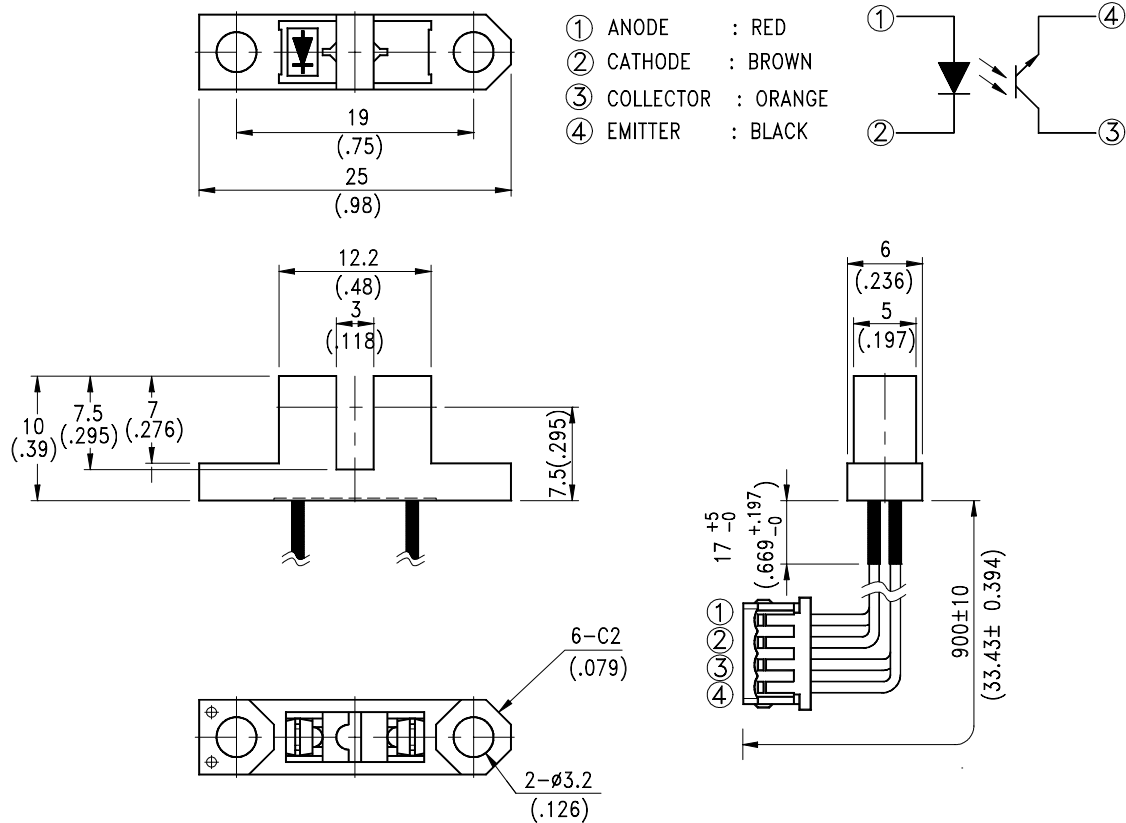

NOTES:

1. All dimensions are in millimeters (inches).
2. Tolerance is $\pm 0.25\text{mm}$ (.010") unless otherwise noted.



LITE-ON TECHNOLOGY CORPORATION

Property of LITON Only

ABSOLUTE MAXIMUM RATINGS AT TA=25

PARAMETER	MAXIMUM RATING	UNIT
INPUT LED		
Power Dissipation	75	mW
Peak Forward Current (300 pps , 10 μ S pulse)	1	A
Continuous Forward Current	50	mA
Reverse Voltage	5	V
OUTPUT PHOTOTRANSISTOR		
Power Dissipation	100	mW
Collector-Emitter Voltage	30	V
Emitter-Collector Voltage	5	V
Collector Current	20	mA
Operating Temperature Range	-25 to + 85	
Storage Temperature Range	-40 to + 100	
Lead Soldering Temperature [1.6mm (.063") Form Case]	260 for 5 Seconds	



LITE-ON TECHNOLOGY CORPORATION

Property of LITON Only

ELECTRICAL OPTICAL CHARACTERISTICS AT TA=25

PARAMETER		SYMBOL	MIN.	TYP.	MAX.	UNIT	TEST CONDITION
INPUT LED							
Forward Voltage		V_F		1.2	1.6	V	$I_F = 20\text{mA}$
Reverse Current		I_R			100	μA	$V_R=5\text{V}$
OUTPUT PHOTOTRANSISTOR							
Collector-Emitter Dark Current		I_{CEO}			100	nA	$V_{CE}=10\text{V}$
COUPLER							
Collector-Emitter Saturation Voltage		$V_{CE(SAT)}$			0.4	V	$I_C=0.25\text{mA}$ $I_F=20\text{mA}$
On State Collector Current		$I_{C(ON)}$	0.5	1.2		mA	$V_{CE}=5\text{V}$ $I_F=20\text{mA}$
Response Time	Rise Time	T_r		3	15	μS	$V_{CE}=5\text{V}, I_C=2\text{mA}$ $R_L=100\Omega$
	Fall Time	T_f		4	20		

TYPICAL ELECTRICAL / OPTICAL CHARACTERISTICS CURVES

(25 Ambient Temperature Unless Otherwise Noted)

Fig.1 Power Dissipation vs. Ambient Temperature

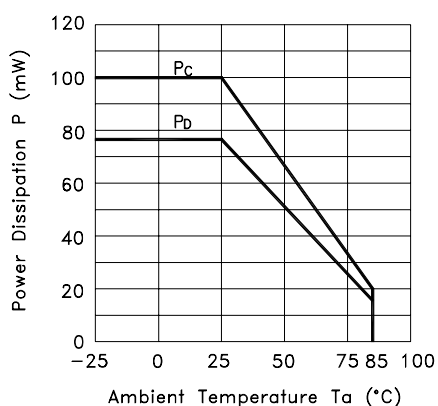


Fig.2 Forward Current vs. Forward Voltage

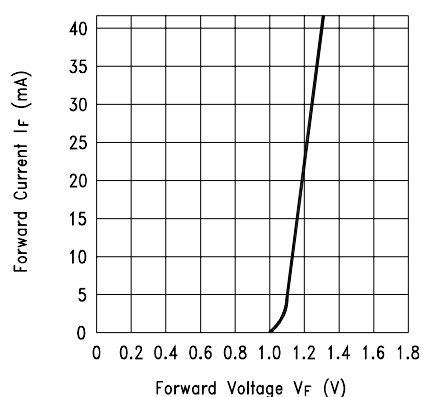


Fig.3 Collector Current vs. Collector-emitter Voltage


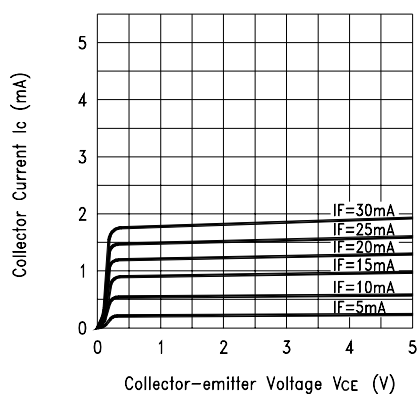



Fig.4 Collector Current vs. Ambient Temperature

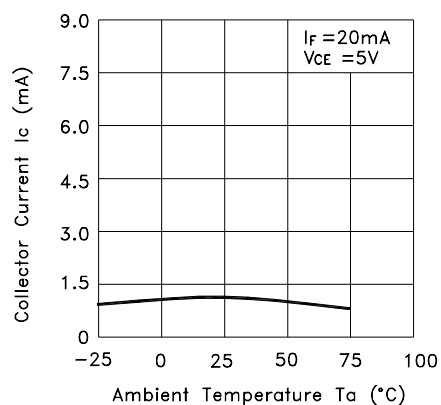

TYPICAL ELECTRICAL / OPTICAL CHARACTERISTICS CURVES

(25 Ambient Temperature Unless Otherwise Noted)

Fig.5 Response Time vs. Load Resistance

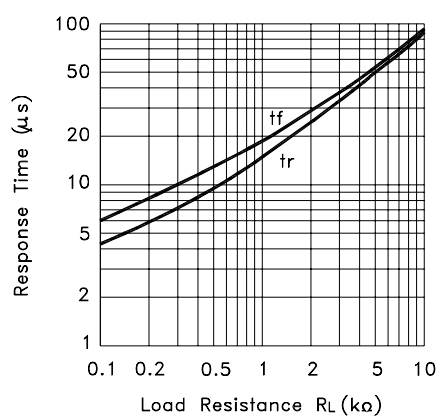

Test Circuit for Response Time

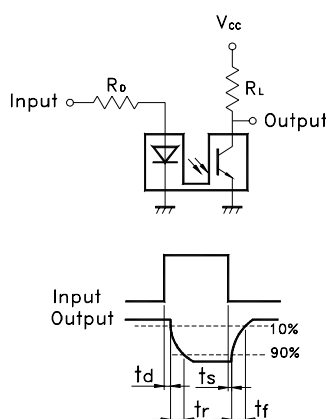


Fig.6 Collector-emitter Saturation Voltage vs. Ambient Temperature

