


技术参数		SPECIFICATIONS	精度等级Accuracy Class
• 负荷特性	PERFORMANCE		
额定输出	Rated Output(R.O.)	mv/v	2.0±0.10
非线性(含滞后)	Nonlinearity(Included Hysteresis)	% of R.O.	0.1 0.2
重复性	Repeatability.....	% of R.O.	0.1 0.2
蠕变(30分钟)	Creep.....	% of R.O.	0.1 0.2
• 电气特性	ELECTRICA		
推荐激励电压	Excitation,recommended.....	V ac or dc	10
最大激励电压	maximum.....	V ac or dc	15
零点输出	Zero balance.....	% of R.O	±1.0
输入电阻	Terminal resistance,input.....	Ohms	380±6
输出电阻	output.....	Ohms	350±1
绝缘电阻	Insulation resistance,bridge to ground.....	Ohms	5000M
• 温度特性	TEMPERATURE		
温度补偿范围	Temperature, compensated.....	℃	-10~+60
额定输出温度范围	Temperature effect on rated output.....	% of Reading/10℃	±0.02
零点输出温度范围	Temperature effect on zero blance.....	% of R.O./10℃	±0.03
• 机械特性	ADVERSE LOAD RATING		
容许过负荷	Safe overload.....	% of Rated Capacity	150
极限过负荷	Ultimate overload.....	% of Rated Capacity	300

外形尺寸 DIMENSIONS

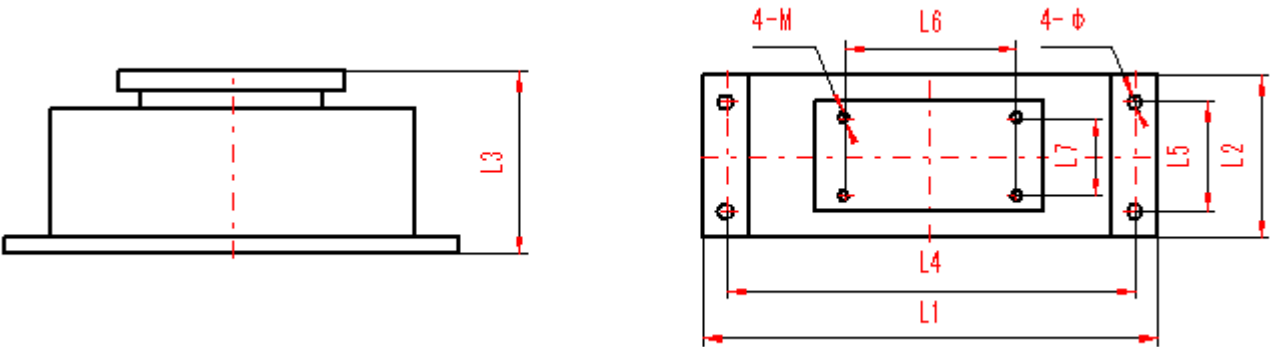

额定载荷(t) Reted Capocity	规格尺寸Size(mm)								
	L1	L2	L3	L4	L5	L6	L7	4-φ	M
0.5、1、2、3	400	140	160	360	100	160	80	17	M 14
5、10	500	180	200	450	120	190	85	20	M 16
15、20	550	200	235	500	120	190	90	22	M 20
25、30	600	215	240	550	120	190	90	22	M 20
40、60	800	270	305	740	150	220	120	26	M 24