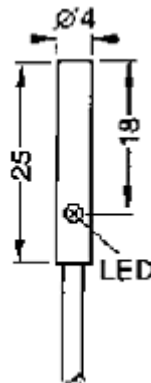







SUPER MINI PROXIMITY SWITCH							
CHRACTERISTICS			Adopt IC to contract volume, nip bracket, and convenient equipment.All with live instruction.				
SERIES NEMBER			LJI	LJN	LJM	LJE	LH
SIZE							
DETECT DISTANCE			Type insert: 0.8mm	Type insert: 0.8mm	Type insert: 0.8mm	Type insert: 2mm Type noninsert: 4mm	Type insert: 1mm Type noninsert: 2mm
RATED VOLTAGE			6-30VDC	6-30VDC	6-30VDC	6-30VDC	10-30VDC
CURRENT CONSUMED	DC		≤8mA	≤8mA	≤8mA	≤8mA	≤8mA
	AC		---	----	----	----	----
DETECTABLE OBJECTS			METAL	METAL	METAL	METAL	METAL
SUITABLE OUTPUT			 150mA	 150mA	 150mA	 150mA	 300mA
RESPONDED FREQUENCY			3KHZ、750HZ	3KHZ、750HZ	3KHZ、750HZ	1.5KHZ、600HZ	2KHZ、800HZ
CRUST MATERIALS			STAINLESS STEEL	STAINLESS STEEL	STAINLESS STEEL	Plastic	METAL CHROMEPLATE
TEMPRETURE			-25℃ ~ 85℃	-25℃ ~ 85℃	-25℃ ~ 85℃	-25℃ ~ 85℃	-25℃ ~ 85℃
SAFTY GRADE I E C			IP67	IP67	IP67	IP67	IP67
INSULATING RESISTANCE			Above 50M Ω	Above 50M Ω	Above 50M Ω	Above 50M Ω	Above 50M Ω
TYPE DC	N P N	OPEN	LJI-00824NA	LJN-00824NA	LJM-00824NA	LJE-0224NA	LH-0124NA
		CLOSED	LJI-00824NA	LJN-00824NA	LJM-00824NA	LJE-0224NA	LH-0124NA
		OPEN AND CLOSED					
	P N P	OPEN	LJI-00824PA	LJN-00824PA	LJM-00824PA	LJE-0224PA	LH-0124PA
		CLOSED	LJI-00824PB	LJN-00824PB	LJM-00824PB	LJE-0224PB	LH-0124PB
		OPEN AND CLOSED					
	TWO THREADS	OPEN				LJE-0224LA	LJE-0124LA
		CLOSED	LJI-00808LB	LJN-00808LB	LJM-00808LB	LJE-0224LB	LJE-0124LB
TYPE AC	TWO THREADS OPEN						
	TWO THREADS CLOSED						
	THREE THREADSOPEN AND CLOSED						