
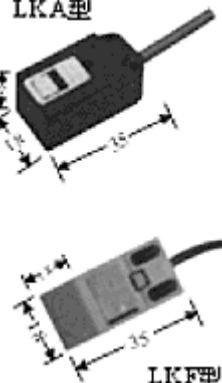





CLASSIFICATION			SQUARE COLUMN PROXIMITY SWITCH				
CHRACTERISTICS			Install directly on the metal and fully consider water -proof				
SERIES NEMBER			LK	LKA (F)	LKB	LKC	LKD
SIZE							
DETECT DISTANCE			Type insert: 5mm Type noninsert: 8mm	Type insert: 5mm Type noninsert: 8mm	Type insert: 7mm Type noninsert: 10mm	Type insert: 10mm Type noninsert: 15mm	Type insert: 12mm Type noninsert: 17mm
RATED VOLTAGE			10-30V DC	10-30V DC 90 - 250V AC	10-30V DC 90 - 250V AC	10-30V DC 90 - 250V AC	10-30V DC 90 - 250V AC
CURRENT CONSUMED	DC		≤8mA	≤8mA	≤8mA	≤8mA	≤8mA
	AC		-----	≤2. 5mA	≤2. 5mA	≤2. 5mA	≤2. 5mA
DETECTABLE OBJECTS			METAL	METAL	METAL	METAL	METAL
SUITABLE OUTPUT			 300mA	 300mA 300mA	 300mA 300mA	 300mA 300mA	 300mA 300mA
RESPONDED FREQUENCY			600HZ、200HZ	600HZ、20HZ	450HZ、20HZ	400HZ、15HZ	350HZ、15HZ
CRUST MATERIALS			Plastic	Plastic	Plastic	Plastic	Plastic
			-25℃ ~ 85℃	-25℃ ~ 85℃	-25℃ ~ 85℃	-25℃ ~ 85℃	-25℃ ~ 85℃
SAFTY GRADE I E C			IP67	IP67	IP67	IP67	IP67
INSULATING RESISTANCE			Above 50M Ω	Above 50M Ω	Above 50M Ω	Above 50M Ω	Above 50M Ω
TYPE DC	N P N	OPEN	LK-0524NA	LKA-0524NA	LKB-0724NA	LKC-1024NA	LKD-1224NA
		CLOSED	LK-0524NB	LKA-0524NB	LKB-0724NB	LKC-1024NB	LKD-1224NB
		OPEN AND CLOSED		LKA-0524NC	LKB-0724NC	LKC-1024NC	LKD-1224NC
	P N P	OPEN	LK-0524PA	LKA-0524PA	LKB-0724PA	LKC-1024PA	LKD-1224PA
		CLOSED	LK-0524PB	LKA-0524PB	LKB-0724PB	LKC-1024PB	LKD-1224PB
		OPEN AND CLOSED		LKA-0524PC	LKB-0724PC	LKC-1024PC	LKD-1224PC
	TWO THREADS	OPEN	LK-0524LA	LKA-0524LA	LKB-0724LA	LKC-1024LA	LKD-1224LA
		CLOSED	LK-0524LB	LKA-0524LB	LKB-0724LB	LKC-1024LB	LKD-1224LB
TYPE AC	TWO THREADS OPEN			LKA-0522KA	LKB-0722KA	LKC-1022KA	LKD-1222KA
	TWO THREADS CLOSED			LKA-0522KB	LKB-0722KB	LKC-1022KB	LKD-1222KB
	THREE THREADSOPEN AND CLOSED				LKB-0722KC	LKC-1022KC	LKD-1222KC