

## 0.30" SINGLE DIGIT NUMERIC DISPLAY

LIN-3014XX PURE GREEN

LIN-3015XX PURE GREEN


### Features

- ◆ 0.30" DIGIT HEIGHT
- ◆ EXCELLENT CHARACTER APPEARANCE
- ◆ EASY MOUNTING ON P.C. BOARDS OR SOCKETS.
- ◆ I.C. COMPATIBLE.
- ◆ MECHANICALLY RUGGED.
- ◆ STANDARD: BLACK /GRAY FACE, WHITE SEGMENT.

### Description

The Pure Green source color devices are made with Gallium Arsenide Phosphide on Gallium Phosphide Pure Green Light Emitting Diode.

### Package Dimensions & Internal Circuit Diagram

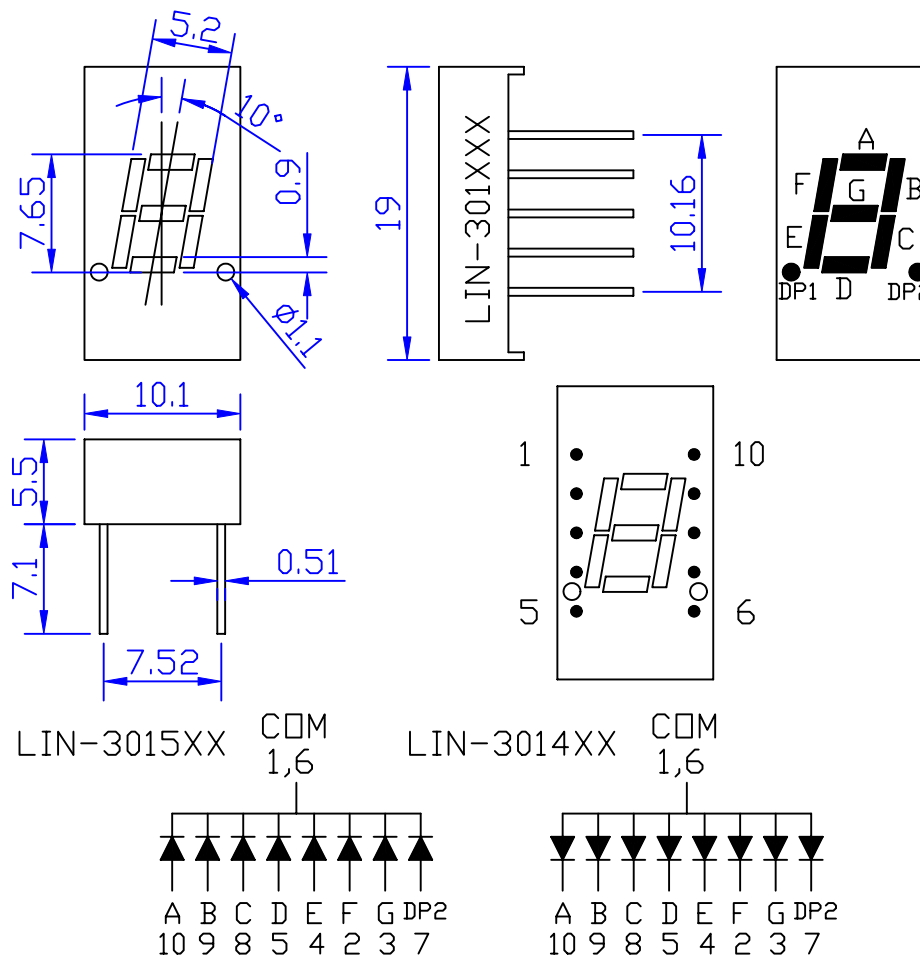

### Notes:

1. All dimensions are in millimeters (inches), Tolerance is  $\pm 0.25(0.01)$  unless otherwise noted.
2. Specifications are subject to change without notice.

## Absolute Maximum Rating ( $T_a=25\text{ }^{\circ}\text{C}$ )

| Parameter                   | Symbol    | Green<br>(GaP/GaP) | Unit               |
|-----------------------------|-----------|--------------------|--------------------|
| Continuous Forward current  | $I_{AF}$  | 30                 | mA                 |
| Peak forward current (Duty) | $I_{PF}$  | 100                | mA                 |
| Reverse voltage             | $V_R$     | 5                  | V                  |
| Operating temp.             | $T_{OPR}$ | -20~+85            | $^{\circ}\text{C}$ |
| Storage temp.               | $T_{STG}$ | -25~+85            | $^{\circ}\text{C}$ |

\*Soldering Bath : not more than 3 seconds @260 $^{\circ}\text{C}$ . The bottom ends of plastic reflector should be at least 2 mm above the solder surface.

Soldering Iron : not more than 3 seconds @300 $^{\circ}\text{C}$  under 30 W.

## ELECTRO-OPTICAL CHARACTERISTICS ( $T_a=25\text{ }^{\circ}\text{C}$ )

|                          | Symbol             | Condition         | Min. | Typ. | Max. | Unit          |
|--------------------------|--------------------|-------------------|------|------|------|---------------|
| Forward Voltage          | $V_F$              | $I_F=20\text{mA}$ | 3.0  | 3.5  | 4.0  | V             |
| Reverse Current          | $I_R$              | $V_R=5\text{V}$   |      |      | 100  | $\mu\text{A}$ |
| Luminous Intensity       | $I_v$              | $I_F=20\text{mA}$ | 1500 | 2500 |      | mcd           |
| Peak Emission Wavelength | $\lambda_p$<br>Hue | $I_F=20\text{mA}$ | 515  | 525  | 530  | nm            |
| Spectral Line Half-Width | $\triangle\lambda$ | $I_F=20\text{mA}$ |      | 30   |      | nm            |
| View Angle               | $2\Theta\ 1/2$     | $I_F=20\text{mA}$ |      | 22   |      | deg           |