

0.36 " SINGLE DIGIT NUMERIC DISPLAY

LIN-3612XX SUPER RED

LIN-3613XX SUPER RED


Features

- ◆0.36 " DIGIT HEIGHT
- ◆EXCELLENT CHARACTER APPEARANCE
- ◆EASY MOUNTING ON P.C.BOARDS OR SOCKETS.
- ◆I.C. COMPATIBLE.
- ◆MECHANICALLY RUGGED.
- ◆STANDARD: BLACK /GRAY FACE, WHITE SEGMENT.

Description

The Super Red source color devices are made with Gallium Arsenide Phosphide on Gallium Phosphide Super Red Light Emitting Diode.

Package Dimensions & Internal Circuit Diagram

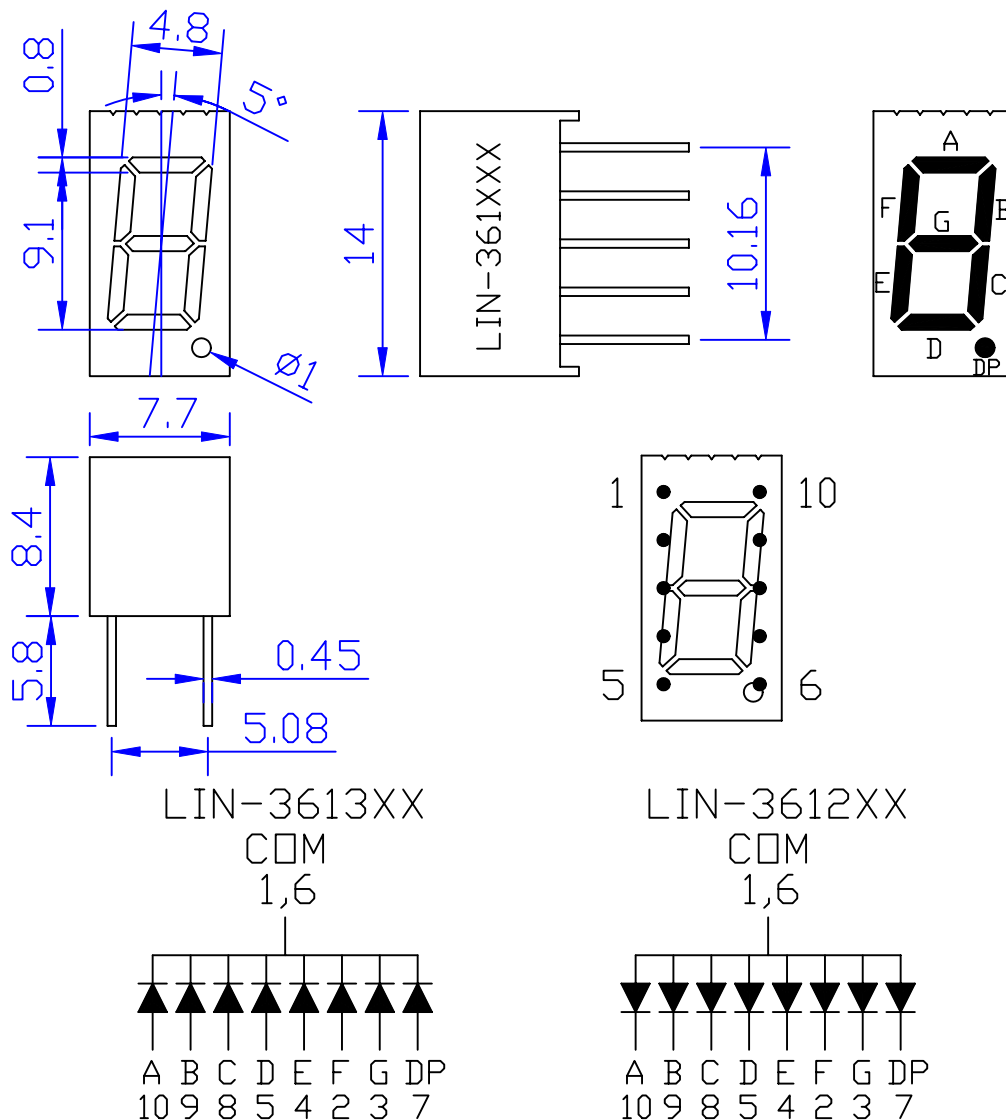

Notes:

- 1.All dimensions are in millimeters (inches), Tolerance is $\pm 0.25(0.01)$ " unless otherwise noted.
- 2.Specifications are subject to change without notice.

Absolute Maximum Rating ($T_a=25^\circ\text{C}$) (Per Segment)

Parameter	Symbol	Red (GaAlAs/GaAs,SH)	Unit
Continuous Forward current	I_{AF}	30	mA
Peak forward current (Duty Cycle 1/10, 1/100)	I_{PF}	200	mA
Reverse voltage	V_R	5	V
Operating temp.	T_{OPR}	-20~+85	$^\circ\text{C}$
Storage temp.	T_{STG}	-25~+85	$^\circ\text{C}$

*Soldering Bath : not more than 3 seconds @260 $^\circ\text{C}$. The bottom ends of plastic reflector should be at least 2 mm above the solder surface.

Soldering Iron : not more than 3 seconds @300 $^\circ\text{C}$ under 30 W.

ELECTRO-OPTICAL CHARACTERISTICS ($T_a=25^\circ\text{C}$)

	Symbol	Condition	Min.	Typ.	Max.	Unit
Forward Voltage	V_F	$I_F=20\text{mA}$		1.81		V
Reverse Current	I_R	$V_R=5\text{V}$			100	μA
Luminous Intensity	I_v	$I_F=10\text{mA}$		17.48		mcd
Peak Emission Wavelength	λ_p	$I_F=20\text{mA}$		660		nm
Spectral Line Half-Width	$\Delta\lambda$	$I_F=20\text{mA}$		20		nm
View Angle	$2\Theta_{1/2}$	$I_F=20\text{mA}$				deg