

0.39 " THREE DIGIT NUMERIC DISPLAY

LIN-3932XX RED
LIN-3933XX RED



Features

- ◆0.39 " DIGIT HEIGHT
- ◆EXCELLENT CHARACTER APPEARANCE
- ◆EASY MOUNTING ON P.C.BOARDS OR SOCKETS.
- ◆I.C. COMPATIBLE.
- ◆MECHANICALLY RUGGED.
- ◆STANDARD: BLACK /GRAY FACE, WHITE SEGMENT.

Description

The Red source color devices are made with Gallium Arsenide Phosphide on Gallium Phosphide Red Light Emitting Diode.

Package Dimensions & Internal Circuit Diagram

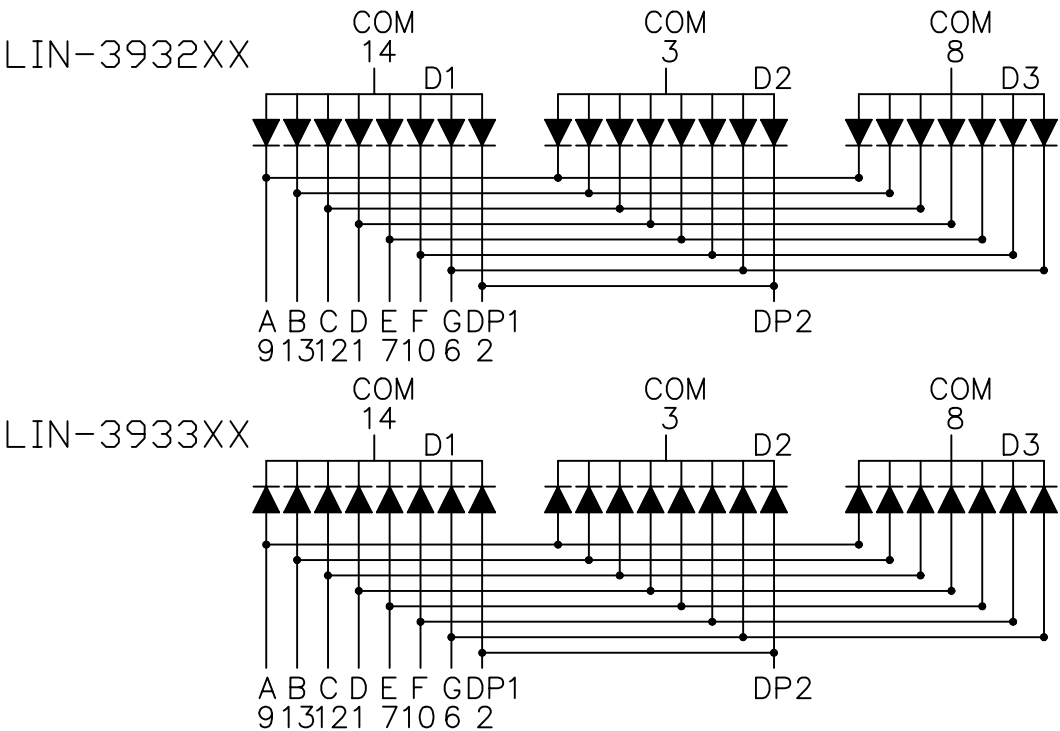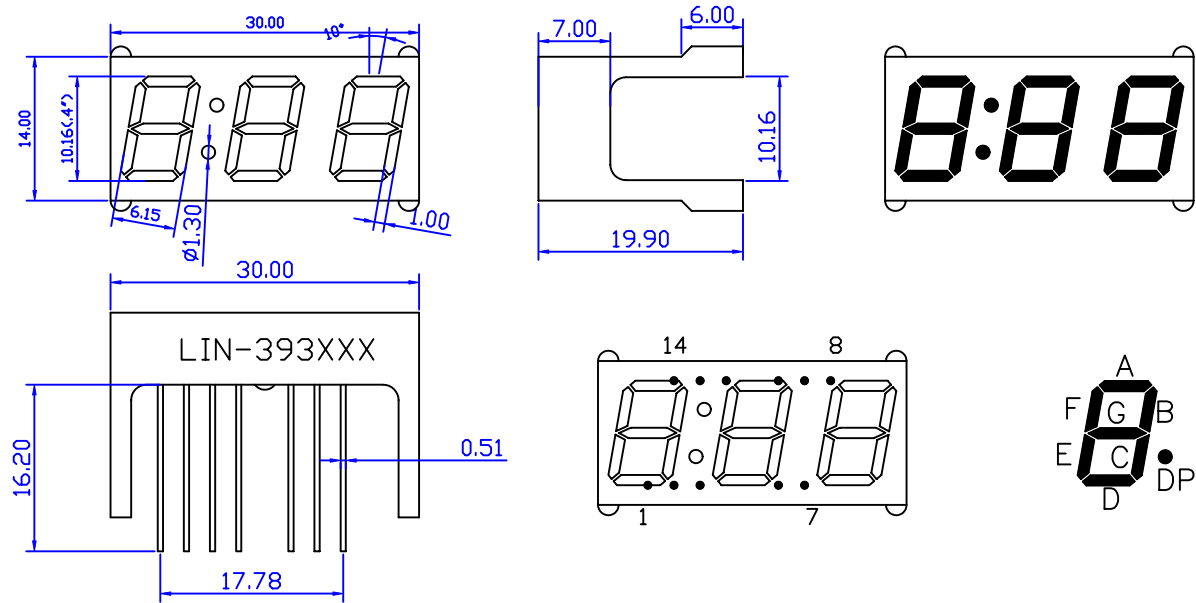

Notes:

- 1.All dimensions are in millimeters (inches), Tolerance is +/-0.25(0.01") unless otherwise noted.
- 2.Specifications are subject to change without notice.

Absolute Maximum Rating ($T_a=25^{\circ}\text{C}$) (Per Segment)

Parameter	Symbol	Red (GaP/GaP)	Unit
Continuous Forward current	I_{AF}	15	mA
Peak forward current (Duty	I_{PF}	60	mA
Reverse voltage	V_R	5	V
Operating temp.	T_{OPR}	-20~+85	$^{\circ}\text{C}$
Storage temp.	T_{STG}	-25~+85	$^{\circ}\text{C}$

*Soldering Bath : not more than 3 seconds @260 $^{\circ}\text{C}$. The bottom ends of plastic reflector should be at least 2 mm above the solder surface.

Soldering Iron : not more than 3 seconds @300 $^{\circ}\text{C}$ under 30 W.

ELECTRO-OPTICAL CHARACTERISTICS ($T_a=25^{\circ}\text{C}$)

	Symbol	Condition	Min.	Typ.	Max.	Unit
Forward Voltage	V_F	$I_F=10\text{mA}$		2.10		V
Reverse Current	I_R	$V_R=5\text{V}$			100	μA
Luminous Intensity	I_v	$I_F=10\text{mA}$		0.7		mcd
Peak Emission Wavelength	λ_p Hue	$I_F=10\text{mA}$		695		nm
Spectral Line Half-Width	$\triangle\lambda$	$I_F=10\text{mA}$		100		nm
View Angle	$2\Theta 1/2$	$I_F=20\text{mA}$				deg