


LED DATA SHEET

Part No.	LUY105B3		
Emitted Color	Ultra Super Yellow	Len's Color	Water Clear

Features:

High Flux Output For High Current Operation
High intensity and reliable For Automotive Equipment
Chip material : AlGaInP

Package Dimensions:

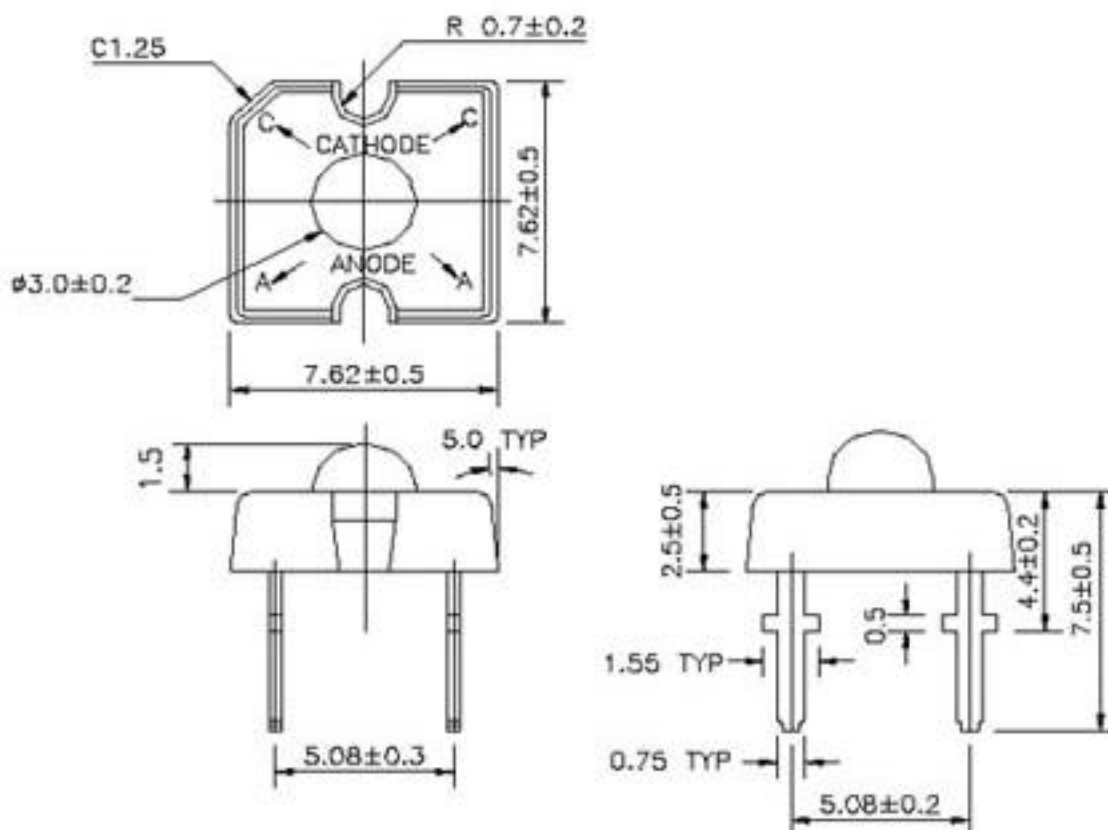

- 1、 All dimensions are in millimetres (mm)
- 2、 Tolerance is ± 0.25 mm unless otherwise noted

Part No.	LUY105B3	Edition Data:2003-05-10	Page: 1of 3
		http://www.wenrun.com	Fax:0511-5512860

Absolute Maximum Rating (Ta=25)

Parameter	Symbol	Max.	Unit
Power Dissipation	P_M	150	Mw
Pulse Forward Current (Duty 1/10 @ 1kHz)	I_{FP}	120	mA
Continuous Forward Current	I_F	50	mA
Reverse Voltage	V_R	6	V
Operating Temperature Range	T_{opr}	-25 ~ 85	
Storage Temperature Range	T_{stg}	-40 ~ 100	
Solder Temperature : 2.0mm From Body For 3 Seconds at 260			

Electrical Optical Characteristics (Ta=25)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Condition
Luminous Intensity	I_v	--	300	--	mcd	$I_F = 20mA$
Forward Voltage	V_F	--	2.2	2.5	V	$I_F = 20mA$
Reverse Current	I_R	--		50	μA	$V_R = 5V$
Dominant Wavelength	λ_d	--	590	--	nm	$I_F = 20mA$
Peak Emission Wavelength	λ_p	--	594	--	nm	$I_F = 20mA$
Spectral Line Half Width	$\Delta \lambda$	--	20	--	nm	$I_F = 20mA$
Viewing Angle	$2\theta_{1/2}$	--	90	--	Deg.	$I_F = 20mA$

Note:

- 1、The luminous intensity data and λ_p is survey values with the machine JF- 、JS-2000.
- 2、 $2\theta_{1/2}$ is the clip angle at which the luminous intensity is half the axial luminous intensity.

Typical Characteristic Curves:

