


LED DATA SHEET

Part No.	LHG30262		
Emitted Color	Red/Green	Len's Color	White Diffused

Features:

3mm Red and Green Dual-color type
 General purpose leads
 Chip material : GaP/GaP

Package Dimensions:

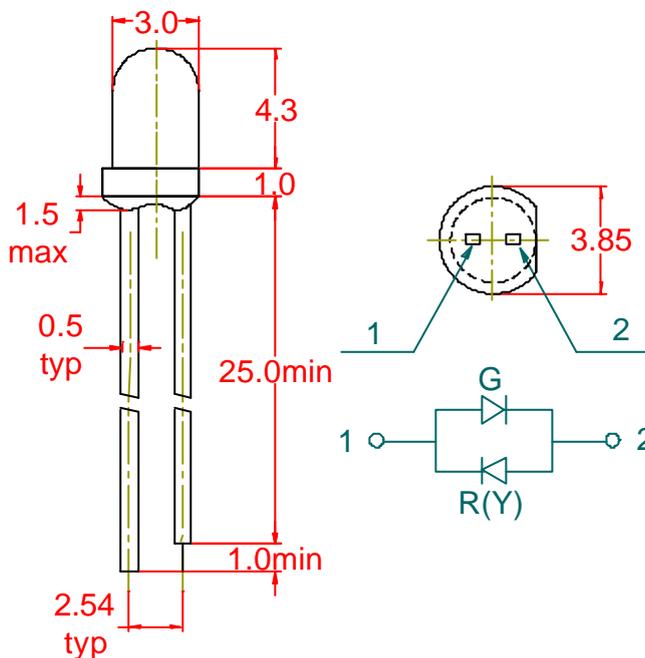

Note:

- 1、 All dimensions are in millimetres (mm)
- 2、 Tolerance is $\pm 0.25\text{mm}$ unless otherwise noted

Absolute Maximum Rating (Ta=25)

Parameter	Symbol	Max.	Unit
Power Dissipation	P _M	H(45)	Mw
		G(80)	
Pulse Forward Current (Duty 1/10 @ 1kHz)	I _{FP}	H(50)	mA
		G(100)	
Continuous Forward Current	I _F	H(15)	mA
		G(30)	
Reverse Voltage	V _R	6	V
Operating Temperature Range	Topr	-25 ~ 85	
Storage Temperature Range	Tstg	-40 ~ 100	
Solder Temperature : 2.0mm From Body For 3 Seconds at 260			

Electrical Optical Characteristics (Ta=25)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Condition
Luminous Intensity	I _V	--	H(1.5)	--	mcd	I _F =10mA
			G(2.5)			
Forward Voltage	VF	--	H(2.2)	2.5	V	I _F =20mA
			G(2.2)			
Reverse Current	IR	--	--	50	uA	V _R =5V
Peak Emission Wavelength	P	--	H(690)	--	nm	I _F =20mA
			G(567)			
Viewing Angle	2 1/2	--	70	--	Deg.	I _F =20mA

Note:

- 1、The luminous intensity data and P is survey values with the machine JF- 、 JS-2000.
- 2、2 1/2 is the clip angle at which the luminous intensity is half the axial luminous intensity.