

LED DATA SHEET

Part No.	LI615C20		
Emitted Color	Orange	Len's Color	Color Diffused


◆ Features:

2.0 × 5mm Rectangular Without Flange resin mold type

General purpose leads

Chip material : GaAsP

◆ Package Dimensions:

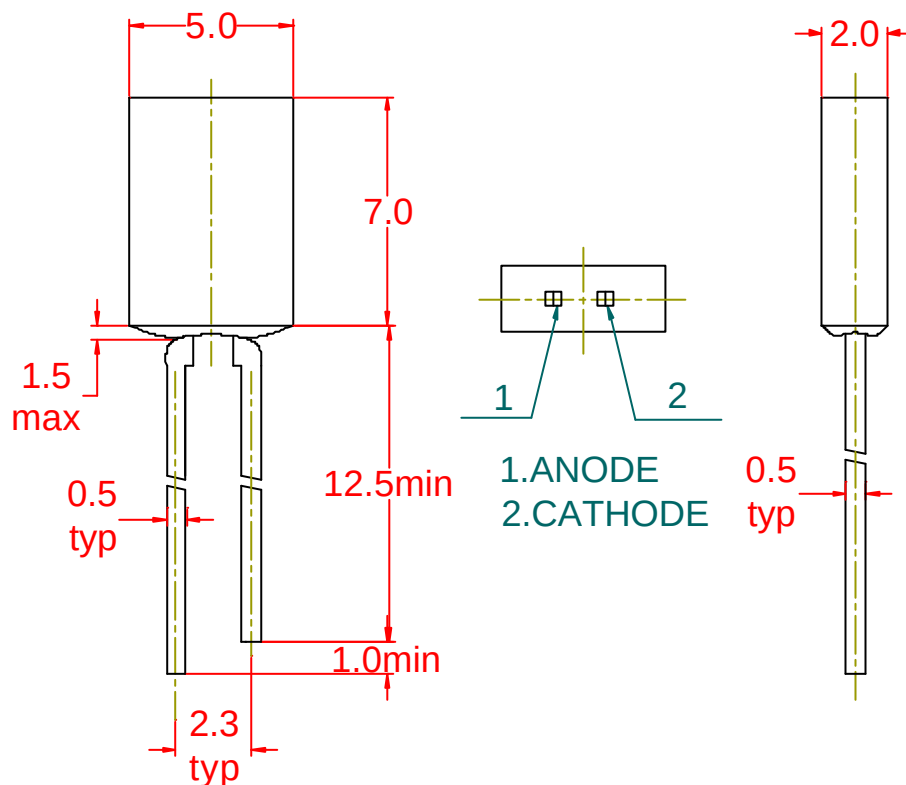

Note:

- 1、 All dimensions are in millimetres (mm)
- 2、 Tolerance is $\pm 0.25\text{mm}$ unless otherwise noted

◆ Absolute Maximum Rating (Ta=25°C)

Parameter	Symbol	Max.	Unit
Power Dissipation	P_M	100	Mw
Pulse Forward Current (Duty 1/10 @ 1kHz)	I_{FP}	120	mA
Continuous Forward Current	I_F	40	mA
Reverse Voltage	V_R	6	V
Operating Temperature Range	Topr	-25°C~85°C	°C
Storage Temperature Range	Tstg	-40°C~100°C	°C
Solder Temperature : 2.0mm From Body For 3 Seconds at 260°C			

◆ Electrical Optical Characteristics (Ta=25°C)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Condition
Luminous Intensity	I_V	--	3.5	--	mcd	$I_F = 10\text{mA}$
Forward Voltage	V_F	--	2.0	2.5	V	$I_F = 20\text{mA}$
Reverse Current	I_R	--		50	uA	$V_R = 5\text{V}$
Dominant Wavelength	λ_d	--	625	--	nm	$I_F = 20\text{mA}$
Peak Emission Wavelength	λ_p	--	635	--	nm	$I_F = 20\text{mA}$
Spectral Line Half Width	$\Delta \lambda$	--	35	--	nm	$I_F = 20\text{mA}$
Viewing Angle	$2\theta_{1/2}$	--	80	--	Deg.	$I_F = 20\text{mA}$

Note:

- 1、The luminous intensity data and λ_p is survey values with the machine JF- II、JS-2000.
- 2、 $2\theta_{1/2}$ is the clip angle at which the luminous intensity is half the axial luminous intensity.

◆ Typical Characteristic Curves:

