
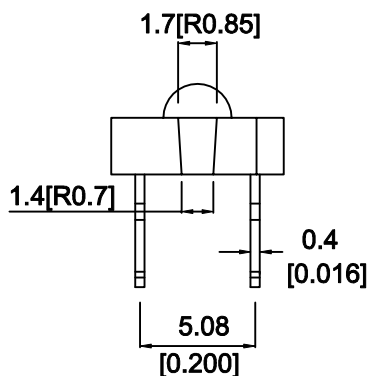
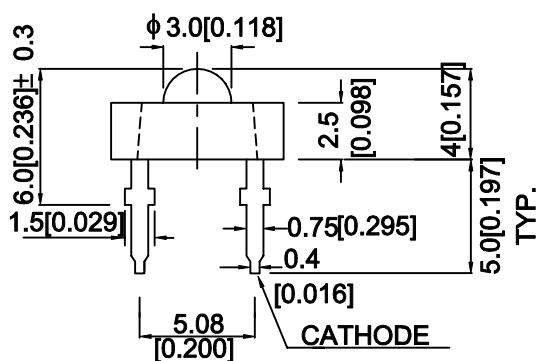



SUPER FLUX LEDS

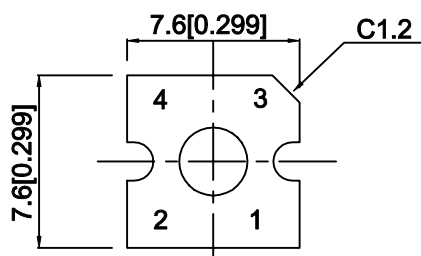

UNIT : MM(INCH)

TOLERANCE : ± 0.25[± 0.01] UNLESS OTHERWISE NOTED.

Dice	Condition	Peak Emission Wavelength			UNIT
		Min.	Typ.	Max.	
HYPER ORANGE (InGaAlP)	I _F =20mA	-	630	-	nm

Selection Guide

Part No.	Dice	Lens Type	I _v (mcd) @20mA *70mA		Viewing Angle
			Min.	Typ.	2θ 1/2
L7676CSEC/E	SUPER RIGHT ORANGE (InGaAlP)	WATER CLEAR	500	800	70°
			*1500	*2800	

APPROVED:

J. Chuang

CHECKED:

J. Chao

DRAWN :

L.N. Sheu

SCALE :

3 : 1

DATA NO. : F6012

V.1

DATE : MAY/23/2000