



SPECIFICATION FOR LED LAMP

P/N : LY331CBN

Preliminary

Designed by	Qualified by	Approved by Customer

LY331CBN

Spec. No. : GT-0210-09-123

Features

- ◆ Standard T-1 package
- ◆ General purpose leads
- ◆ Viewing Angle : 25°

Benefits

- ◆ High intensity
- ◆ Lower Power Consumption
- ◆ High Reliability and Firm and Solid
- ◆ Optimal Optical and Mechanical Design




LED Picture

Applications

- ◆ Electronic Signs and Signals
- ◆ Small Area Illumination
- ◆ General Purpose Indicators
- ◆ Legend Backlighting

Description

- ◆ The T-1 lamps are untinged, nondiffused .,
The precise optical design takes fine or special radiant pattern. This characteristic provides suitable viewing angle and helpful for special lighting function.

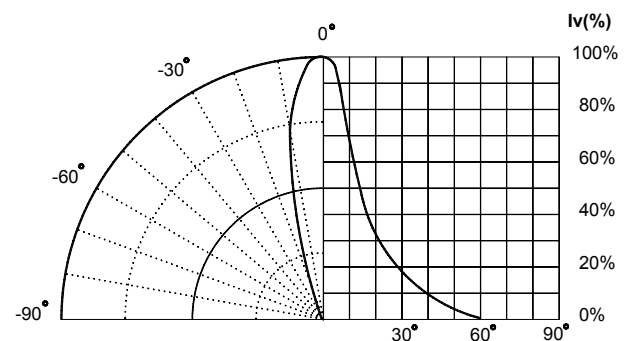


Beam Pattern

Device Selection Guide

Part Number	Viewing Angle	Resin Color	LED Color	Chip Material	Stand OFF
LY331CBN	25°	Water Clear	Yellow	AlGaInP/GaAs	No

Package Dimensions

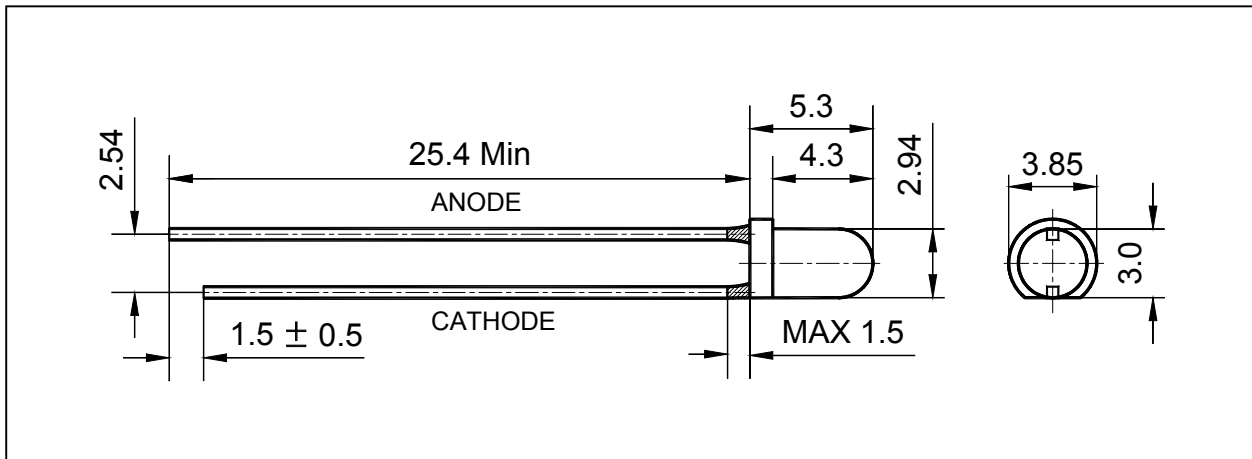

- Notes:**
1. All dimensions are in millimeters
 2. Tolerance is $\pm 0.20\text{mm}$ unless otherwise noted.
 3. Protruded resin under flange is 1.5mm max.
 4. Lead spacing is measured where the leads emerge from the package.
 5. Specifications are subject to change without notice.

Absolute Maximum Rating at $T_a=25^\circ\text{C}$

Parameter	Value	Units
Power Dissipation	150	mW
Peak Forward Current(1/10 Duty Cycle, 0.1ms Pulse Width)	100	mA
Forward Current	50	mA
Reverse Voltage	25	V
Operating Temperature Range	-40°C to $+80^\circ\text{C}$	
Storage Temperature Range	-55°C to $+100^\circ\text{C}$	
Lead Soldering Temperature(3mm From Body)	260 $^\circ\text{C}$ for 5 Seconds	

Electrical Optical Characteristics at Ta=25℃

Parameter	Symbol	Min.	Typ.	Max.	Unit	Remark
Luminous Intensity	I_v	580	----	----	mcd	$I_f=20mA$
Viewing Angle	$2\theta_{1/2}$	----	25	----	Deg.	$I_f=20mA$
Dominant Wavelength	λ_d	----	590	----	nm	$I_f=20mA$
Forward Voltage	V_f	----	2.0	2.4	V	$I_f=20mA$
Reverse Current	I_r	----	----	100	μA	$V_r=10V$

Note: 1.Luminous intensity is measured with a light sensor and filter combination that approximates the CIE eye-response curve.

2. $\theta_{1/2}$ is the off-axis angle at which the luminous intensity is half the axial luminous intensity, $2\theta_{1/2} = \theta_{1/2} + \theta_{1/2}$.

Bin Ranks

Rank	G	H	J
Luminous Intensity ($I_f = 20mA$)	580~750 mcd	750~980 mcd	980~1300 mcd
Rank	K	L	M
Luminous Intensity ($I_f = 20mA$)	1300~1700 mcd	1700~2200 mcd	2200~2800 mcd

Rank	Y3	Y4	Y5	Y6	Y7
Wavelength Specification ($I_f = 20mA$)	584~586nm	586~588nm	588~590nm	590~592nm	592~594nm

Note: The quantity ratio of the ranks is decided by GVOPTO.

Measurement Uncertainty of the Luminous intensity : $\pm 15\%$

Measurement Uncertainty of the Forward Voltage : $\pm 0.1V$

Measurement Uncertainty of the Dominant Wavelength : $\pm 1.0nm$






Cautions on LED Usage

1. Static electricity and electrical surge will damage the LEDs. It is recommended to use a wrist band or anti-electrostatic glove when handling the LEDs.
2. Use grounded soldering iron and do not solder the LEDs at the conditions beyond the absolute maximum ratings specified in the data sheet.
3. G.V. will not be held responsible for any damage caused by the operation exceeds the absolute maximum ratings.
4. Use the LEDs as soon as possible once the bag was opened. Store and use in where there is no corrosive gas.


The leads of LEDs will be rusted if the LEDs were exposed to the air in longer time.

Typical Electrical / Optical Characteristics Curves

(25°C Ambient Temperature Unless Otherwise Noted)

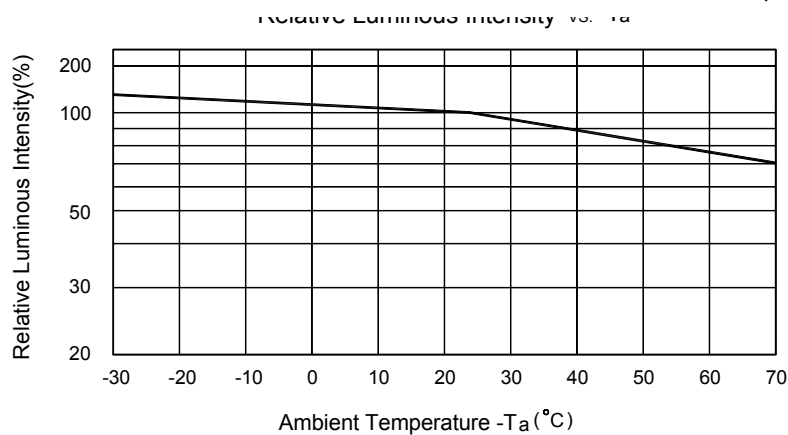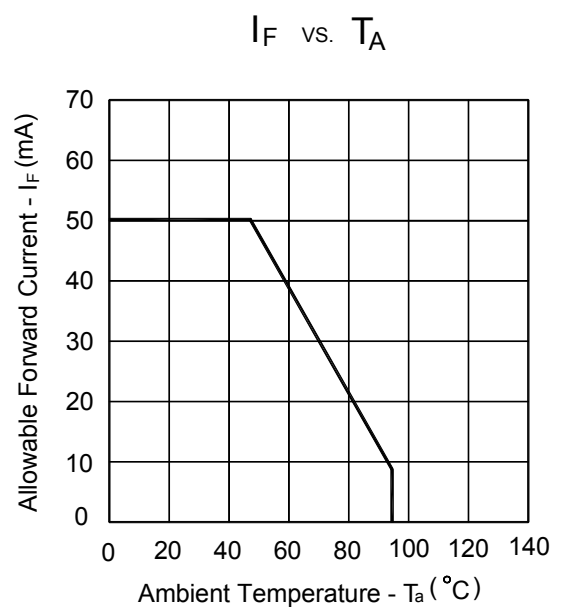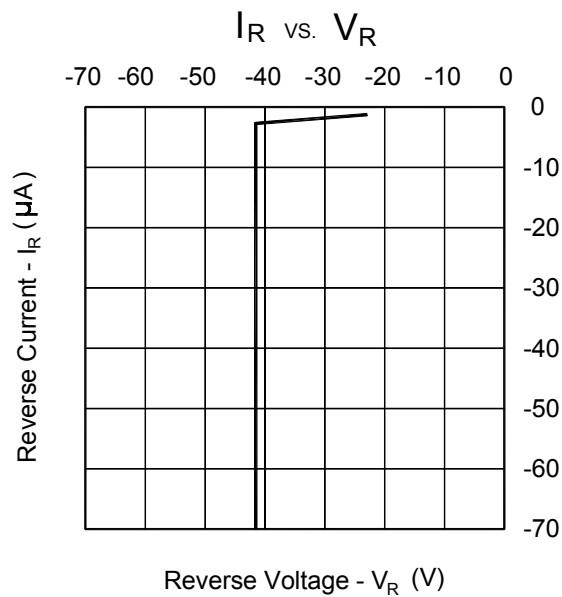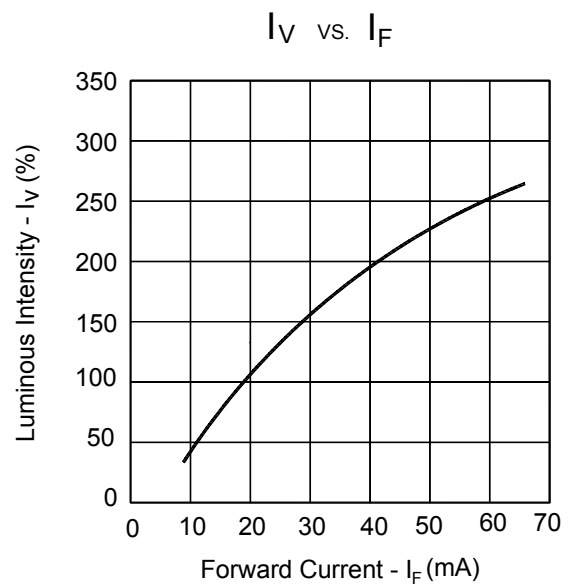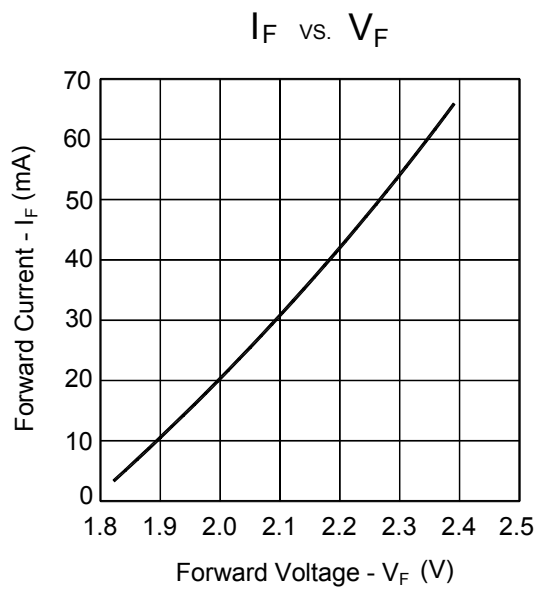

Packing Specification

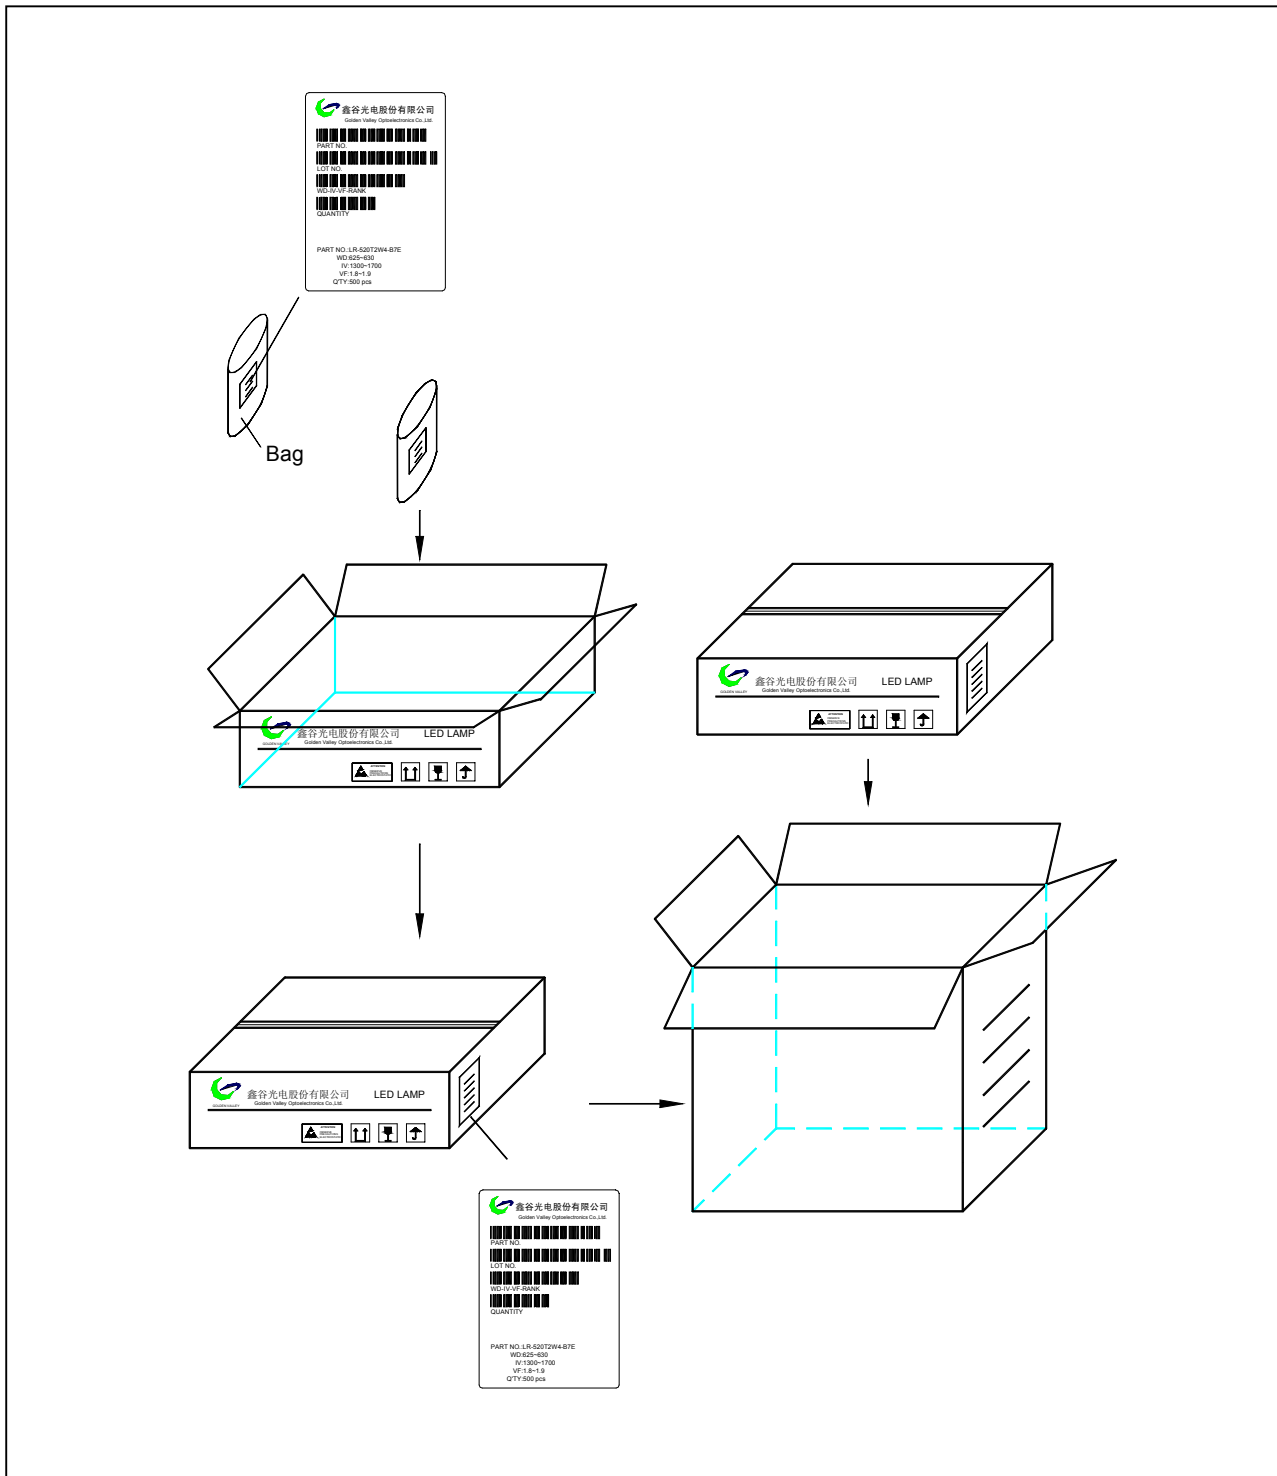

Notes :

1. Inner ploy bag is common products
2. 20 bags per inner box, 20 kpcs per inner box .
3. 3 inner box per outer box, 60 kpcs per outer box