
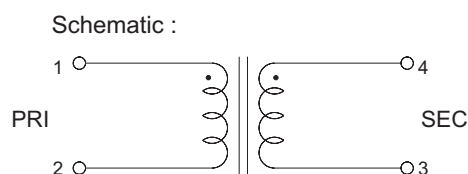
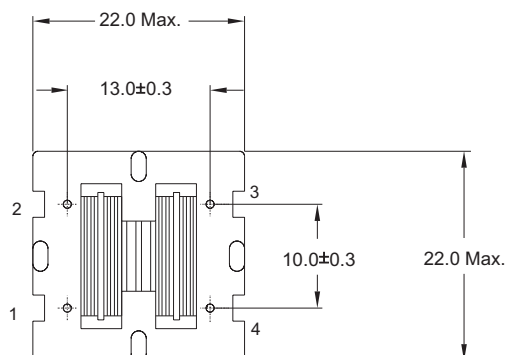




Line Filters

EMI Common-Mode Suppression Inductors

LFZ20H Type

Mechanical Dimension: Unit: mm

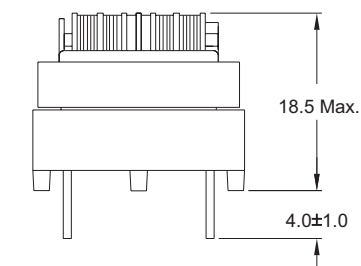

Electrical Characteristics:

■ AT 25°C, 40KHz/1V Tested:

PART NO.	INDUCTANCE (mH) MIN	DCR (mΩ) MAX	RATED CURRENT (Aac)	TEMPERATURE RISE (°C) MAX
LFZ20H01	47.0	2870	0.30	45
LFZ20H02	31.0	1890	0.40	45
LFZ20H03	23.0	1400	0.50	45
LFZ20H04	19.0	1110	0.55	45
LFZ20H05	15.0	990	0.60	45
LFZ20H06	13.0	745	0.70	45
LFZ20H07	10.0	580	0.80	45
LFZ20H08	7.0	410	0.90	45
LFZ20H09	5.6	330	1.10	45
LFZ20H10	4.4	255	1.30	45
LFZ20H11	2.7	155	1.70	45
LFZ20H12	1.8	105	2.00	45

* WITHSTANDING VOLTAGE BETWEEN L1 & L2 1.5KV 1 MINUTE
* GOOD DIFFERENCE IN WINDING L1 & L2 INDUCTANCE



沙井欣旺电子有限公司

XINWANG ELECTRONICS, INC.
TEL: 0755-29696626 FAX: 0755-27289711
E-mail: zhangxf815@163.com