

FEATURES

- Dual Output from a Single Input Rail
- Industry Standard Pinout
- Power Sharing on Output
- 1kVDC Isolation
- Efficiency to 80%
- Power Density 0.85W/cm³
- 24V & 48V Input
- 5V, 9V, 12V and 15V Output
- Footprint from 1.17cm²
- UL 94V-0 Package Material
- No Heatsink Required
- Internal SMD Construction
- Toroidal Magnetics
- Fully Encapsulated
- No External Components Required
- Custom Solutions Available

DESCRIPTION

The NMA series of DC-DC converters are the standard building blocks for on-board distributed power systems. They are ideally suited to providing dual rail supplies on primarily digital boards with the added benefit of galvanic isolation to reduce switching noise. All of the rated power may be drawn from a single pin provided the total load does not exceed 1 Watt.

SELECTION GUIDE

	Nominal Input Voltage	Output Voltage	Output Current	Efficiency	Isolation Capacitance	MTTF ¹	Package Style
Order Code	(V)	(V)	(mA)	(%)	(pF)	kHrs	
NMA2405D	24	5	±100	70	39	194	DIP
NMA2409D	24	9	±55	80	50	166	
NMA2412D	24	12	±42	80	65	134	
NMA2415D	24	15	±33	80	95	101	
NMA2405S	24	5	±100	70	39	194	SIP
NMA2409S	24	9	±55	80	50	166	
NMA2412S	24	12	±42	80	65	134	
NMA2415S	24	15	±33	80	95	101	
NMA4805D	48	5	±100	70	26	206	DIP
NMA4809D	48	9	±55	80	38	174	
NMA4812D	48	12	±42	80	52	139	
NMA4815D	48	15	±33	80	56	104	
NMA4805S	48	5	±100	70	26	206	SIP
NMA4809S	48	9	±55	80	38	174	
NMA4812S	48	12	±42	80	52	139	
NMA4815S	48	15	±33	80	56	104	

i When operated **without** additional external load capacitance, the output voltage of the devices is guaranteed to be within 95% of its steady state value within 100ms after the input voltage has reached 95% of its steady state value, **irrespective of the rise time of the input voltage.**

ii When operated **with** additional external load capacitance the rise time of the input voltage will determine the maximum external capacitance value for guaranteed start up. The slower the rise time of the input voltage the greater the maximum value of the additional external capacitance for reliable start up.

INPUT CHARACTERISTICS

Parameter	Conditions	MIN	TYP	MAX	Units
Voltage Range	Continuous operation, 24V input types	21.6	24	26.4	V
	Continuous operation, 48V input types	43.2	48	52.8	

OUTPUT CHARACTERISTICS

Parameter	Conditions	MIN	TYP	MAX	Units
Rated Power ²	T _A = 0°C to 70°C			1	W
Voltage Set Point Accuracy	See tolerance envelope				
Line Regulation	High V _{IN} to low V _{IN}			1.2	%/%
Load Regulation	10% load to rated load, 5V output types			15	%
	10% load to rated load, all other output types			10	
Ripple & Noise	BW=DC to 20MHz, all input types			150	mV p-p

ABSOLUTE MAXIMUM RATINGS

Short-circuit duration ³	1 second
Lead temperature 1.5mm from case for 10 seconds	300°C
Input voltage V _{IN} , NMA24 types	28V
Input voltage V _{IN} , NMA48 types	54V

1 Calculated using MIL-HDBK-217F with nominal input voltage at full load.

2 See derating curve

3 Supply voltage must be discontinued at the end of the short circuit duration.

All specifications typical at T_A=25°C, nominal input voltage and rated output current unless otherwise specified.

NMA 24V & 48V SERIES

Isolated 1W Dual Output DC-DC Converters

ISOLATION CHARACTERISTICS

Parameter	Conditions	MIN	TYP	MAX	Units
Isolation Test Voltage	Flash tested for 1 second	1000			VDC
Resistance	Viso=500VDC	1			G

GENERAL CHARACTERISTICS

Parameter	Conditions	MIN	TYP	MAX	Units
Switching Frequency	All input types		100		kHz

TEMPERATURE CHARACTERISTICS

Parameter	Conditions	MIN	TYP	MAX	Units
Specification	All output types	0		70	°C
Storage		-55		150	°C
Cooling	Free air convection				

PIN CONNECTIONS


14 Pin DIP

PIN	
1	GND
7	NC
8	0V
9	+V
11	-V
14	V _{IN}


7 Pin SIP

PIN	
1	V _{IN}
2	GND
4	-V
5	0V
6	+V

PERFORMANCE CHARACTERISTICS

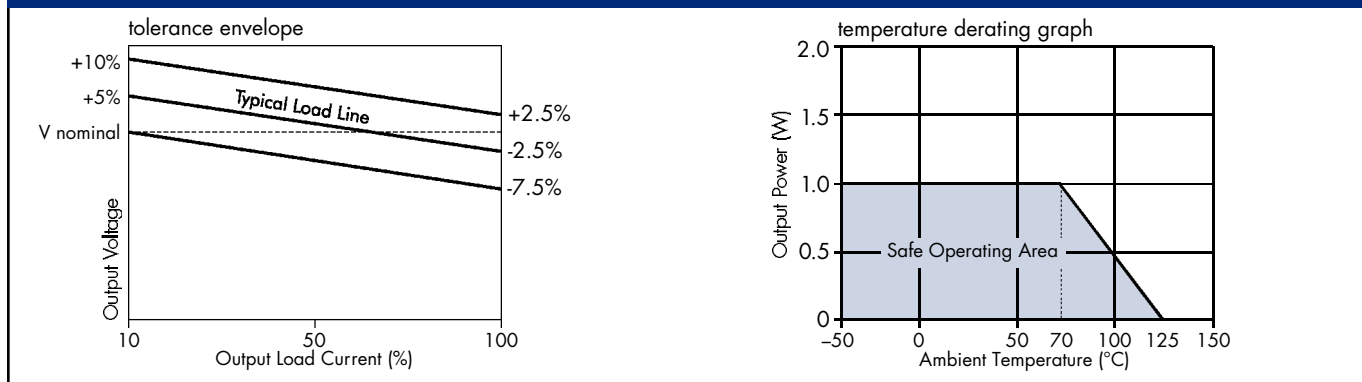

MECHANICAL DIMENSIONS

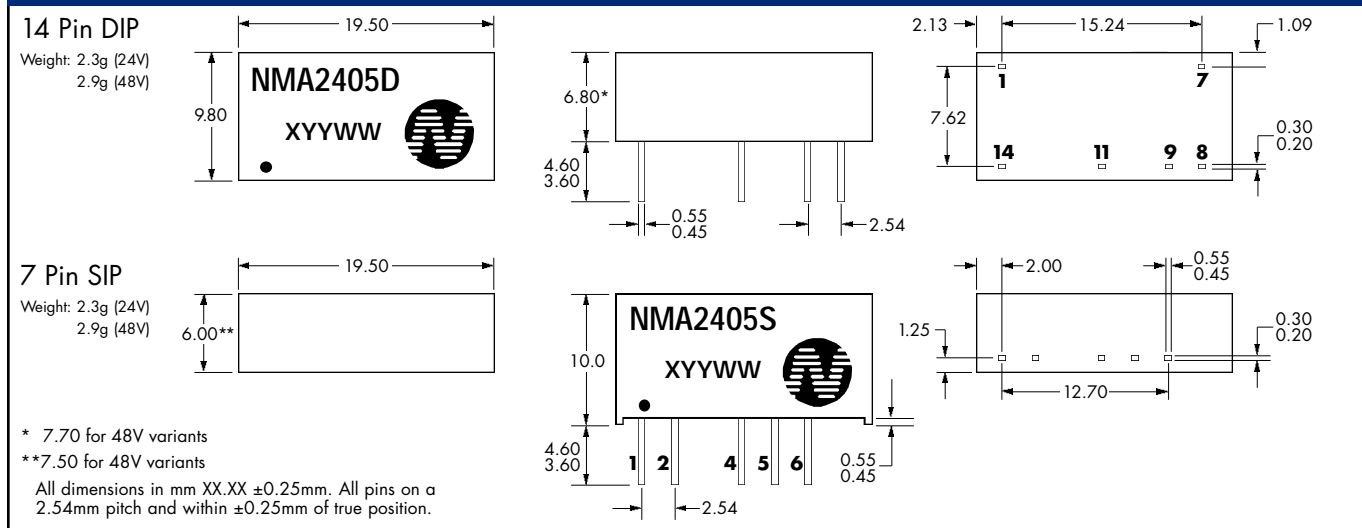

C&D Technologies (NCL) Limited reserve the right to alter or improve the specification, internal design or manufacturing process at any time, without notice. Please check with your supplier or visit our web site to ensure that you have the current and complete specification for your product before use.

© C&D Technologies (NCL) Limited 2000

NDC NMA2.2

No part of this publication may be copied, transmitted or stored in a retrieval system or reproduced in any way including, but not limited to, photography, photocopy, magnetic or other recording means, without prior written permission from C&D Technologies (NCL) Limited.

Instructions for use are available from www.dc-dc.com

C&D Technologies (NCL) Ltd

Tanners Drive, Blakelands North
Milton Keynes MK14 5BU, England
Tel: +44 (0)1908 615232
Fax: +44 (0)1908 617545
email: info@cdtechno-ncl.com

[www: http://www.dc-dc.com](http://www.dc-dc.com)

C&D Technologies (NCL), Inc.

8917 Glenwood Avenue, Raleigh
NC 27612, USA
Tel: +1 (919) 571-9405
Fax: +1 (919) 571-9262
email: info@us.cdtechno-ncl.com

C&D TECHNOLOGIES
Power Solutions