

## FEATURES

- BS EN 60950 Certified
- UL 1950 Recognised
- 6kVDC Isolation
- Dual Outputs
- Low Profile Package
- Efficiency to 80%
- Power Density 0.48W/cm<sup>3</sup>
- 5V & 12V Input
- 5V, 9V, 12V & 15V Output
- Footprint 4.75cm<sup>2</sup>
- UL 94V-0 Package Material
- No Heatsink required
- Internal SMD Construction
- Toroidal Magnetics
- Fully Encapsulated
- MTTF up to 1.0 Million Hours
- PCB Mounting
- Custom Solutions Available

## DESCRIPTION

The NMS Series of DC-DC Converters are UL 1950 recognised and fully certified to BS EN 60950, this makes them ideal for all Telecom and safety applications where approved isolation is required. The low profile package allows mounting in rack systems without risk of touching other boards. The output configuration allows all of the rated power to be drawn from a single pin provided the total load does not exceed 2 Watts. The devices feature low noise and low isolation capacitance suitable for applications in high noise environments, eg heavy electrical machine interface.

## SELECTION GUIDE

	Nominal Input Voltage	Output Voltage	Output Current	Efficiency	Isolation Capacitance	MTTF <sup>1</sup>
Order Code	(V)	(V)	(mA)	(%)	(pF)	kHrs
<b>NMS0505</b>	5	±5	±200	74	1.8	747
<b>NMS0509</b>	5	±9	±111	76	1.9	327
<b>NMS0512</b>	5	±12	±83	77	2.0	169
<b>NMS0515</b>	5	±15	±67	78	2.1	93
<b>NMS1205</b>	12	±5	±200	78	1.9	365
<b>NMS1209</b>	12	±9	±111	81	2.0	224
<b>NMS1212</b>	12	±12	±83	82	2.1	136
<b>NMS1215</b>	12	±15	±67	82	2.2	82

- i When operated **without** additional external load capacitance, the output voltage of the devices is guaranteed to be within 95% of its steady state value within 100ms after the input voltage has reached 95% of its steady state value, **irrespective of the rise time of the input voltage.**
- ii When operated **with** additional external load capacitance the rise time of the input voltage will determine the maximum external capacitance value for guaranteed start up. The slower the rise time of the input voltage the greater the maximum value of the additional external capacitance for reliable start up.

## INPUT CHARACTERISTICS

Parameter	Conditions	MIN	TYP	MAX	Units
Voltage Range	Continuous operation, 5V input types	4.5	5	5.5	V
	Continuous operation, 12V input types	10.8	12	13.2	

## OUTPUT CHARACTERISTICS

Parameter	Conditions	MIN	TYP	MAX	Units
Rated Power <sup>2</sup>	T <sub>A</sub> = 0°C to 70°C			2	W
Voltage Set Point Accuracy	See tolerance envelope	-7.5		10	%
Line Regulation	High V <sub>IN</sub> to low V <sub>IN</sub>		1.0	1.2	%/%
Load Regulation	10% load to rated load, 5V output types		10	15	%
	10% load to rated load, 9V output types		6	15	
	10% load to rated load, 12V output types		6	15	
	10% load to rated load, 15V output types		6	15	
Ripple & Noise	BW=DC to 20MHz, all output types			200	mV p-p

## ABSOLUTE MAXIMUM RATINGS

Short-circuit duration <sup>3</sup>	1 second
Internal power dissipation	900mW
Lead temperature 1.5mm from case for 10 seconds	300°C
Input voltage V <sub>IN</sub> , NMS05 types	7V
Input voltage V <sub>IN</sub> , NMS12 types	15V

1 Calculated using MIL-HDBK-217F with nominal input voltage at full load.

2 See derating curve

3 Supply voltage must be discontinued at the end of the short circuit duration.

All specifications typical at T<sub>A</sub>=25°C, nominal input voltage and rated output current unless otherwise specified.

# NMS SERIES

## 6kVDC Isolated 2W Dual Output DC-DC Converters

### ISOLATION CHARACTERISTICS

Parameter	Conditions	MIN	TYP	MAX	Units
Isolation Test Voltage	Flash tested for 1 second	6000			VDC
Resistance	Viso=500VDC		10		G


### GENERAL CHARACTERISTICS

Parameter	Conditions	MIN	TYP	MAX	Units
Switching Frequency	All input types		35		kHz


### TEMPERATURE CHARACTERISTICS

Parameter	Conditions	MIN	TYP	MAX	Units
Specification	All output types	0		70	°C
Storage		-50		130	°C
Case Temperature Above Ambient	All output types			32	°C
Cooling	Free air convection				

### PERFORMANCE CHARACTERISTICS

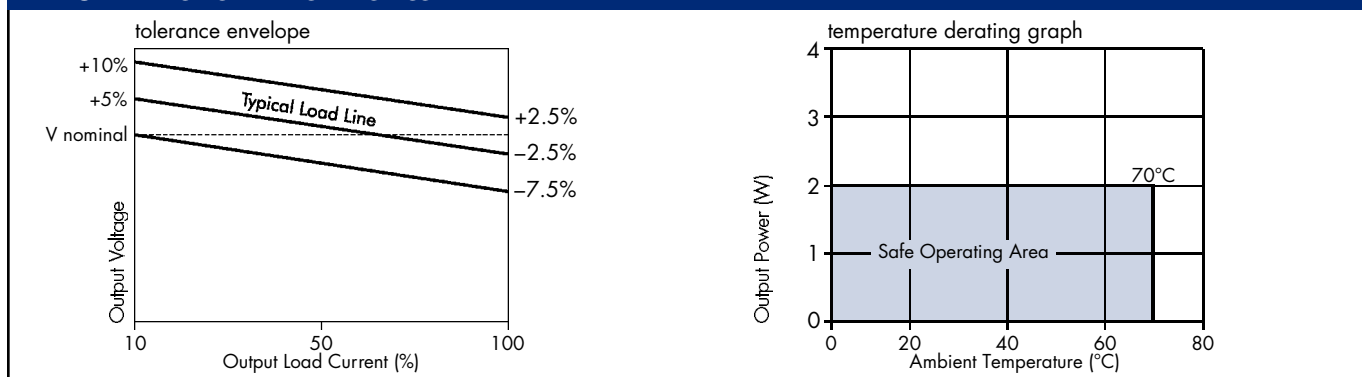

### MECHANICAL DIMENSIONS

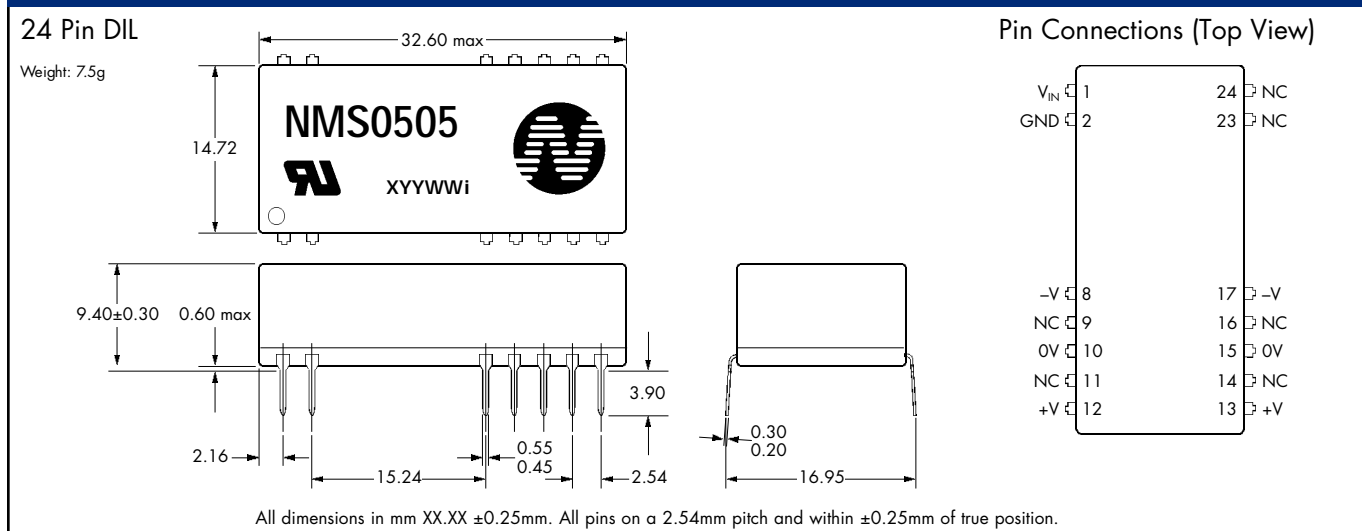

C&D Technologies (NCL) Limited reserve the right to alter or improve the specification, internal design or manufacturing process at any time, without notice. Please check with your supplier or visit our web site to ensure that you have the current and complete specification for your product before use.

© C&D Technologies (NCL) Limited 2000

NDC NMS.2

No part of this publication may be copied, transmitted or stored in a retrieval system or reproduced in any way including, but not limited to, photography, photocopy, magnetic or other recording means, without prior written permission from C&D Technologies (NCL) Limited.

Instructions for use are available from [www.dc-dc.com](http://www.dc-dc.com)

#### C&D Technologies (NCL) Ltd

Tanners Drive, Blakelands North  
Milton Keynes MK14 5BU, England  
Tel: +44 (0)1908 615232  
Fax: +44 (0)1908 617545  
email: [info@cdtechno-ncl.com](mailto:info@cdtechno-ncl.com)

[www: http://www.dc-dc.com](http://www.dc-dc.com)

#### C&D Technologies (NCL), Inc.

8917 Glenwood Avenue, Raleigh  
NC 27612, USA  
Tel: +1 (919) 571-9405  
Fax: +1 (919) 571-9262  
email: [info@us.cdtechno-ncl.com](mailto:info@us.cdtechno-ncl.com)

**C&D TECHNOLOGIES**  
Power Solutions