
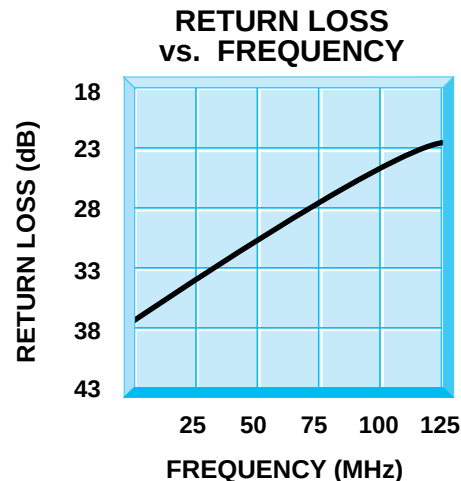
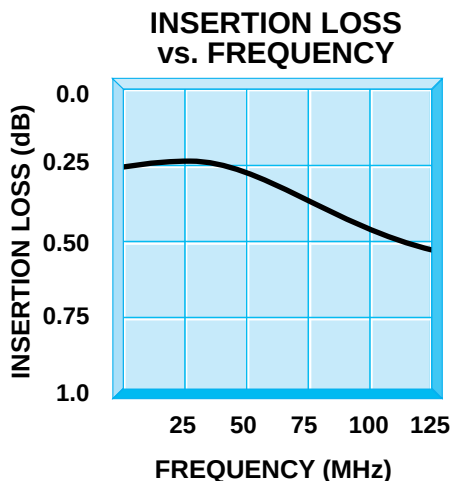


NJ-20002 / 20003 / 20005

1 to 100 MHz Two-Way 180° Power Dividers

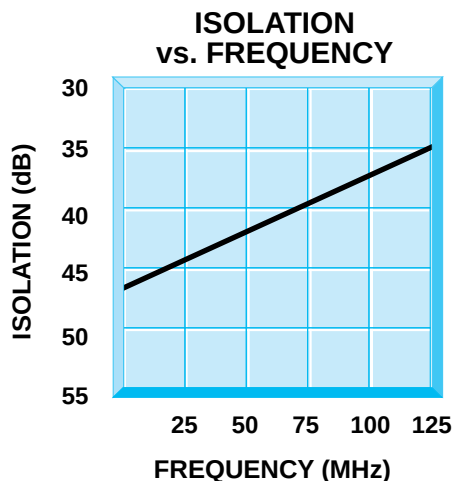


Guaranteed Specifications (-54° to +85°C)

Frequency Range	1 to 100 MHz
Isolation	30 dB Min.
Insertion Loss	0.75 dB Max.
VSWR	1.3:1 Max.
Phase Balance	±2° Max.
Amplitude Balance	± 0.2 dB Max.
Impedance	50 Ohms
Power Handling	3 Watts Max.


Functional Schematic

NJ-20002



Mechanical Outline

NJ-20002

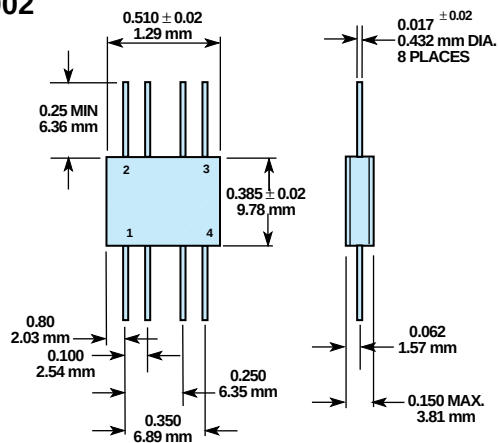


Additional Mechanical Outlines on next page

SIGNAL
TECHNOLOGY CORPORATION
OLEKTRON OPERATION


28 Tozer Road • Beverly, MA 01915-5579
Tel. 978.922.0019 • Fax 978.927.9328

1 to 100 MHz Two-Way 180° Power Dividers


NJ-20003

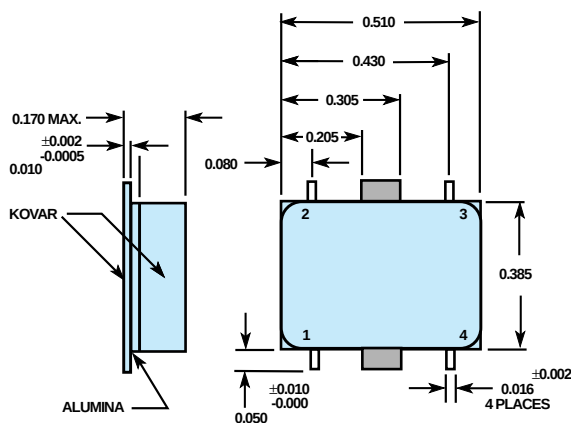

NJ-20005

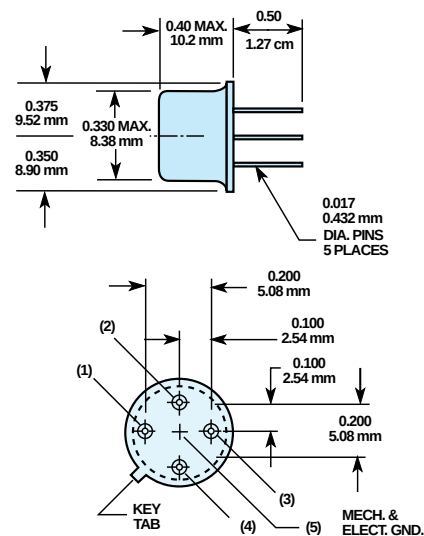

NJ-20003



NJ-20005

