

1500 V Miniature Hybrid Multiplier


10 nA Output Current

6 Stages

NV152P06

NV152N06





SURFACE MOUNT
ENCAPSULATED



ELECTRICAL CHARACTERISTICS AND MAXIMUM RATINGS

Part Number	Maximum A.C. Input Voltage	Maximum V_{in}	Maximum D.C. Output Voltage	Typical Output Current	Typical Frequency	# of Stages	Polarity
	V_{PP}	V_{DC}	V_{DC}	nA	kHz		
NV152P06	600	1000	+1500	10	40kHz	6	Positive
NV152N06	600	1000	-1500	10	40kHz	6	Negative

Operating Temp: -55°C to +100°C Storage Temp: -55°C to +100°C

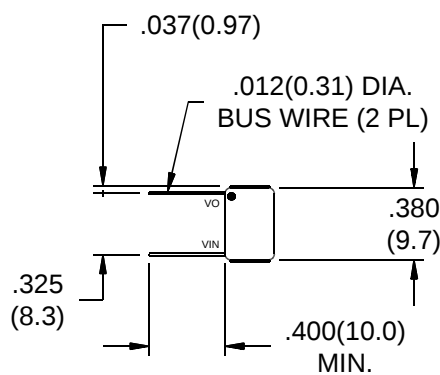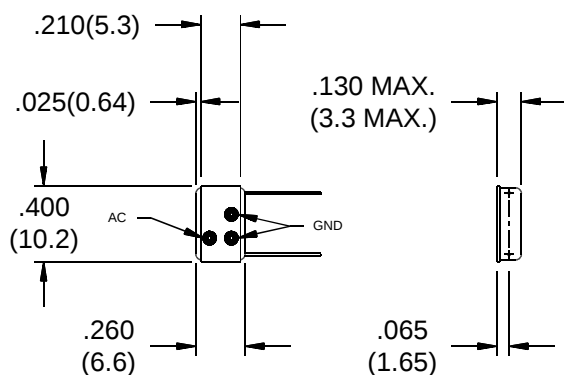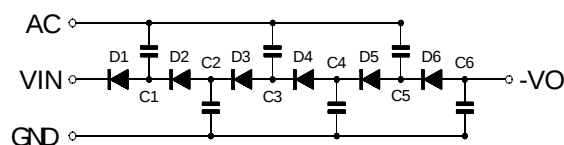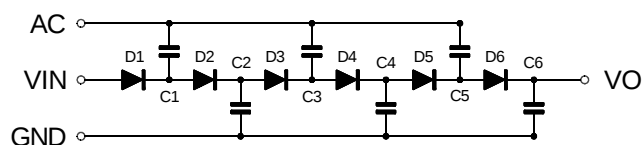

Dimensions: In. (mm) • All temperatures are ambient unless otherwise noted. • Data subject to change without notice.



VOLTAGE MULTIPLIERS INC.
8711 W. Roosevelt Ave.
Visalia, CA 93291

TEL 559-651-1402
FAX 559-651-0740
www.voltagemultipliers.com

1500 V Miniature Hybrid Multiplier


10 nA Output Current

6 Stages

NV152P06S

NV152N06S






SURFACE MOUNT
ENCAPSULATED



ELECTRICAL CHARACTERISTICS AND MAXIMUM RATINGS

Part Number	Maximum A.C. Input Voltage	Maximum V_{in}	Maximum D.C. Output Voltage	Typical Output Current	Typical Frequency	# of Stages	Polarity
	V_{PP}	V_{DC}	V_{DC}	nA	kHz		
NV152P06S	600	1000	+1500	10	40kHz	6	Positive
NV152N06S	600	1000	-1500	10	40kHz	6	Negative

Operating Temp: -55°C to +100°C Storage Temp: -55°C to +100°C

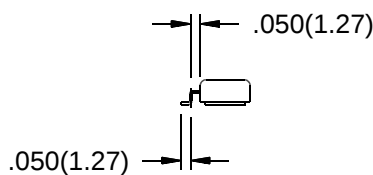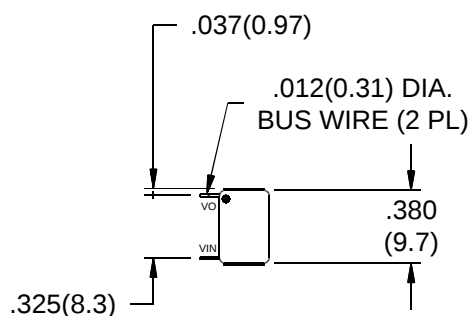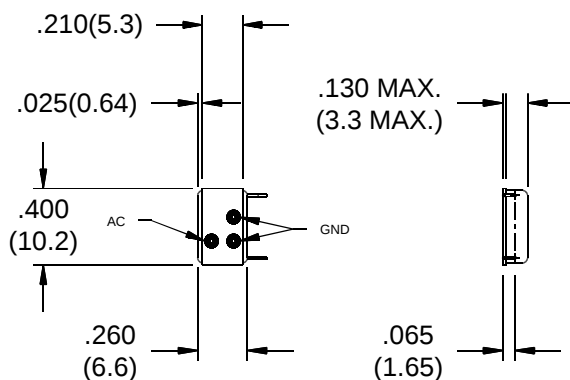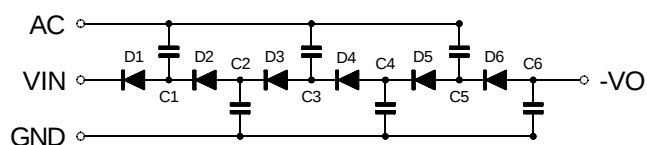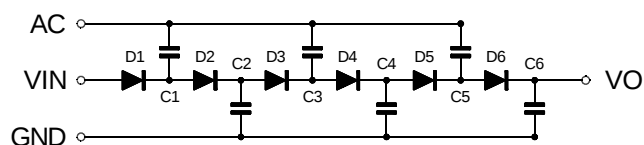

Dimensions: In. (mm) • All temperatures are ambient unless otherwise noted. • Data subject to change without notice.



VOLTAGE MULTIPLIERS INC.
8711 W. Roosevelt Ave.
Visalia, CA 93291

TEL 559-651-1402
FAX 559-651-0740
www.voltagemultipliers.com