

**1 550 nm InGaAsP MQW-DFB LASER DIODE MODULE  
CW LIGHT SOURCE FOR DWDM APPLICATIONS****DESCRIPTION**

The NX8562LB is a 1 550 nm Multiple Quantum Well (MQW) structured Distributed Feed-Back (DFB) laser diode module with Polarization Maintain Fiber (PMF).


It is designed as Continuous Wave (CW) light source and ideal for optical transmission systems with external modulators. The device is available for Dense Wavelength Division Multiplexing (DWDM) wavelengths based on ITU-T recommendations, enabling a wide range of applications.

**FEATURES**


- Output power  $P_r = 20 \text{ mW MIN.}$
- Available for DWDM wavelengths based on ITU-T recommendations (100 GHz grid, refer to the ORDERING INFORMATION)
- Internal thermo-electric cooler and isolator
- Hermetically sealed 14-pin butterfly package
- Polarization maintain fiber pigtail

The information in this document is subject to change without notice. Before using this document, please confirm that this is the latest version.  
Not all devices/types available in every country. Please check with local NEC representative for availability and additional information.

★ PACKAGE DIMENSIONS (UNIT: mm)

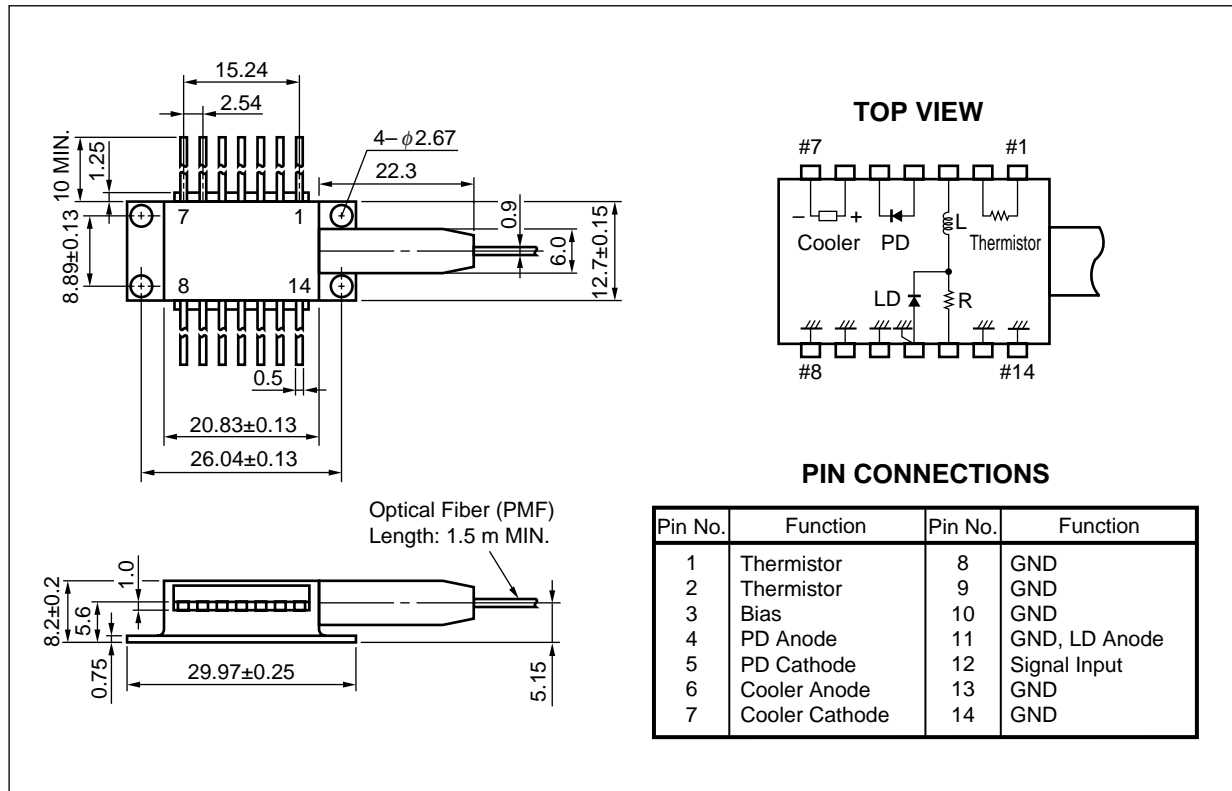

★ OPTICAL FIBER DIMENSIONS (UNIT: mm)

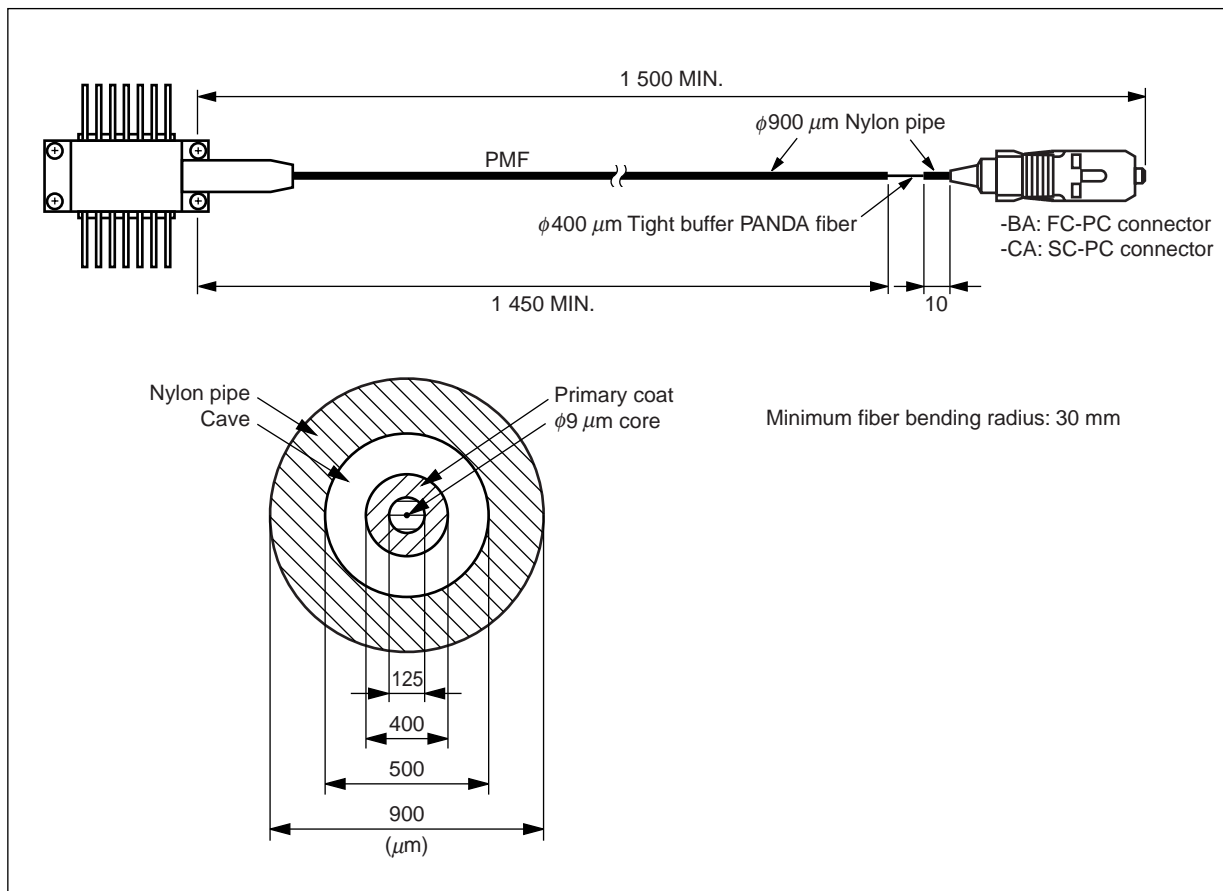

ORDERING INFORMATION

Part Number			ITU-T Wavelength <sup>*1</sup> (nm)	Frequency (THz)
Without Connector	With FC-PC Connector	With SC-PC Connector		
NX8562LB279	NX8562LB279-BA	NX8562LB279-CA	1527.99	196.20
NX8562LB287	NX8562LB287-BA	NX8562LB287-CA	1528.77	196.10
NX8562LB295	NX8562LB295-BA	NX8562LB295-CA	1529.55	196.00
NX8562LB303	NX8562LB303-BA	NX8562LB303-CA	1530.33	195.90
NX8562LB311	NX8562LB311-BA	NX8562LB311-CA	1531.11	195.80
NX8562LB318	NX8562LB318-BA	NX8562LB318-CA	1531.89	195.70
NX8562LB326	NX8562LB326-BA	NX8562LB326-CA	1532.68	195.60
NX8562LB334	NX8562LB334-BA	NX8562LB334-CA	1533.46	195.50
NX8562LB342	NX8562LB342-BA	NX8562LB342-CA	1534.25	195.40
NX8562LB350	NX8562LB350-BA	NX8562LB350-CA	1535.03	195.30
NX8562LB358	NX8562LB358-BA	NX8562LB358-CA	1535.82	195.20
NX8562LB366	NX8562LB366-BA	NX8562LB366-CA	1536.60	195.10
NX8562LB373	NX8562LB373-BA	NX8562LB373-CA	1537.39	195.00
NX8562LB381	NX8562LB381-BA	NX8562LB381-CA	1538.18	194.90
NX8562LB389	NX8562LB389-BA	NX8562LB389-CA	1538.97	194.80
NX8562LB397	NX8562LB397-BA	NX8562LB397-CA	1539.76	194.70
NX8562LB405	NX8562LB405-BA	NX8562LB405-CA	1540.55	194.60
NX8562LB413	NX8562LB413-BA	NX8562LB413-CA	1541.34	194.50
NX8562LB421	NX8562LB421-BA	NX8562LB421-CA	1542.14	194.40
NX8562LB429	NX8562LB429-BA	NX8562LB429-CA	1542.93	194.30
NX8562LB437	NX8562LB437-BA	NX8562LB437-CA	1543.73	194.20
NX8562LB445	NX8562LB445-BA	NX8562LB445-CA	1544.52	194.10
NX8562LB453	NX8562LB453-BA	NX8562LB453-CA	1545.32	194.00
NX8562LB461	NX8562LB461-BA	NX8562LB461-CA	1546.11	193.90
NX8562LB469	NX8562LB469-BA	NX8562LB469-CA	1546.91	193.80
NX8562LB477	NX8562LB477-BA	NX8562LB477-CA	1547.71	193.70
NX8562LB485	NX8562LB485-BA	NX8562LB485-CA	1548.51	193.60
NX8562LB493	NX8562LB493-BA	NX8562LB493-CA	1549.31	193.50
NX8562LB501	NX8562LB501-BA	NX8562LB501-CA	1550.11	193.40
NX8562LB509	NX8562LB509-BA	NX8562LB509-CA	1550.91	193.30
NX8562LB517	NX8562LB517-BA	NX8562LB517-CA	1551.72	193.20
NX8562LB525	NX8562LB525-BA	NX8562LB525-CA	1552.52	193.10
NX8562LB533	NX8562LB533-BA	NX8562LB533-CA	1553.32	193.00
NX8562LB541	NX8562LB541-BA	NX8562LB541-CA	1554.13	192.90

\*1 The value which omitted and computed the 3rd place below the decimal point

Part Number			ITU-T Wavelength*1 (nm)	Frequency (THz)
Without Connector	With FC-PC Connector	With SC-PC Connector		
NX8562LB549	NX8562LB549-BA	NX8562LB549-CA	1554.94	192.80
NX8562LB557	NX8562LB557-BA	NX8562LB557-CA	1555.74	192.70
NX8562LB565	NX8562LB565-BA	NX8562LB565-CA	1556.55	192.60
NX8562LB573	NX8562LB573-BA	NX8562LB573-CA	1557.36	192.50
NX8562LB581	NX8562LB581-BA	NX8562LB581-CA	1558.17	192.40
NX8562LB589	NX8562LB589-BA	NX8562LB589-CA	1558.98	192.30
NX8562LB597	NX8562LB597-BA	NX8562LB597-CA	1559.79	192.20
NX8562LB606	NX8562LB606-BA	NX8562LB606-CA	1560.60	192.10
NX8562LB614	NX8562LB614-BA	NX8562LB614-CA	1561.41	192.00
NX8562LB622	NX8562LB622-BA	NX8562LB622-CA	1562.23	191.90
NX8562LB630	NX8562LB630-BA	NX8562LB630-CA	1563.04	191.80
NX8562LB638	NX8562LB638-BA	NX8562LB638-CA	1563.86	191.70
NX8562LB646	NX8562LB646-BA	NX8562LB646-CA	1564.67	191.60
NX8562LB654	NX8562LB654-BA	NX8562LB654-CA	1565.49	191.50

\*1 The value which omitted and computed the 3rd place below the decimal point

# ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Ratings	Unit
Forward Current of LD	$I_F$	300	mA
Reverse Voltage of LD	$V_R$	2.0	V
Forward Current of PD	$I_F$	10	mA
Reverse Voltage of PD	$V_R$	20	V
Operating Case Temperature	$T_C$	-20 to +65	°C
Storage Temperature	$T_{stg}$	-40 to +85	°C
Lead Soldering Temperature	$T_{sld}$	260 (10 sec.)	°C

# ELECTRO-OPTICAL CHARACTERISTICS ( $T_{LD} = 25\text{ °C}$ , $T_C = -20\text{ to }+65\text{ °C}$ )

Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Laser Set Temperature	$T_{set}$		20		35	°C
Forward Voltage	$V_F$	$P_f = 20\text{ mW}$	0.9		1.5	V
Threshold Current	$I_{th}$			20	40	mA
Optical Output Power from Fiber	$P_f$	$I_F = 167\text{ mA}$ , $T_{LD} = T_{set}$	20			mW
Threshold Output Power	$P_{th}$	$I_F = I_{th}$			100	μW
Quantum Efficiency	$\eta$		0.13			W/A
Peak Emission Wavelength	$\lambda_p$	$P_f = 20\text{ mW}$ , CW, $T_{LD} = T_{set}$	1527.6	ITU-T <sup>*1</sup>	1565.6	nm
Spectral Line Width	$\Delta\nu$	$P_f = 20\text{ mW}$ , CW, 3 dB down		1	2	MHz
Side Mode Suppression Ratio	SMSR	$P_f = 20\text{ mW}$ , CW	30	35		dB
FM Response	$\eta_{FM}$	$P_f = 20\text{ mW}$	50	70		MHz/mA
Relative Intensity Noise	RIN	$P_f = 20\text{ mW}$ , 20 MHz to 3 GHz			-150	dB/Hz
Flat frequency response	$f_m$	$P_f = 20\text{ mW}$ , +/-3 dB	1.8			GHz
Polarization Extinction Ratio <sup>*2</sup>	ext	$P_f = 20\text{ mW}$ , CW	15	20		dB

\*1 Available for DWDM wavelengths based on ITU-T recommendation.

Please refer to the ORDERING INFORMATION.


\*2 Polarization state of LD is aligned parallel to the slow axis.

# ELECTRO-OPTICAL CHARACTERISTICS

(Applicable to Monitor PD:  $T_{LD} = 25\text{ }^{\circ}\text{C}$ ,  $T_c = -20\text{ to }+65\text{ }^{\circ}\text{C}$ )

Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Monitor Current	$I_m$	$P_f = 20\text{ mW}$ , $V_R = 5\text{ V}$	100		2 000	$\mu\text{A}$
Dark Current	$I_D$	$V_R = 5\text{ V}$		2	10	nA
Tracking Error	$\gamma^{*1}$	$I_m = \text{const.}$			0.5	dB

$$*1 \quad \gamma = \left| 10 \log \frac{P_f}{20\text{ mW}} \right|$$





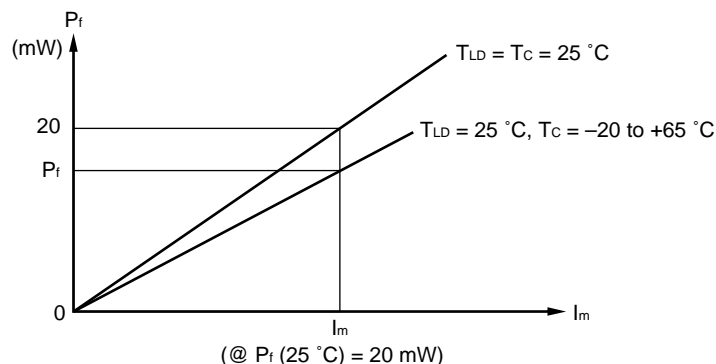


# ELECTRO-OPTICAL CHARACTERISTICS

(Applicable to Thermistor and TEC:  $T_{LD} = 25\text{ }^{\circ}\text{C}$ ,  $T_c = -20\text{ to }+65\text{ }^{\circ}\text{C}$ )

Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Thermistor Resistance	$R$	$T_{LD} = 25\text{ }^{\circ}\text{C}$	9.5	10.0	10.5	$\text{k}\Omega$
B Constant	$B$		3 350	3 450	3 550	K
Cooler Current	$I_c$	$\Delta T = 65 - T_{\text{set}}$ , $P_f = 20\text{ mW}$			1.0	A
Cooler Voltage	$V_c$	$\Delta T = 65 - T_{\text{set}}$ , $P_f = 20\text{ mW}$			2.0	V

**TYPICAL CHARACTERISTICS ( $T_c = 25\text{ }^{\circ}\text{C}$ , unless otherwise specified)**

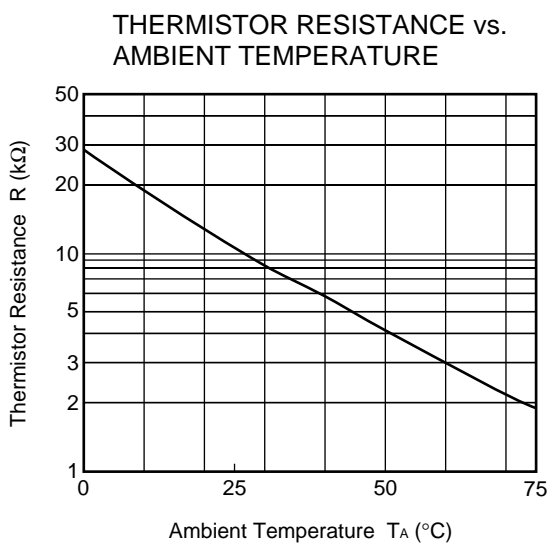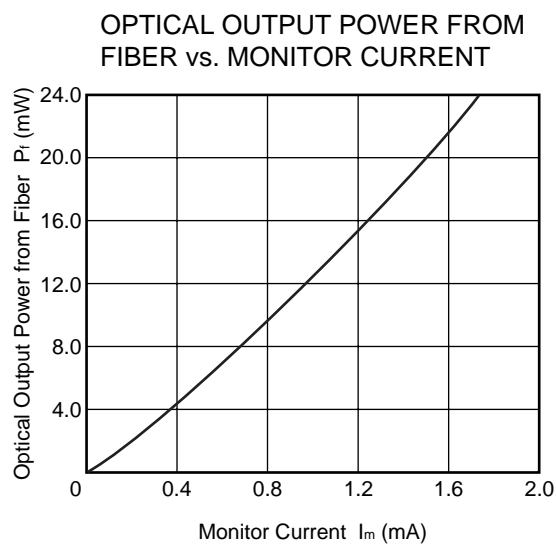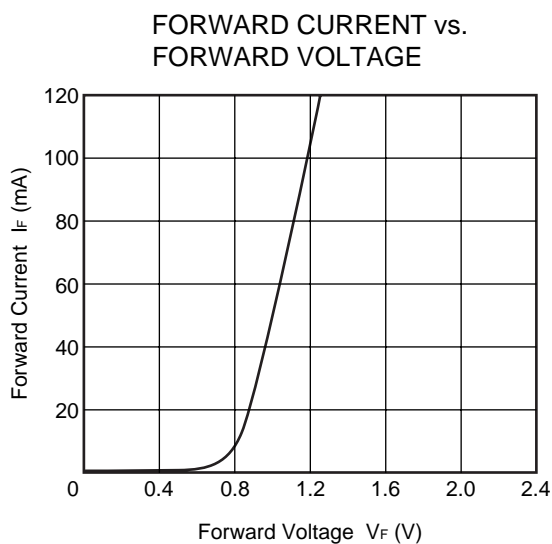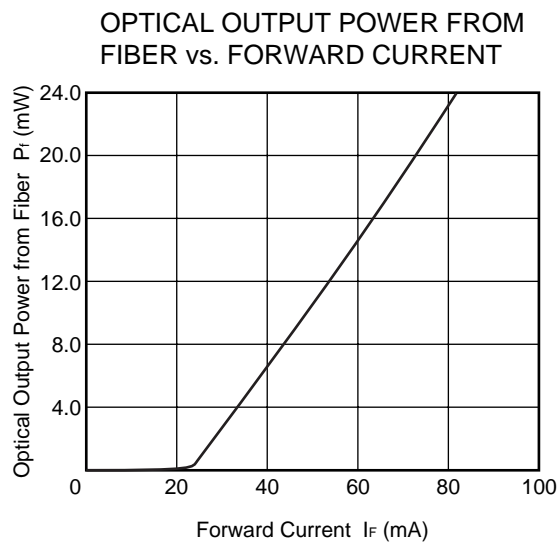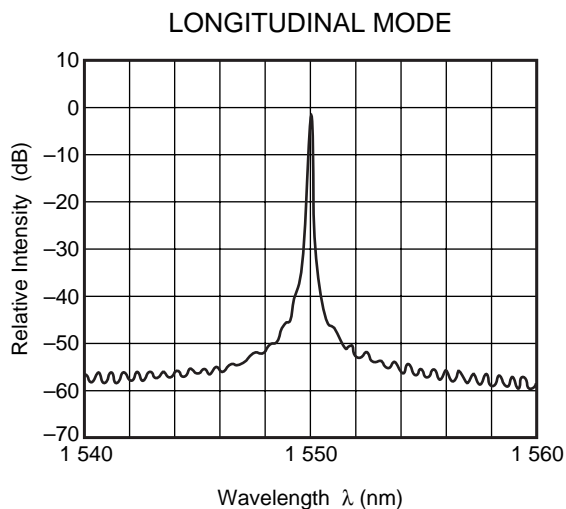

**Remark** The graphs indicate nominal characteristics.



DFB-LD FAMILY

Part Number	Absolute Maximum Ratings		Electro-Optical Characteristics (T <sub>c</sub> = 25 °C)			Application	Package
	T <sub>c</sub> (°C)	T <sub>stg</sub> (°C)	I <sub>th</sub> (mA)	P <sub>f</sub> (mW)	λ <sub>p</sub> (nm)		
			TYP.	MIN.	TYP.		
NX8300BE-CC NX8300CE-CC	0 to +75	−40 to +85	15	2 <sup>*1</sup>	1 310	2.5 Gb/s: STM-16 (S-16.1, L-16.1)	Coaxial
NX8303BG-CC	−10 to +85	−40 to +85	15	2 <sup>*1</sup>	1 310	622 Mb/s: STM-4 (L-4.1)	Coaxial
NX8503BG-CC	−10 to +85	−40 to +85	15	2 <sup>*1</sup>	1 550	156 Mb/s: STM-1 (L-1.2, L-1.3)	Coaxial
						622 Mb/s: STM-4 (L-4.2, L-4.3)	
NX8504BE-CC NX8504CE-CC	−10 to +85	−40 to +85	15	2 <sup>*1</sup>	1 550	622 Mb/s: STM-4 (L-4.2, L-4.3)	Coaxial
★ NX8560LJ-CC	−20 to +70	−40 to +85	6	−2 dBm	1 550 <sup>*2</sup>	≤ 10 Gb/s: STM-64	BFY with GPO
NX8562LB	−20 to +65	−40 to +85	20	20	1 550 <sup>*2</sup>	CW Light Source for external modulator	BFY
NX8563LB	−20 to +65	−40 to +85	20	10	1 550 <sup>*2</sup>	CW Light Source for external modulator	BFY
NX8564LE-CC	−20 to +70	−40 to +85	7	0.6 <sup>*1</sup>	1 550 <sup>*2</sup>	2.5 Gb/s: STM-16 EA modulator integrated	BFY
NX8565LE-CC	−20 to +70	−40 to +85	7	0.6 <sup>*1</sup>	1 550 <sup>*2</sup>	2.5 Gb/s: STM-16 EA modulator integrated	BFY
NX8570SA	−20 to +70	−40 to +85	20	20	1 550 <sup>*2</sup>	CW Light Source with λ monitoring PD	BFY

\*1 TYP.


\*2 Available for DWDM Wavelength based on ITU-T recommendation

**REFERENCE**


Document Name	Document No.
NEC semiconductor device reliability/quality control system	C11159E
Quality grades on NEC semiconductor devices	C11531E
Semiconductor device mounting technology manual	C10535E
SEMICONDUCTOR SELECTION GUIDE Products & Packages (CD-ROM)	X13769X

## CAUTION

Within this device there exists GaAs (Gallium Arsenide) material which is a harmful substance if ingested. Please do not under any circumstances break the hermetic seal.



### SEMICONDUCTOR LASER



### NEC Corporation

NEC Building, 7-1, Shiba 5-chome,  
Minato-ku, Tokyo 108-01, Japan

Type number: \_\_\_\_\_

Manufactured: \_\_\_\_\_

Serial Number: \_\_\_\_\_

This product conforms to FDA  
regulations as applicable  
to standards 21 CFR Chapter 1.  
Subchapter J.

The export of this product from Japan is prohibited without governmental license. To export or re-export this product from a country other than Japan may also be prohibited without a license from that country. Please call an NEC sales representative.

- **The information in this document is current as of April, 2001. The information is subject to change without notice. For actual design-in, refer to the latest publications of NEC's data sheets or data books, etc., for the most up-to-date specifications of NEC semiconductor products. Not all products and/or types are available in every country. Please check with an NEC sales representative for availability and additional information.**
  - No part of this document may be copied or reproduced in any form or by any means without prior written consent of NEC. NEC assumes no responsibility for any errors that may appear in this document.
  - NEC does not assume any liability for infringement of patents, copyrights or other intellectual property rights of third parties by or arising from the use of NEC semiconductor products listed in this document or any other liability arising from the use of such products. No license, express, implied or otherwise, is granted under any patents, copyrights or other intellectual property rights of NEC or others.
  - Descriptions of circuits, software and other related information in this document are provided for illustrative purposes in semiconductor product operation and application examples. The incorporation of these circuits, software and information in the design of customer's equipment shall be done under the full responsibility of customer. NEC assumes no responsibility for any losses incurred by customers or third parties arising from the use of these circuits, software and information.
  - While NEC endeavours to enhance the quality, reliability and safety of NEC semiconductor products, customers agree and acknowledge that the possibility of defects thereof cannot be eliminated entirely. To minimize risks of damage to property or injury (including death) to persons arising from defects in NEC semiconductor products, customers must incorporate sufficient safety measures in their design, such as redundancy, fire-containment, and anti-failure features.
  - NEC semiconductor products are classified into the following three quality grades:  
 "Standard", "Special" and "Specific". The "Specific" quality grade applies only to semiconductor products developed based on a customer-designated "quality assurance program" for a specific application. The recommended applications of a semiconductor product depend on its quality grade, as indicated below. Customers must check the quality grade of each semiconductor product before using it in a particular application.  
 "Standard": Computers, office equipment, communications equipment, test and measurement equipment, audio and visual equipment, home electronic appliances, machine tools, personal electronic equipment and industrial robots  
 "Special": Transportation equipment (automobiles, trains, ships, etc.), traffic control systems, anti-disaster systems, anti-crime systems, safety equipment and medical equipment (not specifically designed for life support)  
 "Specific": Aircraft, aerospace equipment, submersible repeaters, nuclear reactor control systems, life support systems and medical equipment for life support, etc.
- The quality grade of NEC semiconductor products is "Standard" unless otherwise expressly specified in NEC's data sheets or data books, etc. If customers wish to use NEC semiconductor products in applications not intended by NEC, they must contact an NEC sales representative in advance to determine NEC's willingness to support a given application.
- (Note)
- (1) "NEC" as used in this statement means NEC Corporation and also includes its majority-owned subsidiaries.
- (2) "NEC semiconductor products" means any semiconductor product developed or manufactured by or for NEC (as defined above).