


NetLight[®] NLT02-80-PA 155 Mbits/s 1550 nm Laser Transceiver for Extended Long Reach

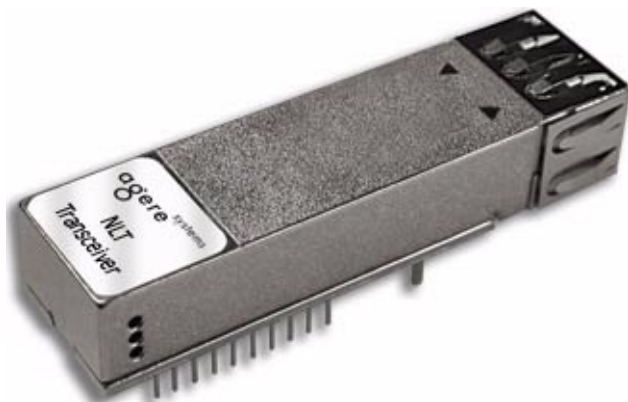

Available in a small form-factor, metal package with LC receptacle connector, the NLT02-80-PA transceiver is a high-performance, cost-effective, optical transceiver for SONET/SDH applications.

Features

- Small form-factor, 20-pin package
- LC duplex receptacle
- Uncooled 1550 nm DFB laser transmitter with automatic output power control
- Transmitter disable input
- Wide dynamic range receiver with InGaAs PIN photodetector
- Laser bias and back-facet PIN monitors
- LVPECL signal-detect output
- Low power dissipation
- Single 3.3 V power supply
- LVPECL compatible data inputs and outputs
- Operating temperature range of -40°C to $+85^{\circ}\text{C}$
- Telecom reliability (GR-468-CORE RT)
- Wave solderable and aqueous wash compatible

Applications

- SONET LR-2 OC-3, ITU L-1.2 80 km applications

Description

The NLT02-80-PA transceiver is a high-speed, cost-effective optical transceiver that is intended for 155 Mbits/s SONET LR-2 OC-3 and ITU L-1.2 80 km applications. The transceiver features Agere Systems' optics and is packaged in a narrow-width metal housing with an LC duplex receptacle. The 20-pin package pinout conforms to a multisource transceiver agreement.

The transmitter features the ability to interface to LVPECL differential logic level data inputs. The transmitter also features an LVTTTL logic level disable input, and laser bias and back-facet monitor outputs. The receiver features differential LVPECL logic level data outputs, an LVPECL logic level signal-detect output, and direct access to the PIN photodetector bias input for photocurrent monitoring purposes.

Absolute Maximum Ratings

Stresses in excess of the absolute maximum ratings can cause permanent damage to the device. These are absolute stress ratings only. Functional operation of the device is not implied at these or any other conditions in excess of those given in the operations sections of the data sheet. Exposure to absolute maximum ratings for extended periods can adversely affect device reliability.

Table 1. Absolute Maximum Ratings

Parameter	Symbol	Min	Max	Unit
Supply Voltage	VCC	0	5	V
Operating Case Temperature Range	T _C	−40	85	°C
Storage Temperature Range	T _S	−40	85	°C
Lead Soldering Temperature/Time	—	—	260/10	°C/s
Operating Wavelength Range	λ	1.2	1.6	μm

Pin Information

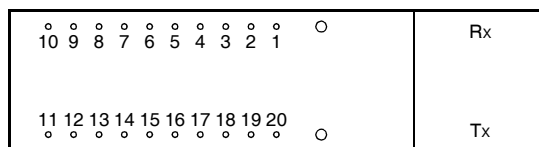


Figure 1. Top View of the NLT02-80-PA Transceiver, 20-Pin Configuration

Table 2. Receiver Pin Descriptions

Pin #	Symbol	Functional Description	Logic Family
MS	MS	Mounting Studs. The mounting studs are provided for transceiver mechanical attachment to the circuit board. They can also provide an optional connection of the transceiver to the equipment chassis ground.	NA
1	VPD	Photodetector Bias Input. This lead supplies bias for the PIN photodetector diode.	NA
2	VEER	Receiver Signal Ground.	NA
3	VEER	Receiver Signal Ground.	NA
4	NIC	No Internal Connection.	NA
5	NIC	No Internal Connection.	NA
6	VEER	Receiver Signal Ground.	NA
7	VCCR	Receiver Power Supply.	NA
8	SD	Signal Detect. Normal operation: logic one output. Fault condition: logic zero output.	LVTTTL
9	RD−	Received Data Out.	LVPECL
10	RD+	Received Data Out.	LVPECL

Pin Information (continued)**Table 3. Transmitter Pin Descriptions**

Pin #	Symbol	Functional Description	Logic Family
11	VCCT	Transmitter Power Supply.	NA
12	VEET	Transmitter Signal Ground.	NA
13	TDIS	Transmitter Disable.	LVTTTL
14	TD+	Transmitter Data In.	LVPECL
15	TD–	Transmitter Data In.	LVPECL
16	VEET	Transmitter Signal Ground.	NA
17	BMON(–)	Laser Diode Bias Current Monitor—Negative End. Optional feature. If feature is not used, do not connect. The laser bias current is accessible as a dc voltage by measuring the voltage developed across pins 17 and 18.	NA
18	BMON(+)	Laser Diode Bias Current Monitor—Positive End. Optional feature. If feature is not used, do not connect. See pin 17 description.	NA
19	PMON(–)	Laser Diode Optical Power Monitor—Negative End. Optional feature. If feature is not used, do not connect. The back-facet diode monitor current is accessible as a voltage proportional to the photocurrent through a 200 Ω resistor between pins 19 and 20.	NA
20	PMON(+)	Laser Diode Optical Power Monitor—Positive End. Optional feature. If feature is not used, do not connect. See pin 19 description.	NA

Electrostatic Discharge

Caution: This device is susceptible to damage as a result of electrostatic discharge (ESD). Take proper precautions during both handling and testing. Follow EIA® Standard EIA-625.

Although protection circuitry is designed into the device, take proper precautions to avoid exposure to ESD.

Agere Systems employs a human-body model (HBM) for ESD susceptibility testing and protection-design evaluation. ESD voltage thresholds are dependent on the critical parameters used to define the model. A standard HBM (resistance = 1.5 k Ω , capacitance = 100 pF) is widely used and, therefore, can be used for comparison purposes. The HBM ESD threshold established for the NLT02-80-PA is ± 1000 V.

Application Information

The NLT receiver section is a highly sensitive fiber-optic receiver. Although the data outputs are digital logic levels, the device should be thought of as an analog component. When laying out system application boards, the NLT transceiver should receive the same type of consideration given to a sensitive analog component.

Printed-Wiring Board Layout Considerations

A fiber-optic receiver employs a very high gain, wide-bandwidth transimpedance amplifier. This amplifier detects and amplifies signals that are only tens of nA in amplitude when the receiver is operating near its sensitivity limit. Any unwanted signal currents that couple into the receiver circuitry cause a decrease in the receiver's sensitivity and can also degrade the performance of the receiver's signal-detect (SD) circuit.

Application Information (continued)

Printed-Wiring Board Layout Considerations (continued)

To minimize the coupling of unwanted noise into the receiver, careful attention must be given to the printed-wiring board.

At a minimum, a double-sided printed-wiring board (PWB) with a large component-side ground plane beneath the transceiver must be used. In applications that include many other high-speed devices, a multi-layer PWB is highly recommended. This permits the placement of power and ground on separate layers, which allows them to be isolated from the signal lines.

Multilayer construction also permits the routing of sensitive signal traces away from high-level, high-speed signal lines. To minimize the possibility of coupling noise into the receiver section, high-level, high-speed signals such as transmitter inputs and clock lines should be routed as far away as possible from the receiver pins.

Noise that couples into the receiver through the power supply pins can also degrade performance. It is recommended that the pi filter, shown in Figure 2, be used for both the transmitter and receiver power supplies.

Data and Signal-Detect Outputs

Due to the high switching speeds of LVPECL outputs, transmission line design must be used to interconnect components. To ensure optimum signal fidelity, both data and clock outputs should be terminated identically. The signal lines connecting the data outputs to the next device should be equal in length and have matched impedances. Controlled-impedance stripline or microstrip construction must be used to preserve the quality of the signal into the next component and to minimize reflections back into the receiver, which could degrade its performance. Excessive ringing due to reflections caused by improperly terminated signal lines makes it difficult for the component receiving these signals to decipher the proper logic levels and can cause transitions to occur where none were intended. Also, by minimizing high-frequency ringing, possible EMI problems can be avoided.

The signal-detect output is positive LVPECL logic. A logic low at this output indicates that the optical signal into the receiver has been interrupted or that the light level has fallen below the minimum signal-detect threshold. This output should not be used as an error rate indicator since its switching threshold is determined only by the magnitude of the incoming optical signal.

Transceiver Processing

When the process plug is placed in the transceiver's optical port, the transceiver and plug can withstand normal wave soldering and aqueous spray cleaning processes. However, the transceiver is not hermetic, and should not be subjected to immersion in cleaning solvents. The transceiver case should not be exposed to temperatures in excess of 125 °C. The transceiver pins can be wave soldered at 260 °C for up to 10 seconds. The process plug should only be used once. After removing the process plug from the transceiver, it must not be used again as a process plug; however, if it has not been contaminated, it can be reused as a dust cover.

Transceiver Optical and Electrical Characteristics

Table 4. Transmitter Optical and Electrical Characteristics ($T_C = -40\text{ }^{\circ}\text{C}$ to $+85\text{ }^{\circ}\text{C}$, $V_{CC} = 3.135\text{ V}$ — 3.465 V . All parameters must meet the specifications over the entire lifetime.)

Parameter	Symbol	Min	Max	Unit
Average Optical Output Power (EOL)	P_o	-5	0	dBm
Optical Wavelength	λ_c	1480	1580	nm
Side-mode Suppression Ratio	SMSR	30	—	dB
Dynamic Extinction Ratio	EXT	10	—	dB
Output Optical Eye	Compliant with SONET GR-253-CORE and ITU-T G.957 Eye Mask Requirements			
Power Supply Current	$I_{CC T}$	—	150	mA
Input Data Voltage: High Low	V_{IH} V_{IL}	$V_{CC} - 1.165$ $V_{CC} - 1.810$	$V_{CC} - 0.880$ $V_{CC} - 1.475$	V V
Transmit Disable Voltage ¹	V_D	$V_{CC} - 0.9$	V_{CC}	V
Transmit Enable Voltage ¹	V_{EN}	V_{EE}	$V_{EE} + 0.8$	V
Transmit Enable Time	T_{EN}	—	1	ms
Transmit Disable Time	T_{DIS}	—	10	μs
Laser Bias Voltage	V_{BIAS}	0.0	0.7	V
Laser Back-facet Monitor Voltage	V_{BF}	0.01	0.2	V

1. TTL compatible interface.

Table 5. Receiver Optical and Electrical Characteristics ($T_C = -40\text{ }^{\circ}\text{C}$ to $+85\text{ }^{\circ}\text{C}$, $V_{CC} = 3.135\text{ V}$ — 3.465 V)

Parameter	Symbol	Min	Max	Unit
Average Sensitivity ¹	P_I	—	-34	dBm
Maximum Input Power ¹	P_{MAX}	-10	—	dBm
Power Supply Current	$I_{CC R}$	—	150	mA
Output Data Voltage: High Low	V_{OH} V_{OL}	$V_{CC} - 1.025$ $V_{CC} - 1.810$	$V_{CC} - 0.880$ $V_{CC} - 1.620$	V V
Signal-detect Switching Threshold Assert Deassert	LSTD LSTI	-45 —	-35 -34.5	dBm dBm
Signal-detect Hysteresis	HYS	0.5	6	dB
Signal-detect Voltage Low High	V_{OL} V_{OH}	— $V_{CC} - 1.2$	$V_{CC} - 1.7$ —	V V
Signal-detect Response Time	SDRT	—	100	μs

1. $2^{23} - 1$ PRBS with a BER of 1×10^{-10} .

Qualification and Reliability


To help ensure high product reliability and customer satisfaction, Agere Systems is committed to an intensive quality program that starts in the design phase and proceeds through the manufacturing process. Optoelectronic modules are qualified to ITU GR-468-CORE remote terminal standards, using sampling techniques consistent with *Telcordia Technologies*™ requirements.

In addition, Agere Systems design, development, and manufacturing facilities have been certified to be in full compliance with the latest *ISO*®-9001 Quality System Standards.

Table 6. Regulatory Compliance

Feature	Test Method	Performance
Laser Eye Safety	U.S. 21 CFR (J) 1040.10 and 1040.11, <i>IEC</i> ® 60825-1 1988, <i>IEC</i> 60825-2 1997	CDRH compliant and Class 1 laser safe
Electrostatic Discharge (ESD) to Electrical Pins	MIL-STD 883C, Method 3015.4	Class 1 (>1000 V)
Electrostatic Discharge (ESD) to Optical Connector	<i>IEC</i> 61000-4-2; 1999	Withstand discharges of 15 kV using an air-discharge probe
Electromagnetic Interference (EMI)	FCC Part 15 Subpart J Class B, CISPR 22: 1997; EN 55022: 1998 Class B, VCCI Class I	Compliant with standards
Immunity	<i>IEC</i> 61000-4-3-1998	Less than 1 dB change in receiver sensitivity with field strength of 3 V/m RMS, from 10 MHz to 1 GHz
Component	<i>UL</i> ® 1950, CSA C22.2 #950, <i>IEC</i> 60950: 1999	—
Flammability	<i>UL</i> 94 V-0	—

Electrical Schematic

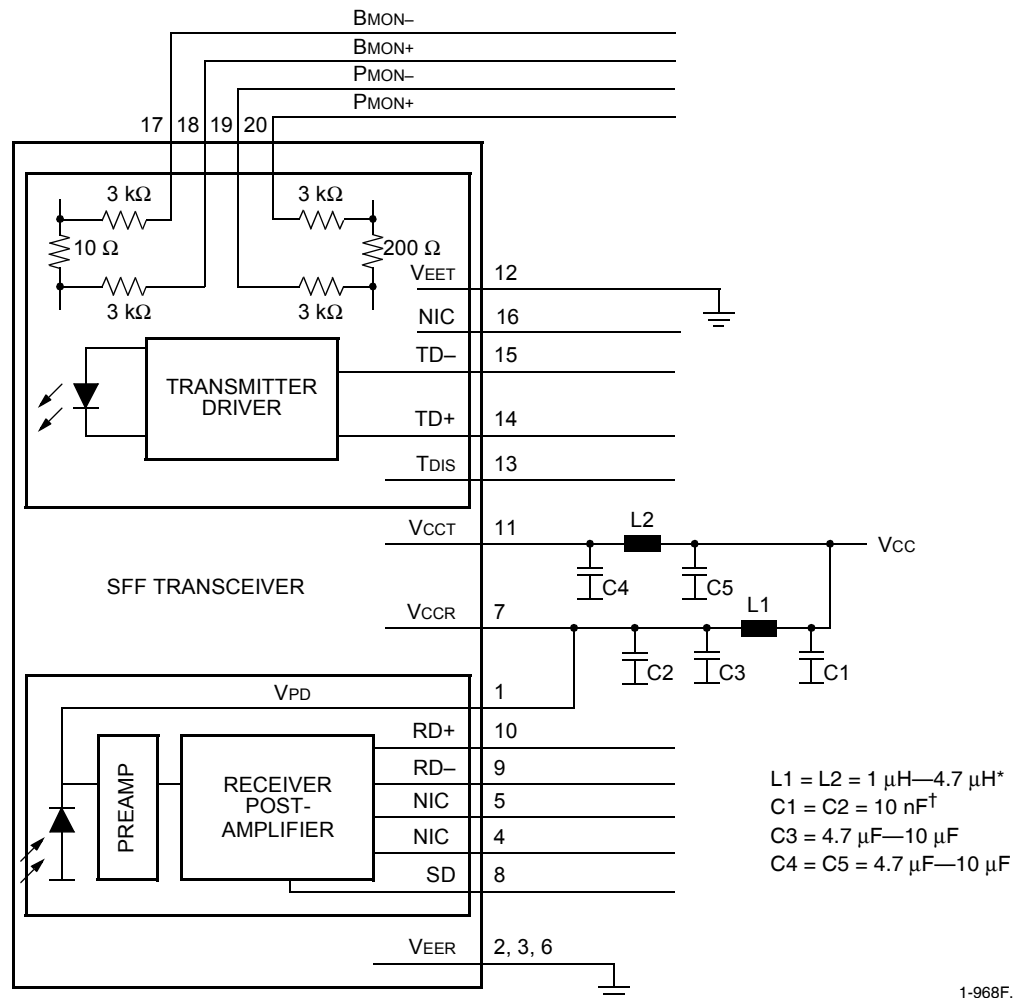


* Ferrite beads can be used as an option.


† For all capacitors, MLC caps are recommended.

Figure 2. Power Supply Filtering for the Small Form-Factor Transceiver

Application Schematics

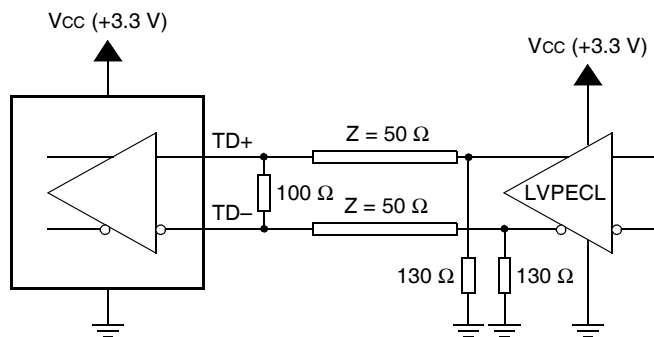

A. Transmitter Interface (LVPECL to LVPECL)

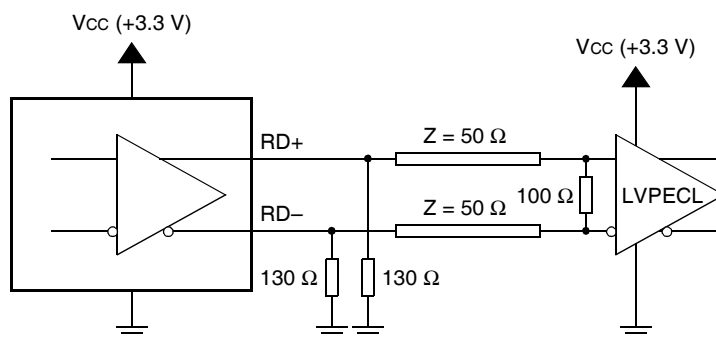


B. Receiver Interface (LVPECL to LVPECL)

Figure 3. 3.3 V Transceiver Interface with 3.3 V ICs

Outline Diagrams


Package Outline

Dimensions are in inches and (millimeters).

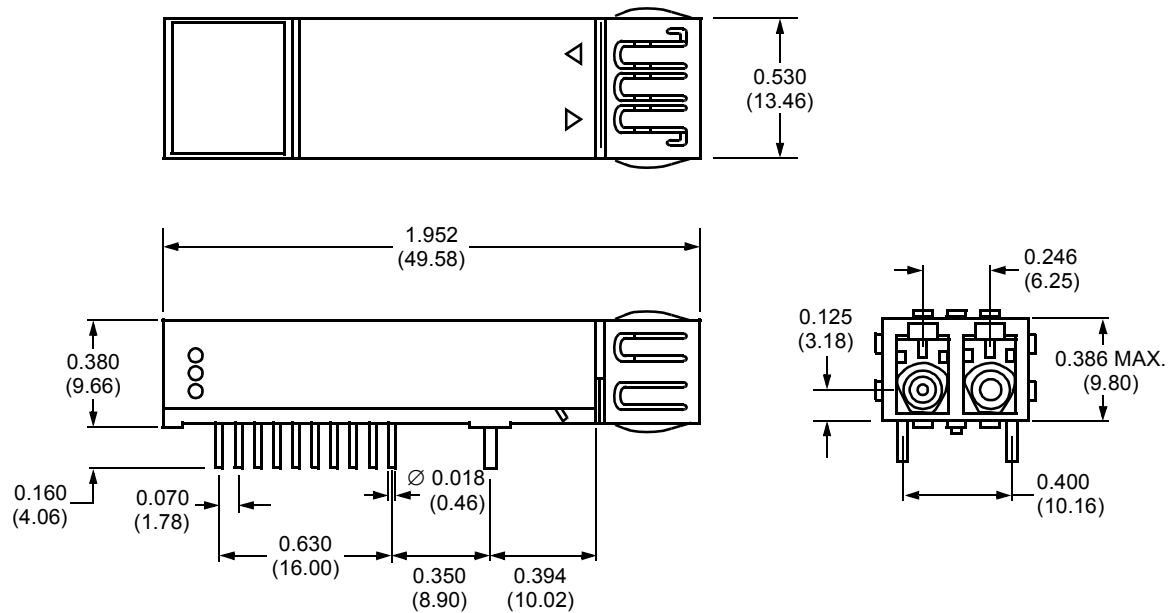

Recommended Panel Opening

Dimensions in millimeters and (inches).

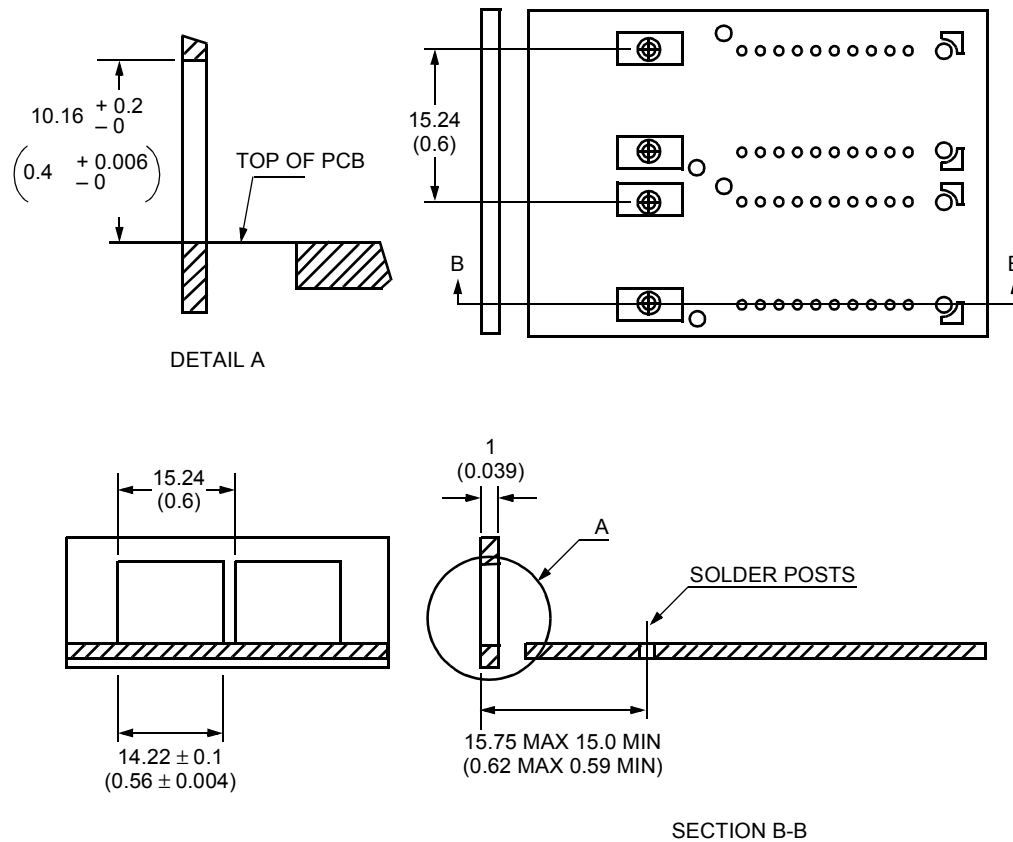

Laser Safety Information

Class I Laser Product

All versions of the transceiver are Class I laser products per CDRH, 21 CFR 1040 Laser Safety requirements. All versions are Class I laser products per IEC 60825-2:1997. The transceiver will be classified with the FDA.

CAUTION: Use of controls, adjustments, and procedures other than those specified herein may result in hazardous laser radiation exposure.

This product complies with 21 CFR 1040.10 and 1040.11.

Wavelength = 1550 nm

Maximum power = 1.58 mW

Product is not shipped with power supply.

NOTICE

Unterminated optical connectors can emit laser radiation.

Do not view with optical instruments.

Ordering Information

Table 7. Ordering Information

Description	Device Code	Comcode
2 x 10 155 Mbits/s 1550 nm laser transceiver for extended long-reach applications	NLT02-80-PA	700010603

EIA is a registered trademark of the Electronic Industries Association.

IEC is a registered trademark of The International Electrotechnical Commission.

Telcordia Technologies is a trademark of Telcordia Technologies, Inc.

ISO is a registered trademark of The International Organization for Standardization.

UL is a registered trademark of Underwriters Laboratories, Inc.

For additional information, contact your Agere Systems Account Manager or the following:

INTERNET: <http://www.agere.com>

E-MAIL: docmaster@agere.com

N. AMERICA: Agere Systems Inc., 555 Union Boulevard, Room 30L-15P-BA, Allentown, PA 18109-3286

1-800-372-2447, FAX 610-712-4106 (In CANADA: **1-800-553-2448**, FAX 610-712-4106)

ASIA: Agere Systems Hong Kong Ltd., Suites 3201 & 3210-12, 32/F, Tower 2, The Gateway, Harbour City, Kowloon

Tel. (852) 3129-2000, FAX (852) 3129-2020

CHINA: **(86) 21-5047-1212** (Shanghai), **(86) 10-6522-5566** (Beijing), **(86) 755-695-7224** (Shenzhen)

JAPAN: **(81) 3-5421-1600** (Tokyo), KOREA: **(82) 2-767-1850** (Seoul), SINGAPORE: **(65) 6778-8833**, TAIWAN: **(886) 2-2725-5858** (Taipei)

EUROPE: **Tel. (44) 7000 624624**, FAX (44) 1344 488 045

Agere Systems Inc. reserves the right to make changes to the product(s) or information contained herein without notice. No liability is assumed as a result of their use or application. Agere, Agere Systems, and the Agere logo are trademarks of Agere Systems Inc. *NetLight* is a registered trademark of Agere Systems Inc.