

ROITHNER LASERTECHNIK

A-1040 WIEN, FLEISCHMANNGASSE 9

TEL: +43 -1- 586 52 43 FAX: +43 -1- 586 41 43

e-mail: rlt@mcb.at <http://www.roithner.mcb.at>



NSPG500S TECHNICAL DATA

GREEN GaN LED

Peak Wavelength: 525 nm typ.

Output power: 2.0 mW, cw

Package: 5 mm clear plastic

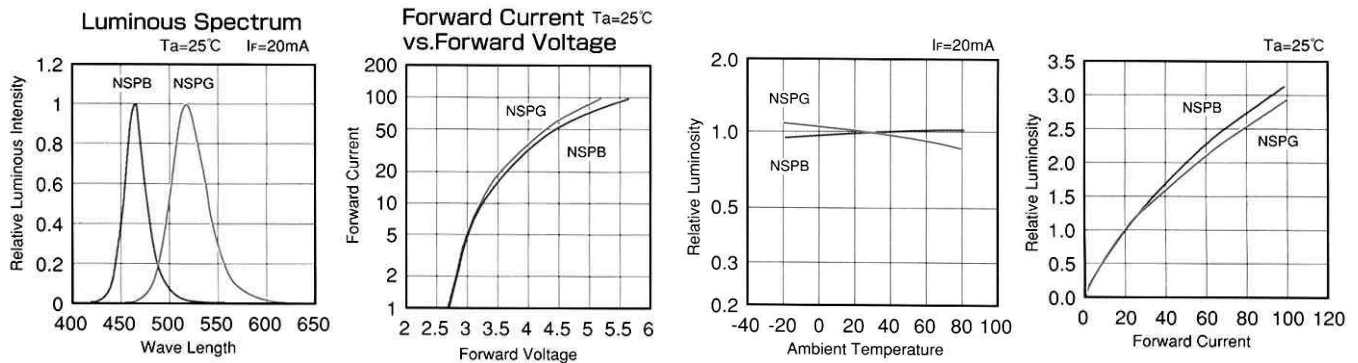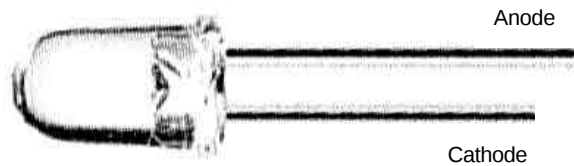

Absolute Maximum Ratings ($T_c = 25^\circ\text{C}$)

CHARACTERISTIC	SYMBOL	RATING	UNIT
DC Forward Current	I_F	30	mA
Pulse Forward Current *)	I_{FP}	100	mA
Allowable Reverse Current	I_R	5	mA
Power Dissipation	P_D	120	mW
Operating Temperature	T_{OP}	$-20 \dots +80$	$^\circ\text{C}$
Storage Temperature	T_{STG}	$-30 \dots +100$	$^\circ\text{C}$

*) Pulse width ≤ 10 ms, duty cycle ≤ 0.1

Optical-Electrical Characteristics ($T_c = 25^\circ\text{C}$)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN	TYP	MAX	UNIT
DC Forward Voltage	V_F	$I_F = 20\text{ mA}$	-	3.5	4.0	V
DC Reverse Current	I_R	$V_R = 5\text{ V}$			50	μA
Optical Output Power	P_O	$I_F = 20\text{ mA}$	-	2.0	-	mW
Peak Wavelength	λ_P	$I_F = 20\text{ mA}$	-	525	-	nm
Spectrum Half Width	$\Delta\lambda$	$I_F = 20\text{ mA}$	-	40	-	nm
Divergence	θ	$I_F = 20\text{ mA}$		15		$^\circ$