

InGaAsP STRAINED MQW DC-PBH PULSED LASER DIODE MODULE FOR 1310 nm OTDR APPLICATION

NDL7513P SERIES

FEATURES

- **HIGH OUTPUT POWER:**
Pf = 110 mW at Ifp = 400 mA¹
- **LONG WAVELENGTH:**
 $\lambda_c = 1310$ nm
- **COAXIAL MODULE WITHOUT THERMOELECTRIC COOLER**
- **SINGLE MODE FIBER PIGTAIL**

Note:

1. Pulse Conditions: Pulse width (PW) = 10 μ s, Duty = 1%.

DESCRIPTION

The NDL7503P Series is a 1310 nm newly developed Strained Multiple Quantum Well (st-MQW) structure pulsed laser diode coaxial module with single mode fiber. It is designed for a light source of optical measurement equipment (OTDR).

ELECTRO-OPTICAL CHARACTERISTICS (T_c = 25°C)

PART NUMBER			NDL7513P Series		
SYMBOLS	PARAMETERS AND CONDITIONS	UNITS	MIN	TYP	MAX
V _{FP}	Forward Voltage, I _{FP} = 400 mA, PW = 10 μ s, Duty = 1%	V		2.5	4.0
I _{TH}	Threshold Current	mA		20	30
P _f	Optical Output Power from Fiber, I _{FP} = 400 mA, PW = 10 μ s, Duty = 1%	mW	70	110	
λ_c	RMS Center Wavelength, I _{FP} = 400 mA, PW = 10 μ s, Duty = 1%	nm	1290	1310	1330
σ	RMS Spectral Width, I _{FP} = 400 mA, PW = 10 μ s, Duty = 1%	nm		4.5	10.0
t _r	Rise Time, 10-90%	ns			1.0
t _f	Fall Time, 90-10%	ns			1.0

ELECTRO-OPTICAL CHARACTERISTICS (T_c = 0 to +60°C)

PART NUMBER			NDL7513P Series		
SYMBOLS	PARAMETERS AND CONDITIONS	UNITS	MIN	TYP	MAX
I _{TH}	Threshold Current	mA			50
P _f	Optical Output Power from Fiber, I _{FP} = 400 mA, PW = 10 μ s, Duty = 1%	mW	50		
λ_c	RMS Center Wavelength, I _{FP} = 400 mA, PW = 10 μ s, Duty = 1%	nm	1280		1342.5
$\Delta\lambda/\Delta T$	Temperature Dependency of Center Wavelength	nm/°C		0.35	
σ	RMS Spectral Width, I _{FP} = 400 mA, PW = 10 μ s, Duty = 1%	dB			10

NDL7513P SERIES

ABSOLUTE MAXIMUM RATINGS¹

(T_C = 25°C, unless otherwise specified)

SYMBOLS	PARAMETERS	UNITS	RATINGS
I _{FP}	Pulsed Forward Current ²	mA	600
V _R	Reverse Voltage	V	2.0
T _C	Operating Case Temperature	°C	-20 to +60
T _{STG}	Storage Temperature	°C	-40 to +85
T _{SLD}	Lead Soldering Temperature (10 sec)	°C	260



Notes:

- 1. Operation in excess of any one of these parameters may result in permanent damage.
- 2. Pulse Condition: Pulse Width (PW) = 10 μs, Duty = 1 %.

ORDERING INFORMATION


PART NUMBER	DESCRIPTION	FLANGE TYPE
NDL7513P	Without Connector	No Flange
NDL7513PC	With FC-PC Connector	
NDL7513PD	With SC-PC Connector	
NDL7513P1	Without Connector	Flat Mount
NDL7513P1C	With FC-PC Connector	Flange
NDL7513P1D	With SC-PC Connector	

TYPICAL PERFORMANCE CURVES (T_C = 25°C, unless otherwise specified)

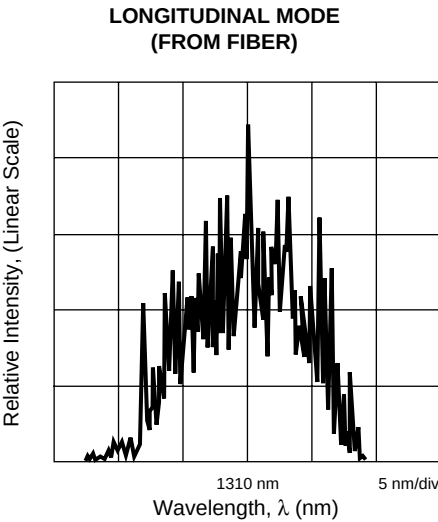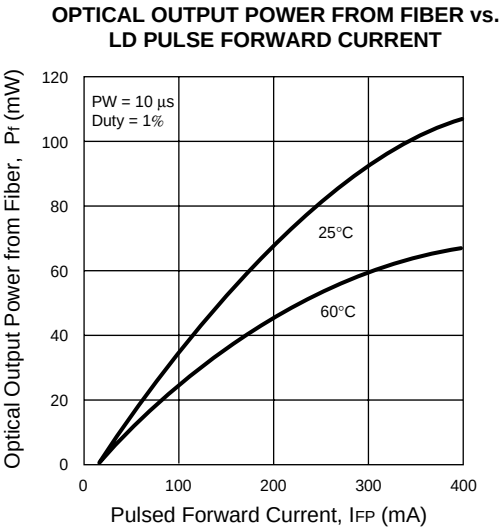


OUTLINE DIMENSIONS (Units in mm)


NDL7513P

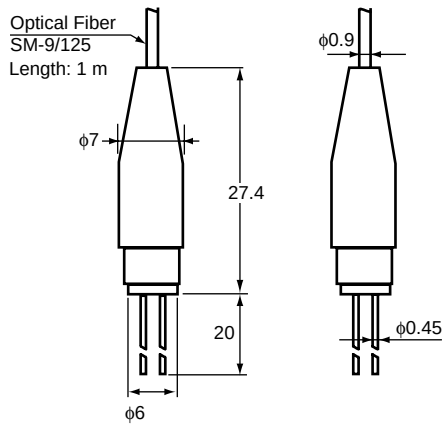


PIN CONNECTIONS



NDL7513P1

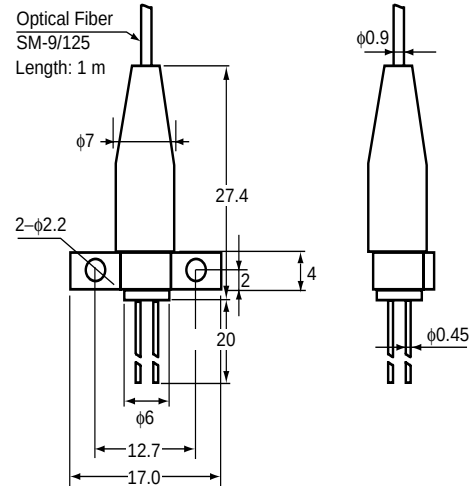

PIN CONNECTIONS



EXCLUSIVE NORTH AMERICAN AGENT FOR **NEC** RF, MICROWAVE & OPTOELECTRONIC SEMICONDUCTORS

CEL CALIFORNIA EASTERN LABORATORIES • Headquarters • 4590 Patrick Henry Drive • Santa Clara, CA 95054-1817 • (408) 988-3500 • Telex 34-6393 • FAX (408) 988-0279
24-Hour Fax-On-Demand: 800-390-3232 (U.S. and Canada only) • Internet: <http://WWW.CEL.COM>

DATA SUBJECT TO CHANGE WITHOUT NOTICE

05/09/2000