



Inductive sensor

Ni8U-S12-AP6X



- threaded barrel, M12 x 1
- plastic, PBT-GF30-V0
- factor 1 for all metals
- degree of protection IP68
- magnetic field immune
- extended temperature range
- high switching frequency
- predamping protection through self-compensation
- 3-wire DC, 10...30 VDC
- normally open pnp output
- cable connection

Wiring diagram



Function principles

Inductive proximity switches are designed for wear-free non-contact detection of metal objects. Due to a ferrite-less 3-coil system, Uprox factor 1 sensor have distinct advantages. The detect all metals at the same switching distance, are magnetic field immune and feature large switching distances.



Type	Ni8U-S12-AP6X
Ident-No.	1644500
Rated operating distance Sn	8 mm
Mounting mode	non-flush, partial flush mountable
Hysteresis (switching distance)	3... 15 %
Min. repeat accuracy	≤ 2 %
Temperature drift	≤ ± 10 %
	≤ ± 15 %, ≤ -25 °C v ≥ +70 °C
Operating temperature	-30 ...+ 85 °C
Rated operational voltage (DC) UB	10... 30 VDC
Max. ripple	≤ 10 % U _{pp}
Rated operational current (DC) I _e	≤ 200 mA
No-load current I ₀	≤ 15 mA
Max. OFF-state current	≤ 0,1 mA
Max. switching frequency	≤ 2 kHz
Rated insulation voltage	≤ 0,5 kV
Output function	3-wire, normally open, PNP
Short-circuit protection	yes, cyclic
Max. voltage drop at I _e	≤ 1,8 V
Wire breakage / reverse polarity protection	yes / complete
Protection class	□
Housing style	threaded barrel; M12 x 1
Dimensions	54 mm
Housing material	plastic, PBT-GF20-V0
Active face	plastic, PBT-GF20-V0
Max. fixing torque of coupling nut	1 Nm
Wiring	cable
Cable	Ø 5,2, LifYY, PVC, 2 m
Cable cross section	3 x 0,34 mm ²
Vibration resistance	55 Hz (1 mm)
Shock resistance	30 x g (11 ms)
Degree of protection	IP68
Switching status indication	LED yellow

Inductive sensor**Ni8U-S12-AP6X****Mounting instructions**

	minimum gap
Gap D	3 x B
Gap W	3 x Sn
Gap T	45 mm
Gap S	0,5 x B
Gap G	6 x Sn
Gap N	2 x Sn

Diameter of active face B

Ø 12 mm

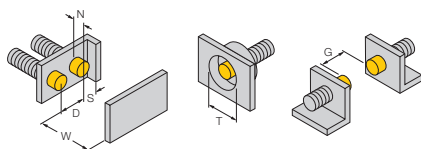

1-side flush mounting possible
1-side flush mounting: $S_r = 6 \text{ mm}$

Inductive sensor**Ni8U-S12-AP6X****Accessories**

Typ	Ident-No.	Description	Dimension drawing
QM-12	6945101	quick-mount fixing clamp with dead-stop; material: chrome-plated brass external thread M16 x 1	
BST-12B	6947212	fixing clamp with dead-stop; material: PA6	