



# **Inductive sensor with extended switching distance Ni75U-CP80-VP4X2**

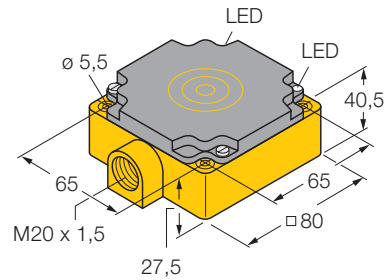

- rectangular, height 41 mm
- plastic, PBT-GF30-V0
- factor 1 for all metals
- magnetic field immune
- extended switching distance
- extended temperature range
- high switching frequency
- 4-wire DC, 10...65 VDC
- SPDT, pnp output
- terminal chamber

## **Wiring diagram**



## **Function principles**

Inductive proximity switches are designed for wear-free non-contact detection of metal objects. Due to a ferrite-less 3-coil system, Uprox factor 1 sensor have distinct advantages. The detect all metals at the same switching distance, are magnetic field immune and feature large switching distances.

|                                                        |                                                                                  |
|--------------------------------------------------------|----------------------------------------------------------------------------------|
| <b>Type</b>                                            | Ni75U-CP80-VP4X2                                                                 |
| Ident-No.                                              | 1540800                                                                          |
| <b>Rated operating distance <math>S_n</math></b>       | 75 mm                                                                            |
| Mounting mode                                          | non-flush                                                                        |
| Hysteresis (switching distance)                        | 3... 15 %                                                                        |
| Min. repeat accuracy                                   | $\leq 2 \%$                                                                      |
| Temperature drift                                      | $\leq \pm 10 \%$                                                                 |
| Operating temperature                                  | $\leq \pm 15 \%, \leq -25 \text{ °C} \vee \geq +70 \text{ °C}$<br>-30 ...+ 85 °C |
| <b>Rated operational voltage (DC) <math>U_B</math></b> | 10... 65 VDC                                                                     |
| Max. ripple                                            | $\leq 10 \% U_{pp}$                                                              |
| Rated operational current (DC) $I_e$                   | $\leq 200 \text{ mA}$                                                            |
| No-load current $I_0$                                  | $\leq 15 \text{ mA}$                                                             |
| Max. OFF-state current                                 | $\leq 0,1 \text{ mA}$                                                            |
| Max. switching frequency                               | $\leq 0,25 \text{ kHz}$                                                          |
| Rated insulation voltage                               | $\leq 0,5 \text{ kV}$                                                            |
| Output function                                        | 4-wire, complementary, PNP                                                       |
| Short-circuit protection                               | yes, cyclic                                                                      |
| Max. voltage drop at $I_e$                             | $\leq 1,8 \text{ V}$                                                             |
| Wire breakage / reverse polarity protection            | yes / complete                                                                   |
| Protection class                                       | IP67                                                                             |
| <b>Housing style</b>                                   | rectangular; CP80                                                                |
| Dimensions                                             | 80 x 80 x 41 mm                                                                  |
| Housing material                                       | plastic, PBT-GF30-V0                                                             |
| Active face                                            | plastic, PBT-GF30-V0                                                             |
| Wiring                                                 | terminal chamber                                                                 |
| Clamping ability                                       | $\leq 2,5 \text{ mm}^2$                                                          |
| Vibration resistance                                   | 55 Hz (1 mm)                                                                     |
| Shock resistance                                       | 30 x g (11 ms)                                                                   |
| Degree of protection                                   | IP67                                                                             |
| <b>Supply voltage indication</b>                       | LED green                                                                        |
| Switching status indication                            | LED yellow                                                                       |

## Inductive sensor with extended switching distance Ni75U-CP80-VP4X2

---

**Mounting instructions**

|       |                      |
|-------|----------------------|
| Gap D | minimum gap<br>3 x B |
| Gap W | 3 x Sn               |
| Gap S | 1,5 x B              |
| Gap G | 6 x Sn               |
| Gap N | 1 x B                |
| Gap A | 1 x B                |
| Gap C | 1 x B                |

---

**Width of active face B**

80 mm

