
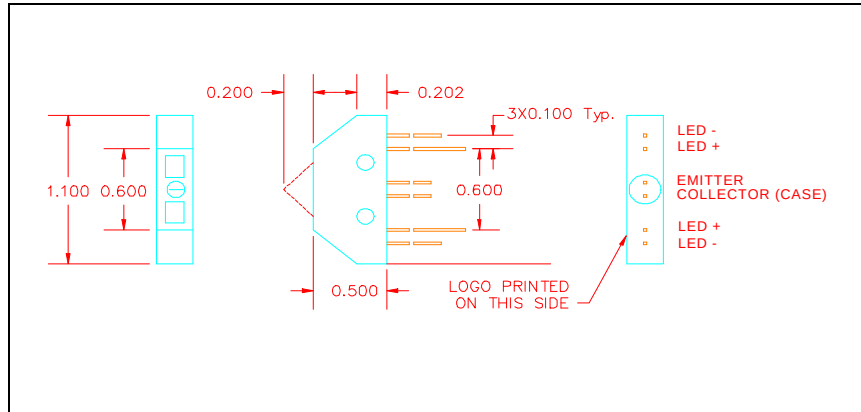


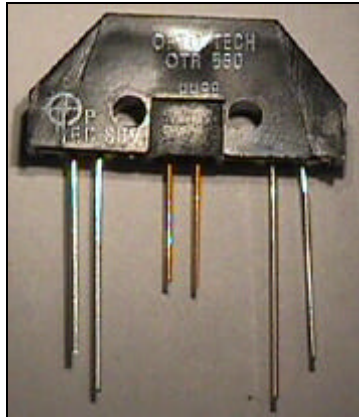

FEATURES:

- Bar code reader / fine line sensor
- 0.007" - 0.013" resolution
- Compact size
- Plastic lens

PRODUCT DESCRIPTION

Opto Technology's OTR 580/590 series combines two emitters, a lens and photodetector into one low cost plastic housing. The rectangular aperture inside the package offers high resolution with good depth of field. The OTR 580 has two 940nm infrared emitting diodes with PIN Diode or Phototransistor and the OTR 590 series has two 660nm visible light emitting diodes with either sensor option. Custom apertures for these devices are available upon request.

ABSOLUTE MAXIMUM RATINGS

General

Storage Temperature Range ----- - 55°C to +100°C
 Operating Temperature Range ----- - 40°C to +85°C
 Lead Soldering Temperature (1/16" from case
 for 5 seconds soldering iron, 10 seconds flow soldering) ----- 260°C

Infrared Emitter (940 nm)

Reverse Voltage ----- 5 V
 Continuous Forward Current ----- 50 mA
 Power Dissipation ----- 100 mW

Visible Emitter (660 nm)

Reverse Voltage ----- 5 V
 Continuous Forward Current ----- 50mA
 Power Dissipation ----- 100 mW

Phototransistor

Collector-Emitter Voltage ----- 35 V
 Emitter-Collector Voltage ----- 6 V
 Power Dissipation (Derate 2.4 mW/°C above 25°C) ----- 250 mW

PIN Diode

Reverse Voltage ----- 35V
 Dark Current $V_r=20V$ ----- 150nA
 Power Dissipation (Derate 1.5 mW/°C above 25°C) ----- 150 mW



OPTO TECHNOLOGY, INC.

562 Chaddick Drive, Wheeling, IL 60090
 Phone: (847) 537-4277 FAX: (847) 537-4785
 Web: www.optotech.com

Infrared Emitter

Parameter	Symbol	Min	Typ	Max	Units
Forward Voltage ($I_F = 50 \text{ mA}$)	V_F		1.3	1.45	V
Reverse Current ($V_R = 5 \text{ V}$)	I_R			100	μA
Peak Wavelength ($I_F = 20 \text{ mA}$)	λ_P		940		nm
Radiant Intensity ($I_F = 20 \text{ mA}$)	I	1.3	2.5		mW/sr
Spectral Bandwidth at 50% ($I_F = 20 \text{ mA}$)	$\Delta\lambda$		50		nm
Half Intensity Beam Angle	θ		10		Degrees

Visible Emitter

Parameter	Symbol	Min	Typ	Max	Units
Forward Voltage ($I_F = 20 \text{ mA}$)	V_F		1.8	2.4	V
Reverse Current ($V_R = 5 \text{ V}$)	I_R			100	μA
Peak Wavelength ($I_F = 20 \text{ mA}$)	λ_P		660		nm
Luminous Intensity ($I_F = 20 \text{ mA}$)	I_V	250	500		mcd
Spectral Bandwidth at 50% ($I_F = 20 \text{ mA}$)	$\Delta\lambda$		20		nm
Half Intensity Beam Angle	θ		10		Degrees

Phototransistor

Parameter	Symbol	Min	Typ	Max	Units
Light Current ($E_e=1.0\text{mW/cm}^2$, $V_{CE}=5\text{V}$)	$I_{CE(ON)}$	1	2.8		mA
Dark Current ($E_e=0$, $V_{CE}=10\text{V}$)	I_{CE0}			60	nA
Saturation Voltage ($I_C=1.0\text{mA}$)	$V_{CE(SAT)}$			0.5	V
Rise Time ($V_{CC}=5\text{V}$, $R_L=100\Omega$)	T_r		6		μs
Fall Time ($V_{CC}=5\text{V}$, $R_L=100\Omega$)	T_f		8		μs

Pin Diode

Parameter	Symbol	Min	Typ	Max	Units
Light Current ($E_e=1.0\text{mW/cm}^2$)	I_L	8	20		μA
Dark Current ($E_e=0$, $V_r=20\text{V}$)	I_D			100	nA
Total Capacitance ($V=0$, $f=1 \text{ MHz}$)	C_t		40		pF
Rise Time ($R_L=1\text{k}\Omega$)	T_r		1		μs
Fall Time ($R_L=1\text{k}\Omega$)	T_f		1		μs

Coupled Characteristics

Parameter	Symbol	Min	Typ	Max	Units
Light Current ($I_F = 20 \text{ mA}$, $V_{CE} = 5 \text{ V}$, $d = 0.175 \text{ in}$, OTR580-X1X) ¹	$I_{CE(ON)}$	2.0			μA
Dark Current ($I_F = 0 \text{ mA}$, $V_{CE} = 5 \text{ V}$, OTR580-X1X) ²	I_{CE0}			200	nA
Light Current ($I_F = 20 \text{ mA}$, $V_{CC} = 5 \text{ V}$, $d = 0.175 \text{ in}$, OTR581-X1X) ¹	$I_{CE(ON)}$	0.10			μA
Dark Current ($I_F = 0 \text{ mA}$, $V_{CC} = 5 \text{ V}$, OTR581-X1X) ²	I_{CE0}			5	nA
Light Current ($I_F = 20 \text{ mA}$, $V_{CE} = 5 \text{ V}$, $d = 0.175 \text{ in}$, OTR590-X1X) ¹	$I_{CE(ON)}$	2.0			μA
Dark Current ($I_F = 0 \text{ mA}$, $V_{CE} = 5 \text{ V}$, OTR590-X1X) ²	I_{CE0}			200	nA
Light Current ($I_F = 20 \text{ mA}$, $V_{CC} = 5 \text{ V}$, $d = 0.175 \text{ in}$, OTR591-X1X) ¹	$I_{CE(ON)}$	0.10			μA
Dark Current ($I_F = 0 \text{ mA}$, $V_{CC} = 5 \text{ V}$, OTR591-X1X) ²	I_{CE0}			5	nA

¹ Reflecting surface is Eastman Kodak neutral white test card having a 90% diffused reflectance.² No reflective surface

Reflective Surface

Parameter	Symbol	Min	Typ	Max	Units
Element Contrast		(80%)			%
Diffused Reflectance		(90%)			%
Element Width (0.003x0.045 Aperture)	W_N	0.007			in
Narrow Element to Narrow Space Ratio			0.95		



Product Specifications ($T_A = 25^\circ\text{C}$ unless noted)

OPTO TECHNOLOGY, INC.

562 Chaddick Drive, Wheeling, IL 60090
 Phone: (847) 537-4277 FAX: (847) 537-4785
 Web: www.optotech.com

REV. O (01/00)

ORDERING INFORMATION

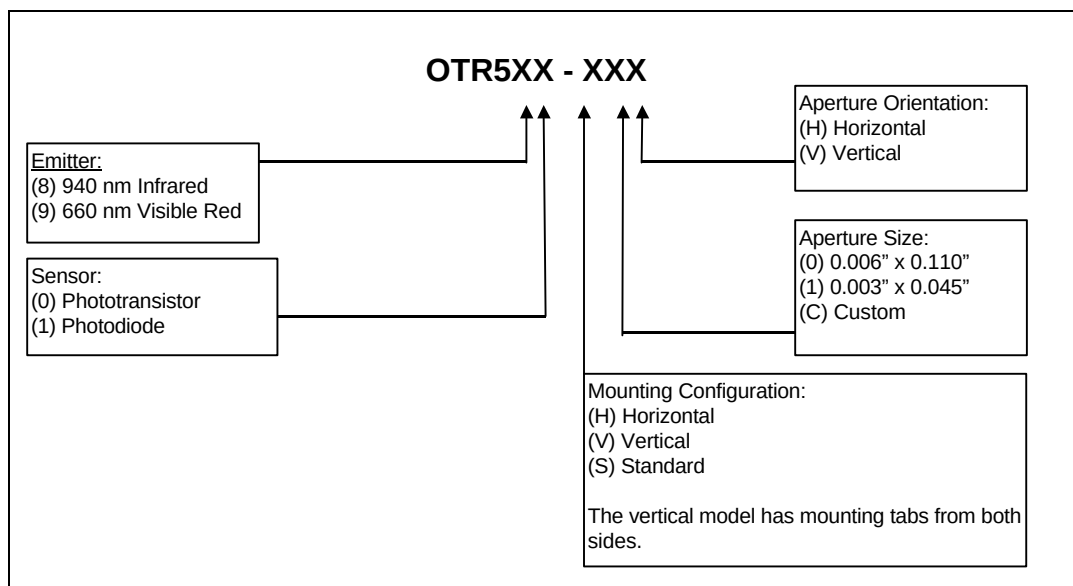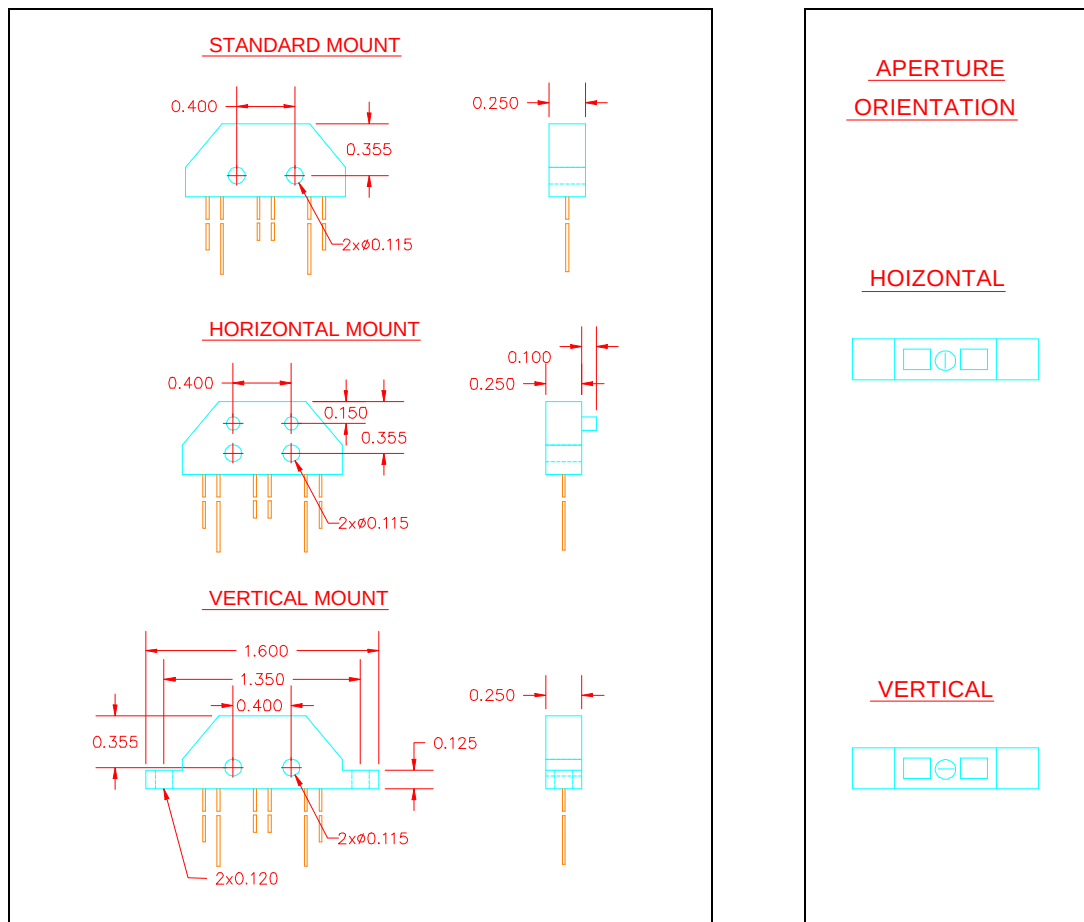

OPTO TECHNOLOGY, INC.

562 Chaddick Drive, Wheeling, IL 60090
Phone: (847) 537-4277 FAX: (847) 537-4785
Web: www.optotech.com