


1xN PLC Splitters

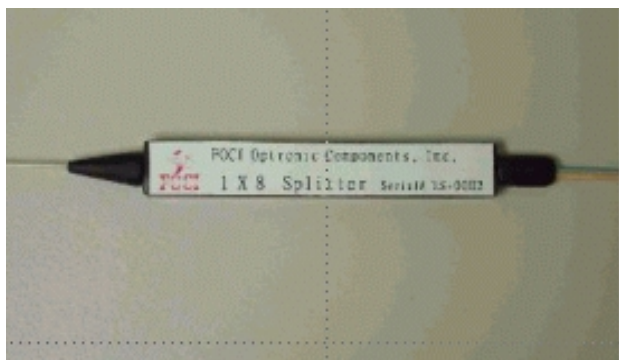

FEATURES

- ◆ Easy Installation
- ◆ Custom-Defined Specifications
- ◆ Low Return Loss
- ◆ Low Insertion Loss
- ◆ Wideband and single band designs
- ◆ High Reliability


PERFORMANCE

ITEM	1xN Splitters		
Type	1x8	1x16	1x32
Insertion Loss, dB	< 11.5	< 14.5	< 18
Uniformity, dB	< 1.0	< 1.5	< 2.5
Operating Wavelength, nm	1260 ~ 1600		
Directivity, dB	≥ 50		
Optical Input Return Loss, dB	≥ 50		
Polarization Dependent Loss, dB	≤ 0.5		
Tensile Load, N	> 5		
Storage Temperature, °C	-40 ~ 85		
Operating Temperature, °C	-20 ~ 70		
Package Size, mm	80 x 10.5 x 6		
Connectors	FC, SC, LC, MU or ribbon		

* Without connector loss

FEATURES

- ◆ Metro
- ◆ Network Protection
- ◆ Monitoring
- ◆ Access/PON distribution
- ◆ CATV

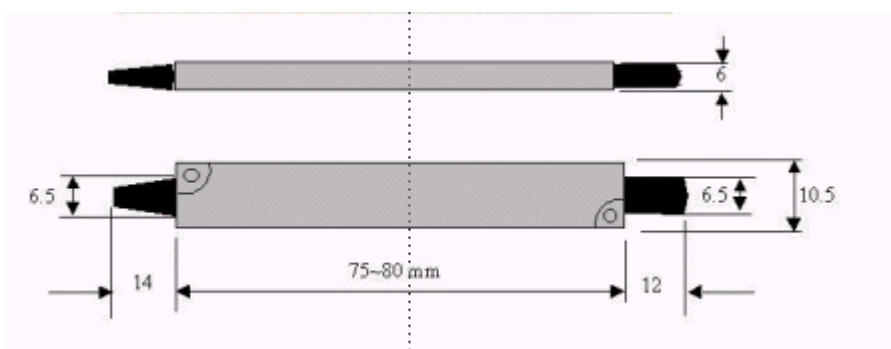

ORDERING INFORMATION

O - TS - □□ - □ - □ - □□/□□

Fiber Channel Number _____

08 1x8 splitter 16 1x16 splitter
32 1x32 splitter 40 1x40 splitter
XX Others, please specify

Fiber Type _____

A Standard Single mode fiber (250μm)
X Others, please specify

Pigtail Length _____

1 1 meter A 0.5 meter
2 2 meter B 1.5 meter
X Others, please specify

Connector Type (Input/Output) _____

FC FC type AP FC/APC type
SC SC type AS SC/APC type
MT MT type LC LC type
NC None XX Others, please specify