



UNCONTROLLED DOCUMENT

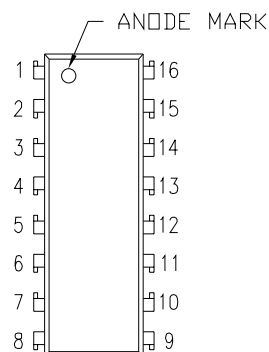

TOP VIEW





NOTES:

1,3,5,7. ANODE
2,4,6,8. CATHODE
9,11,13,15. EMITTER
10,12,14,16. COLLECTOR

CAUTION: STATIC SENSITIVE DEVICE
FOLLOW PROPER E.S.D. HANDLING PROCEDURES
WHEN WORKING WITH THIS PART.

PART NUMBER TABLE	
PART= /X	CTR (%)
/A	600 TO 2000
/B	1500 TO 4000
/C	3000 TO 6000
/D	5000 TO 9000
/E	600 TO 9000

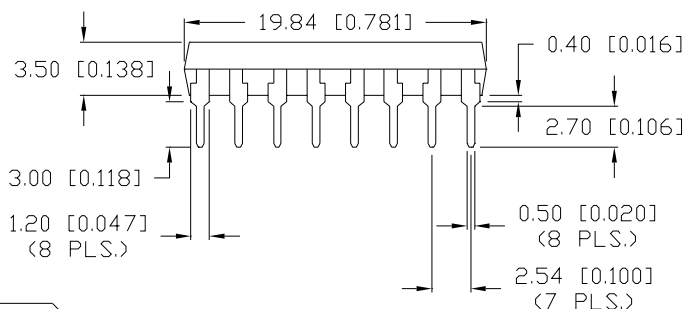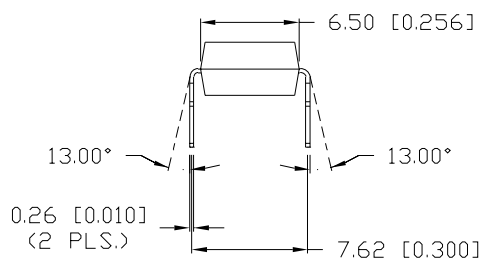

ELECTRO-OPTICAL CHARACTERISTICS (Ta=25°C)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
I FORWARD VOLTAGE	V _F	I _F =20mA	—	1.2	1.4	V
PEAK FORWARD VOLTAGE	V _{FM}	I _{FM} =0.5A	—	—	3.5	V
REVERSE CURRENT	I _R	V _R =4V	—	—	10	μA
TERMINAL CAPACITANCE	C _t	V=0, f=1kHz	—	30	—	pF
O COLLECTOR DARK CURRENT	I _{CEO}	V _{CE} =200V, I _F =0	—	—	10 ⁻⁶	A
T CURRENT TRANSFER RATIO	CRT	I _F =1mA, V _{CE} =2V	600	—	9000	%
COLLECTOR-EMITTER SATURATION VOLTAGE	V _{CE(sat)}	I _F =20mA, I _C =5mA	—	—	1.5	V
ISOLATION RESISTANCE	R _{iso}	DC500V	5x10 ¹⁰	—	—	ohm
FLOATING CAPACITANCE	C _f	V=0, f=1MHz	—	0.6	1.0	pF
CUT-OFF FREQUENCY	f _c	V _{CE} =5V, I _C =2mA, R _L =100ohm	—	7	—	kHz
RESPONSE TIME (RISE)	t _r	V _{CE} =2V, I _C =20mA, R _L =100ohm	—	60	300	μS
RESPONSE TIME (FALL)	t _f	V _{CE} =2V, I _C =20mA, R _L =100ohm	—	50	250	μS

I=INPUT, O=OUTPUT, T=TRANSFER CHARACTERISTICS.

ABSOLUTE MAXIMUM RATINGS (Ta=25°C)				
PARAMETER	SYMBOL	MAX	UNITS	
I FORWARD CURRENT	I _F	50	mA	
PEAK FORWARD CURRENT	I _{FM}	1	A	
REVERSE VOLTAGE	V _R	6	V	
POWER DISSIPATION	P _d	70	mW	
O COLLECTOR-EMITTER VOLTAGE	V _{CEO}	300	V	
EMITTER-COLLECTOR VOLTAGE	V _{ECO}	0.1	V	
COLLECTOR CURRENT	I _C	150	mA	
COLLECTOR POWER DISSIPATION	P _C	200	mW	
TOTAL POWER DISSIPATION	P _{tot}	200	mW	
ISOLATION VOLTAGE 1 MIN.	V _{iso}	5000	V _{RMS}	
OPERATING TEMP.	T _{opr}	- 30 TO + 100	°C	
STORAGE TEMP.	T _{stg}	- 55 TO + 125	°C	
SOLDERING TEMP.	T _{sol}	+ 260	°C	
2.0mm FROM BODY			10 SEC. MAX	

I=INPUT, O=OUTPUT.

UNCONTROLLED DOCUMENT

*UNLESS OTHERWISE SPECIFIED TOLERANCE IS ±0.25mm (±0.010")

REV.

PART NUMBER

OCP-PCD4116/X

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.

LUMEX
INCORPORATED

290 E. HELLEN ROAD
PALATINE, ILLINOIS 60067
PHONE: 1-847-359-2790
WEB: HTTP://WWW.LUMEX.COM

DRAWN BY: CHECKED BY: APPROVED BY: DATE: 9-29-99

PAGE: 1 OF 1

SCALE: N/A

SIXTEEN DIP QUAD CHANNEL PHOTOCOUPLER,

PHOTODARLINGTON OUTPUT, NO EXTERNAL BASE CONNECTION.

CK/DU